

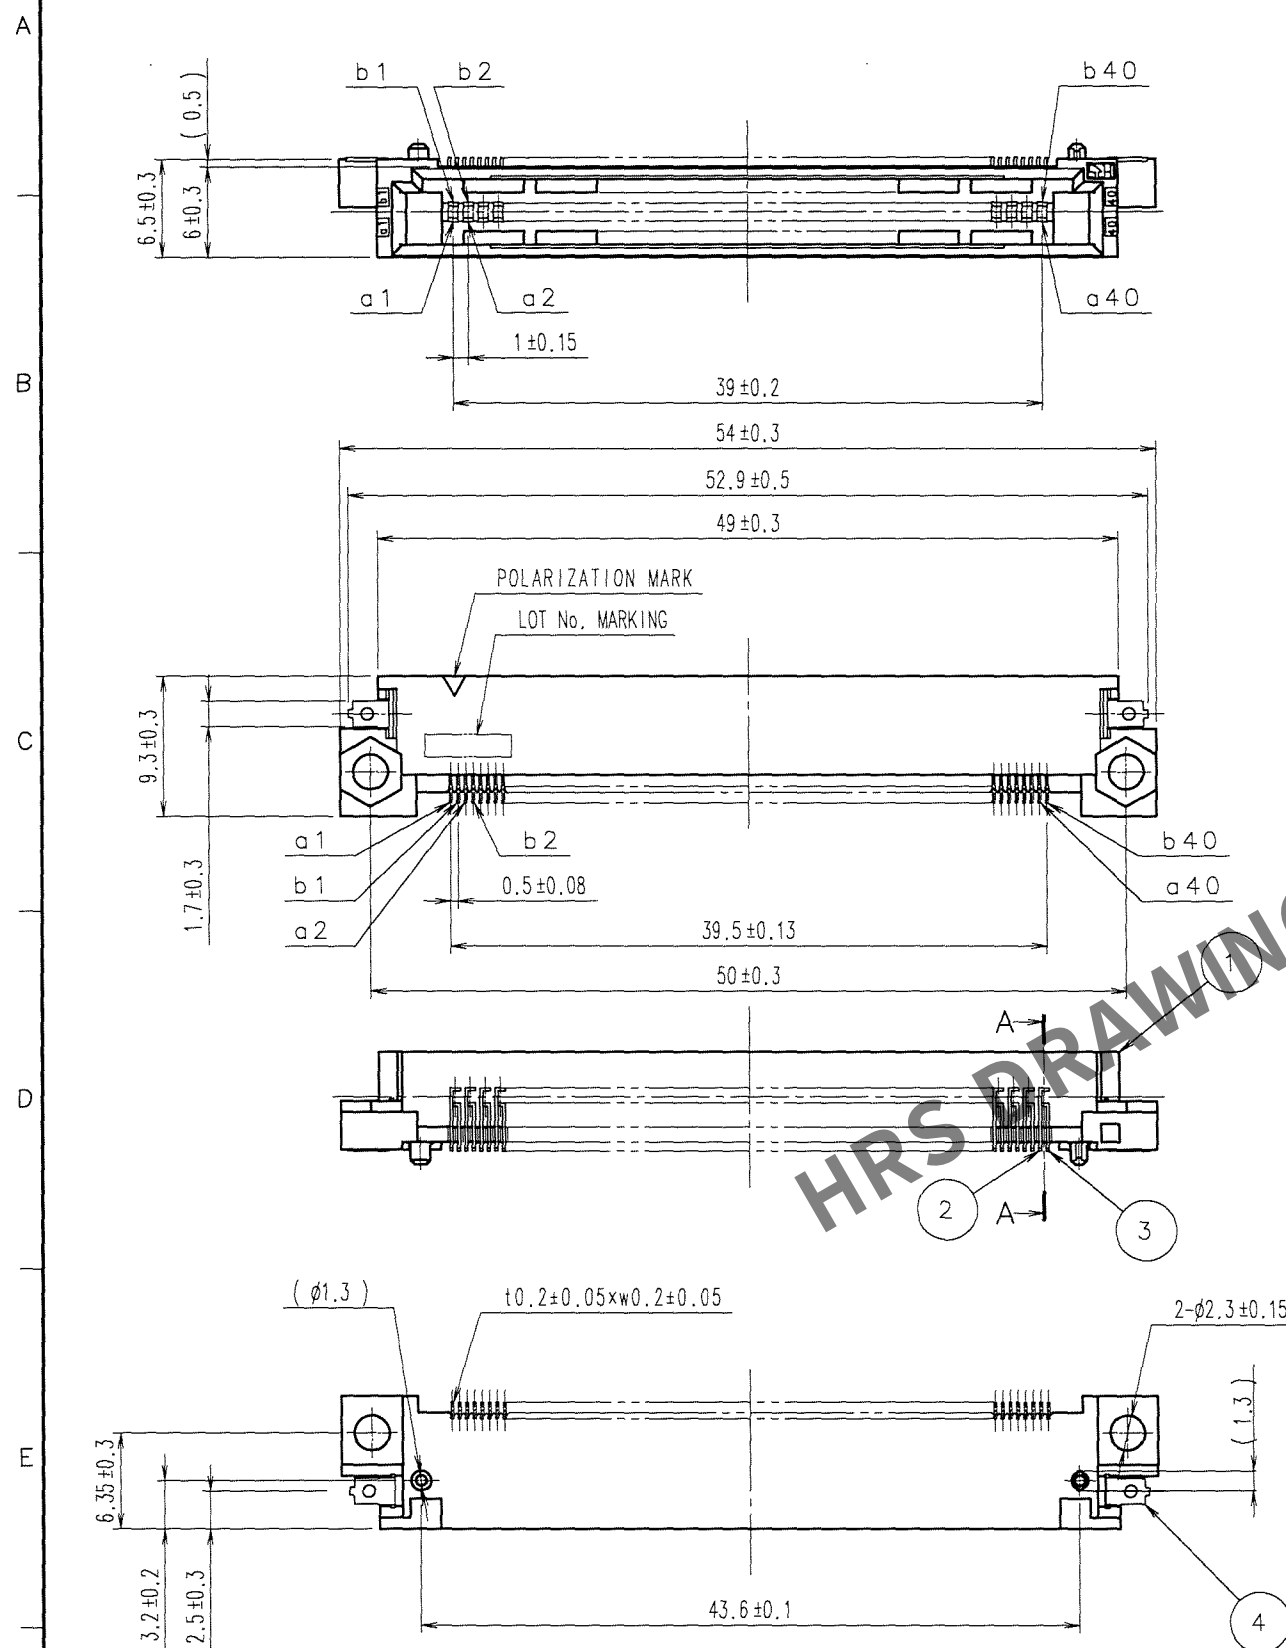



Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

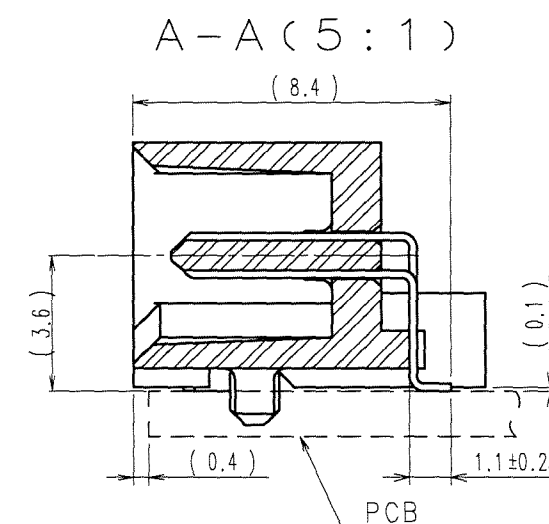

NOTES 1. LEAD CO-PLANARITY INCLUDING REINFORCED METAL FITTINGS TO BE 0.1 MAX.
2. NOTE THAT THE REFERENCE TIGHTENING TORQUE IS 0.15 N · m.
3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

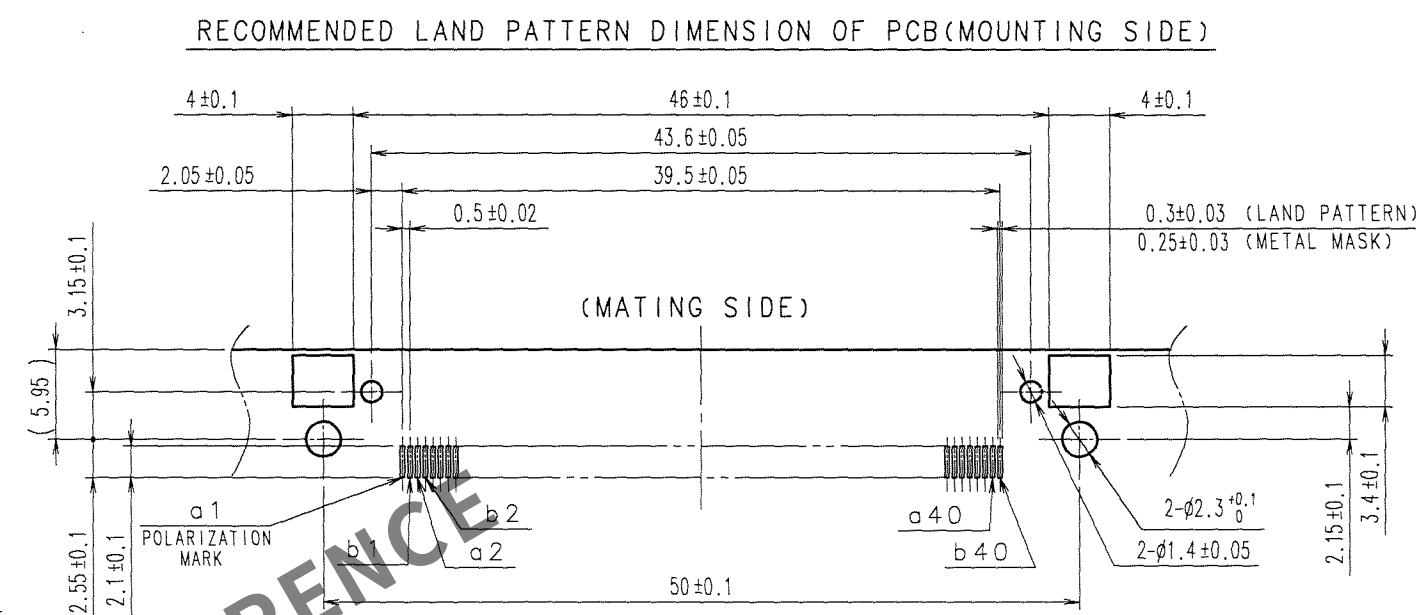

4		BRASS	TIN-PLATING	2, 3	BRASS	CONTACT AREA: GOLD 0.1μm min.					
1		POLYAMIDE	BEIGE			UL94V-0	LEAD AREA: TIN-PLATING 1μm min.				
							UNDER PLATING: NICKEL 1μm min.				
NO.		MATERIAL		FINISH, REMARKS		NO.		MATERIAL		FINISH, REMARKS	
CODE NO. (OLD) CL				DRAWN <i>K. Doi</i> 07.02.20		DESIGNED <i>K. Doi</i> 07.02.20		CHECKED <i>K. Ogiwara</i> 07.02.20		APPROVED <i>H. Okawa</i> 07.02.20	
		DRAWING NO. EDC3-151514-21				PART NO. (PROVISIONAL NAME) FX5-80P-SH(71)					
SCALE 2 : 1		 HIROSE ELECTRIC CO., LTD.				CODE NO. CL575-0009-9-71					
UNITS mm											
											