



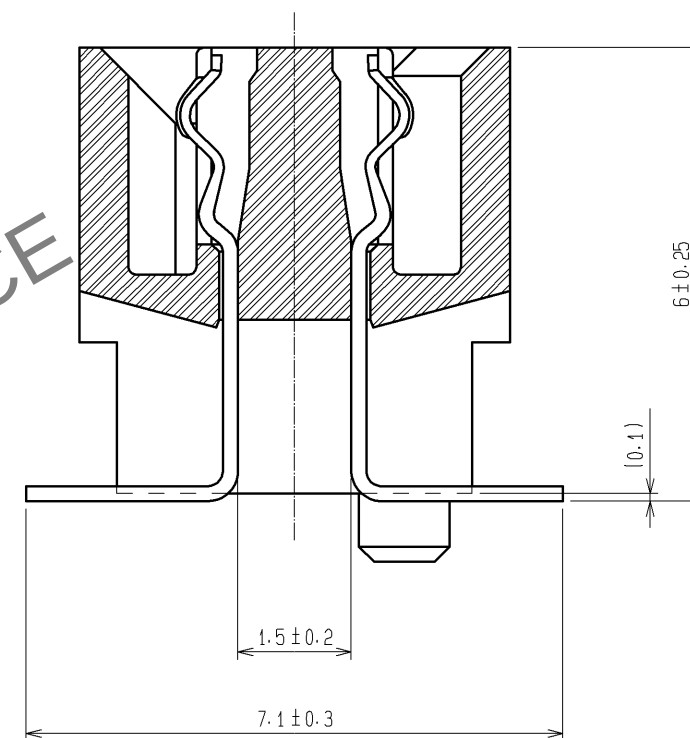

Technical drawing of a rectangular plate with dimensions and tolerances. The drawing includes a central horizontal dashed line and a central vertical dashed line. The overall width is 35.2 ± 0.05 . The overall height is 6.1 ± 0.1 . The distance from the left edge to the center of the left hole is 8.1 ± 0.1 . The distance from the right edge to the center of the right hole is 2 ± 0.05 . The distance between the centers of the two holes is 31.2 ± 0.05 . The distance from the top edge to the center of the top hole is 1.5 ± 0.05 . The distance from the bottom edge to the center of the bottom hole is 1.45 ± 0.05 . The distance from the left edge to the center of the left hole is 0.8 ± 0.05 . The distance from the right edge to the center of the right hole is 0.5 ± 0.03 . The diameter of the left hole is $\phi 1 \pm 0.05$. The diameter of the right hole is $\phi 1.3 \pm 0.05$. The text "POSITION OF POLARIZATION MARK" is written below the right hole.

- | | | | | | | | | | |
|---|----------|-----------------------|------------|-----------------|--------------------------------|------------------|----------|---------|------|
| 1 | PPS | LIGHT BROWN (UL94V-0) | 2 | PHOSPHOR BRONZE | CONTACT AREA:GOLD 0.1μm min. | | | | |
| | | | | | LEAD AREA:TIN-PLATING 1μm min. | | | | |
| | | | | | UNDER PLATING:NICKEL 2μm min. | | | | |
| NO. | MATERIAL | FINISH . REMARKS | | NO. | MATERIAL | FINISH . REMARKS | | | |
| UNITS
mm | | SCALE
2 : 1 | | COUNT | DESCRIPTION OF REVISIONS | | DESIGNED | CHECKED | DATE |
|  HIROSE
ELECTRIC
CO., LTD. | | APPROVED : HS. OKAWA | 07. 06. 20 | DRAWING
NO. | EDC3-084984-23 | | | | |
| | | CHECED : HS. OZAWA | 07. 06. 20 | PART
NO. | FX6-80S-0. 8SV2(93) | | | | |
| | | DESIGNED : KT. DOI | 07. 06. 20 | CODE
NO. | CL576-0127-1-93 | | | | |
| | | DRAWN : TS. MIYAKI | 07. 06. 14 | | | | | | |
| | | | | | | | | | |

Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

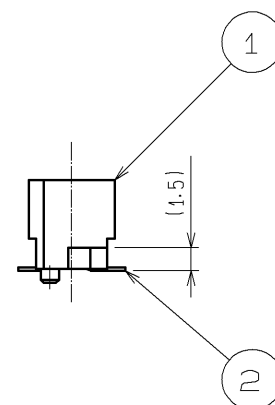