

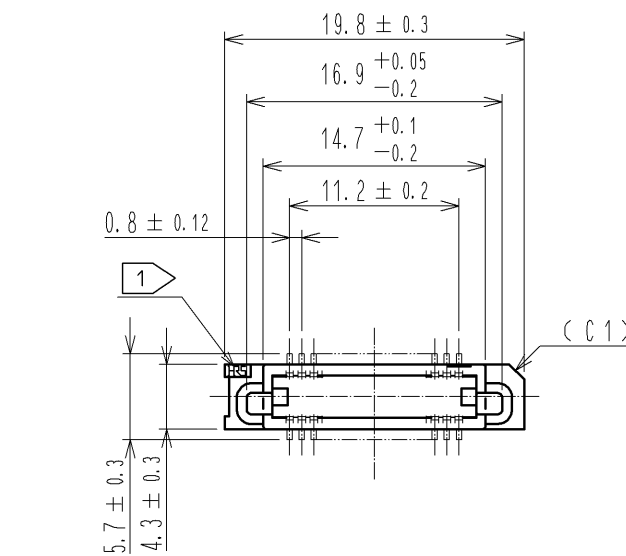


POLARIZATION MARK

RECOMMENDED LAND PATTERN DIMENSION OF PCB (MOUNTING SIDE)
(RECOMMENDED METAL MASK THICKNESS $t=0.15$)

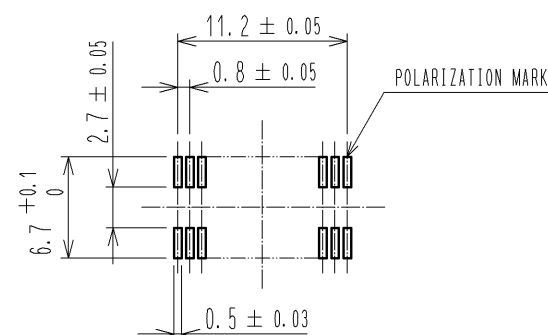

A-A (10 : 1)

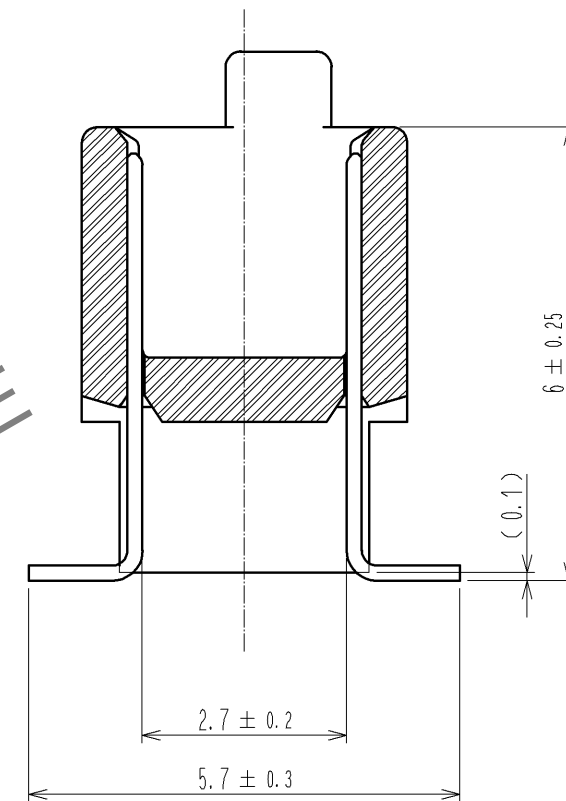

- NOTE
- 1 HRS MARK SHALL BE OPTIONAL.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 - 3 EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT. SEE NEXT PAGE FOR DETAILS.
 - 4 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP. SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
 - 5 FOR MODIFICATION, ETC. PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
 - 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 7 1 REEL : 1000 CONNECTORS.
 - 8 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.		5	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
		LEAD AREA:TIN-PLATING 1μm min.		4	POLYESTER	(COVER TAPE)
		UNDER PLATING:NICKEL 1μm min.		3	POLYSTYRENE	(EMBOSSED CARRIER TAPE)
1	PPS	LIGHT BROWN (UL94V-0)				
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT △	DESCRIPTION OF REVISIONS		DESIGNED
HRS		HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA 13. 08. 28		CHECKED
				CHECKED : HT. YAMAGUCHI 13. 08. 27		DATE
				DESIGNED : TH. SANO 13. 08. 27		
				DRAWN : TH. SANO 13. 08. 27		
				DRAWING NO. EDC3-156318-02		
				PART NO. FX6A-30P-0.8SV2(93)		
				CODE NO. CL576-0242-0-93		
				△ 1/2		

