
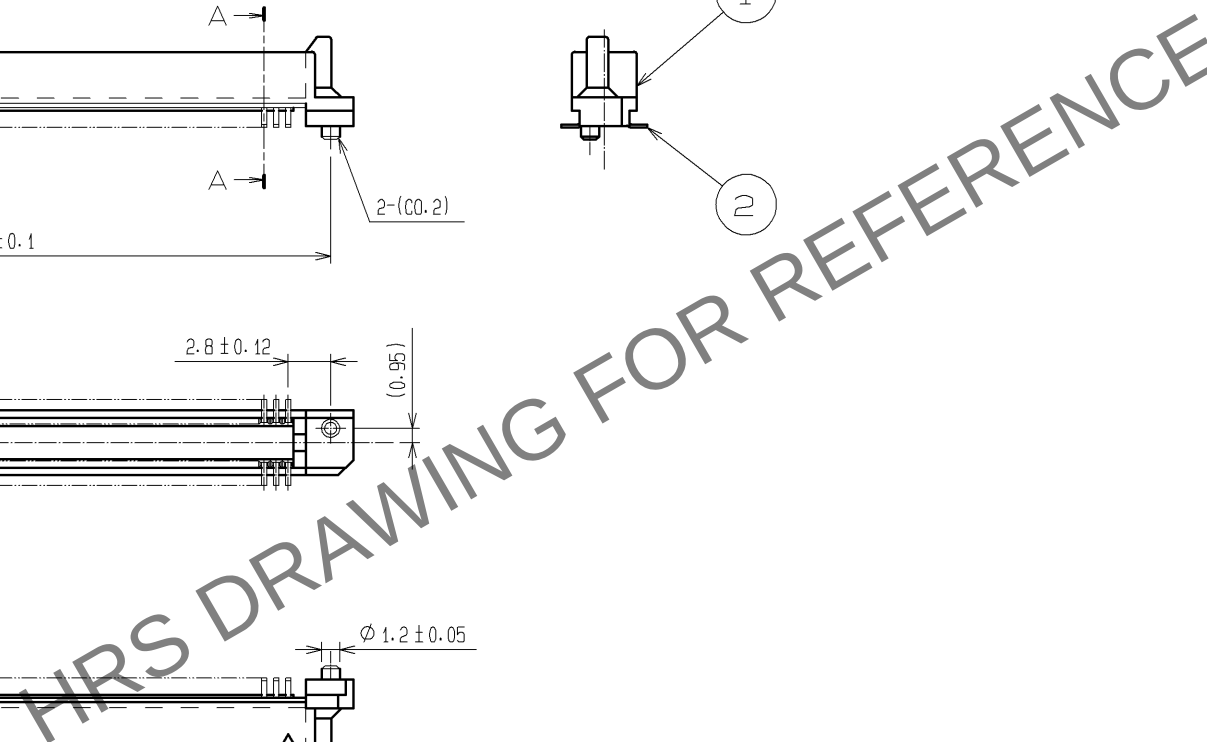




Technical drawing of a rectangular plate with dimensions and tolerances. The drawing includes a central vertical dashed line and two horizontal dashed lines. The dimensions are as follows:

- Overall width: 44.8 ± 0.05
- Distance from left edge to first vertical feature: 39.2 ± 0.05
- Distance from first vertical feature to right edge: 2.8 ± 0.05
- Overall height: 6.7 ± 0.1
- Distance from top edge to first horizontal feature: 2.7 ± 0.05
- Distance from first horizontal feature to bottom edge: 0.95 ± 0.05
- Distance between the two horizontal features: 0.5 ± 0.03
- Distance between the two vertical features: 0.8 ± 0.05
- Left circular feature: $\phi 1 \pm 0.05$
- Right circular feature: $\phi 1.3 \pm 0.05$
- Label: POLARIZATION MARK

- | | | | | | | | | | |
|--|------------------------|------------------|----------------|----------------------|--------------------------|--------------------------------|---------|------|--|
| 1 | PPS | LIGHT BROWN | UL94V-0 | 2 | PHOSPHOR BRONZE | CONTACT AREA:GOLD 0.1μm min. | | | |
| | | | | | | LEAD AREA:TIN-PLATING 1μm min. | | | |
| | | | | | | UNDER PLATING:NICKEL 1μm min. | | | |
| NO. | MATERIAL | FINISH . REMARKS | | NO. | MATERIAL | FINISH . REMARKS | | | |
| UNITS
mm | | SCALE
2 : 1 | | COUNT | DESCRIPTION OF REVISIONS | DESIGNED | CHECKED | DATE | |
| HRS HIROSE
ELECTRIC
CO., LTD. | APPROVED :HS. OKAWA | 08. 06. 26 | DRAWING
NO. | EDC3-084975-25 | | | | | |
| | CHECKED :HT. YAMAGUCHI | 08. 06. 25 | PART
NO. | FX6-100P-0. 8SV1(71) | | | | | |
| | DESIGNED :SY. KAMIGA | 08. 06. 23 | CODE
NO. | CL576-0028-0-71 | | | | | |
| | DRAWN :TP. MATSUMOTO | 08. 06. 18 | | | | | | | |
| | | | | | | | | | |