


Technical drawing of a 100mm diameter hole in a plate. The drawing shows a top view and a side view. The top view shows a 100mm diameter hole with a 10mm diameter hole centered on it. The side view shows the hole depth and the hole diameter. The dimensions are as follows:

- Hole diameter: $\varnothing 100 \pm 0.05$
- Hole spacing: 10 ± 0.05
- Hole depth: 10 ± 0.05
- Hole diameter (inner): $\varnothing 10 \pm 0.05$
- Hole spacing (inner): 10 ± 0.05
- Hole depth (inner): 10 ± 0.05

PART No.	CODE No.		A	B	C	D	E
FX8C- 60S-SV(92)	CL578-0801-2-92	60	24.60	23.05	20.80	17.40	22.20
FX8C- 80S-SV(92)	CL578-0803-8-92	80	30.60	29.05	26.80	23.40	28.20
FX8C-100S-SV(92)	CL578-0805-3-92	100	36.60	35.05	32.80	29.40	34.20
FX8C-120S-SV(92)	CL578-0806-6-92	120	42.60	41.05	38.80	35.40	40.20
FX8C-140S-SV(92)	CL578-0807-9-92	140	48.60	47.05	44.80	41.40	46.20

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT.
SEE NEXT PAGE FOR DETAILS.
3. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
4. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
- ⑤ NUMBER OF CONTACTS.

			4		POLYESTER	(TOP COVER TAPE)		
			3		PS 	(EMBOSSED CARRIER TAPE)		
1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1#m min.			
					LEAD AREA:GOLD FLASH			
					UNDER PLATING:NICKEL 0.5#m min.			
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		


UNITS mm		SCALE FREE		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-006425	DESIGNED CR. TAKESHIMA	CHECKED HT. YAMAGUCHI	DATE 12. 10. 15
 HIROSE ELECTRIC CO., LTD.		APPROVED :KJ. KATAYOSE		05. 01. 05	DRAWING NO.	EDC3-151022-22		
		CHECKED :HS. OKAWA		05. 01. 05		PART NO.	FX8C-*S-SV(92)	
		DESIGNED :KT. DOI		05. 01. 05	CODE NO.			
		DRAWN :KT. DOI		05. 01. 05				

 1 / 2



Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING (2:1)

UNREELING DIRECTION





REEL DIMENSION

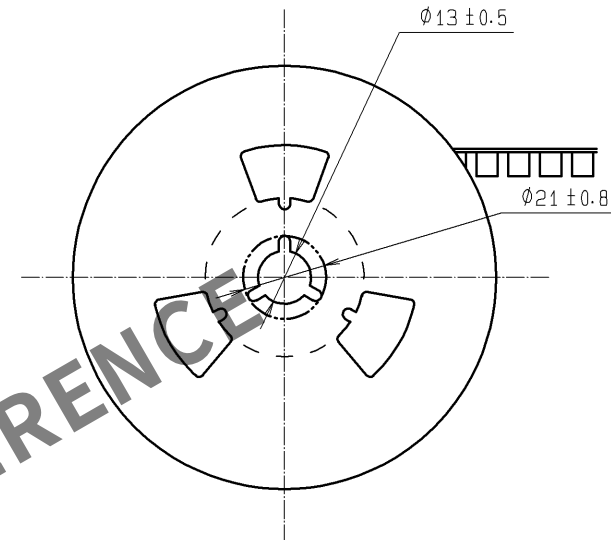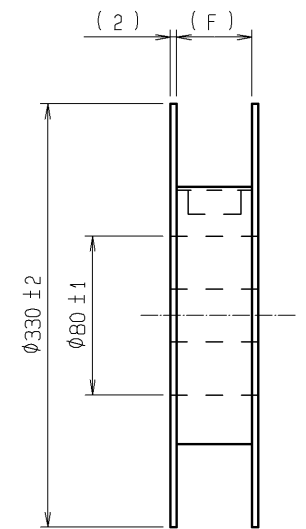

△ DIMENSION TABLE OF EMBOSSED CARRIER TAPE AND REEL.

PART No.	CODE No.	2	A	B	C	D	E	F
FX8C- 60S-SV(92)	CL578-0801-2-92	60	20	25	20.2	40.4	44	44.4
FX8C- 80S-SV(92)	CL578-0803-8-92	80	26	31	20.2	40.4	44	44.4
FX8C-100S-SV(92)	CL578-0805-3-92	100	32	37	26.2	52.4	56	56.4
FX8C-120S-SV(92)	CL578-0806-6-92	120	38	43	26.2	52.4	56	56.4
FX8C-140S-SV(92)	CL578-0807-9-92	140	44	49	34.2	68.4	72	72.4

NOTE 1 1 REEL : 1000 CONNECTORS
2 NUMBER OF CONTACTS

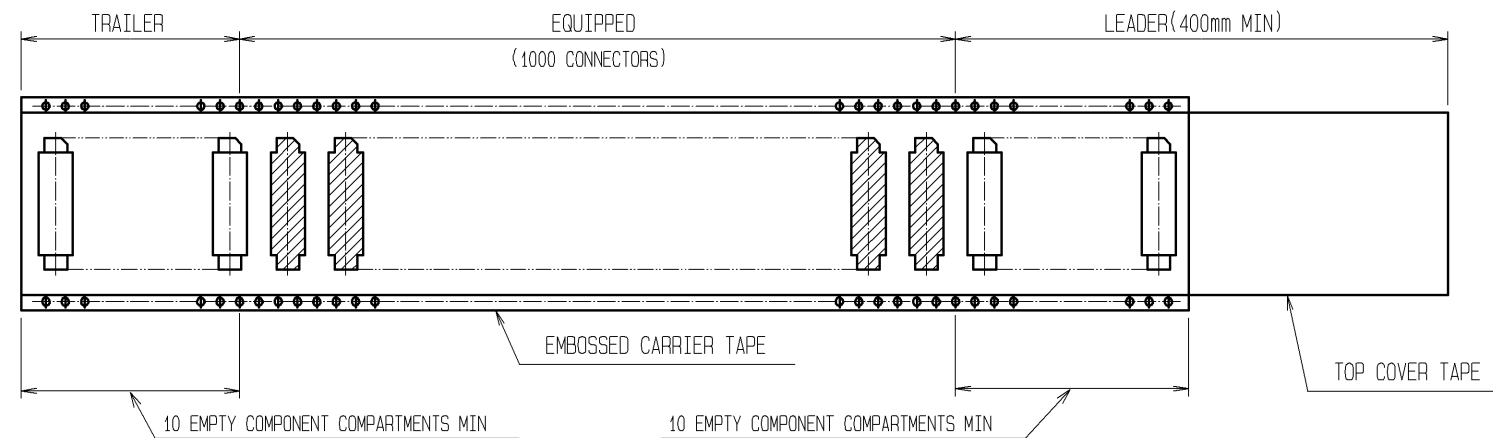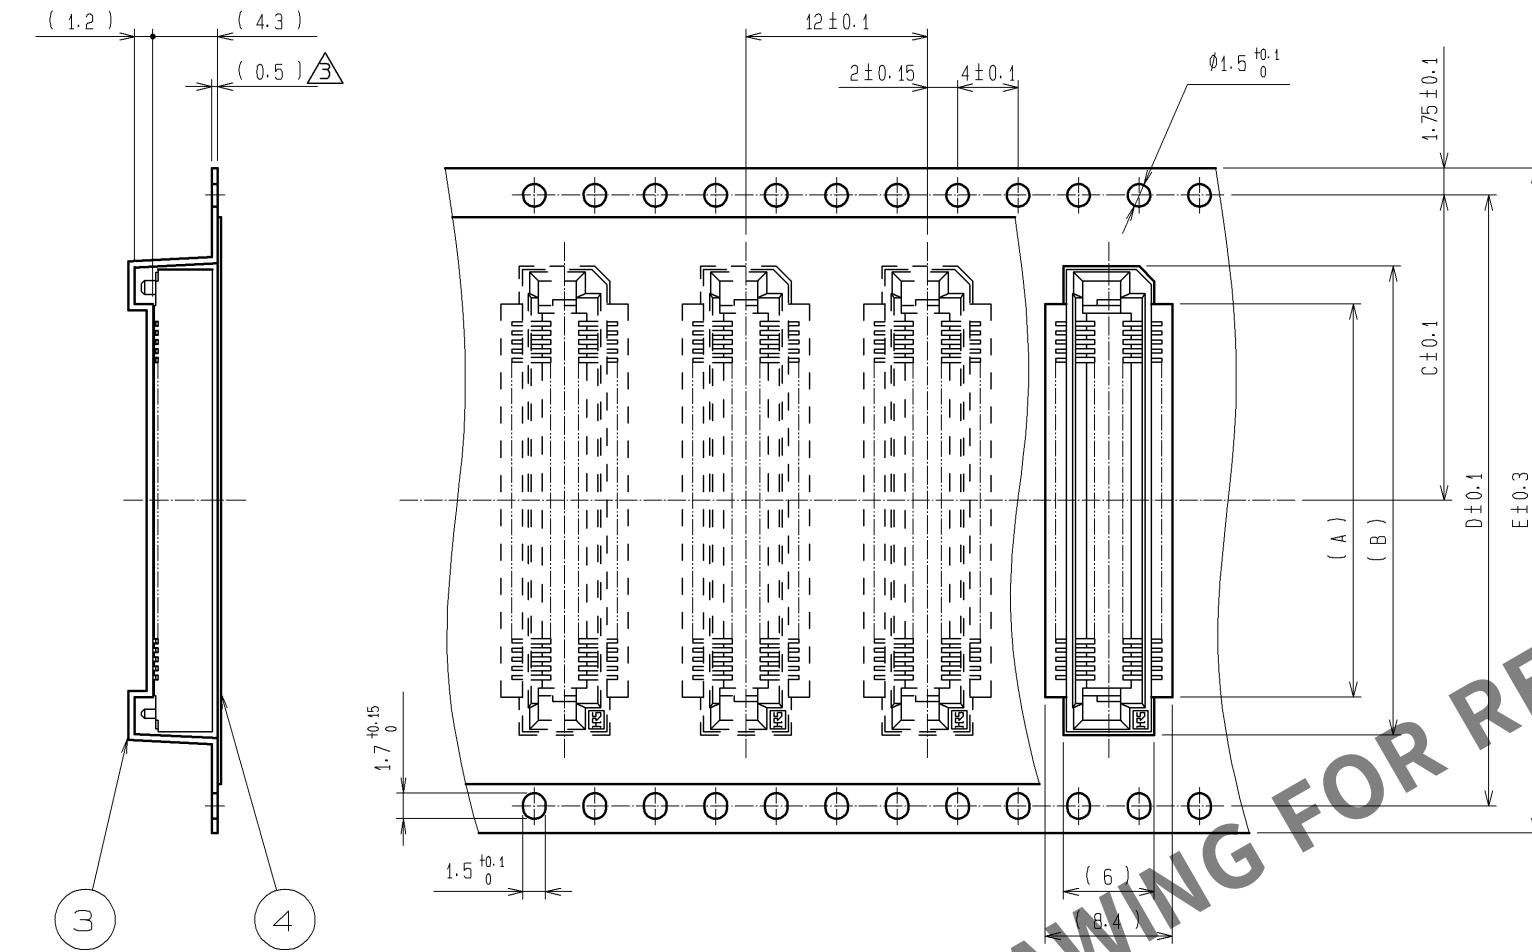

HRS

DRAWING NO.	EDC3-151022-22
PART NO.	FX8C- * S-SV(92)
CODE NO.	

3 2 2