


May.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

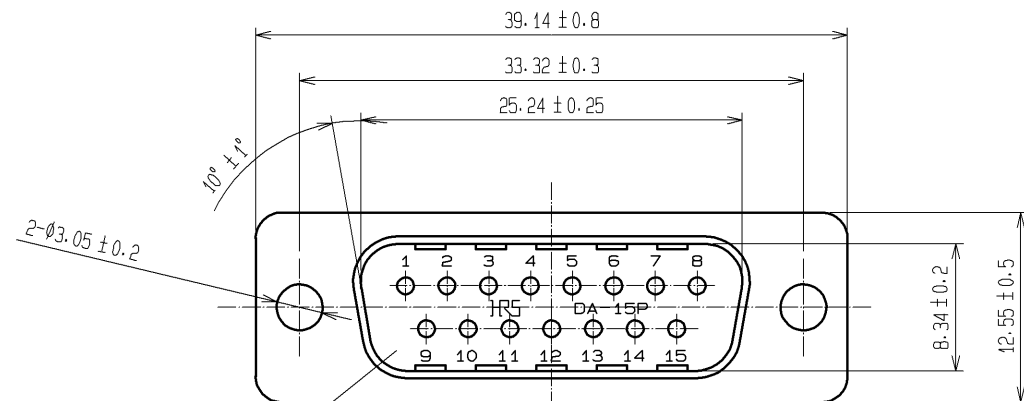

2


4

5

1

(SOLDER CUR Ø 1.1)


3

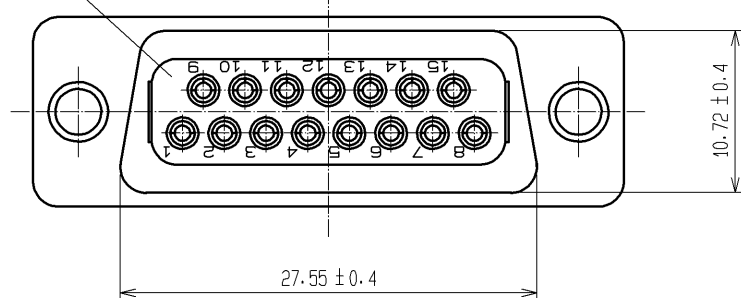


NOTE 1. SOLDERING SHALL BE DONE WITH SOLDERING BIT
OF 40W MAX WITHIN 4S.

2 CONTACT AREA: GOLD PLATING 0.2μm MIN
TERMINAL AREA: GOLD PLATING 0.03μm MIN
UNDER PLATING: NICKEL PLATING 2μm MIN

PANEL CUTOUT

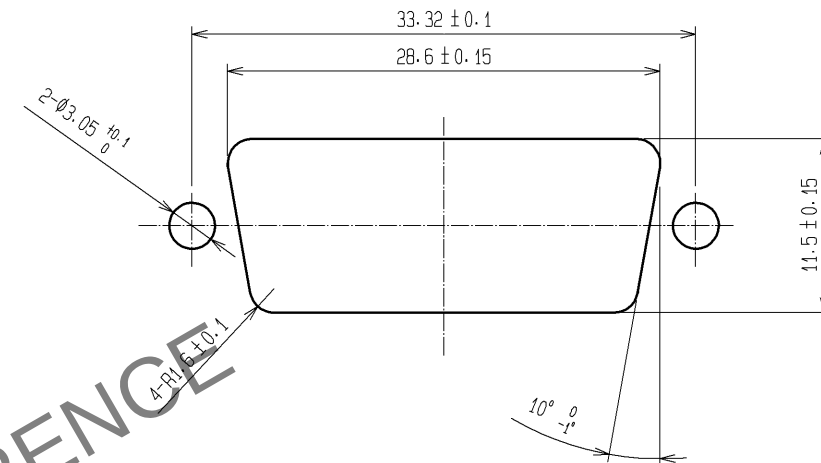

3	PBT	BLACK UL94V-0	5	STEEL	OVER PLATING : NICKEL 1μm min. UNDER PLATING : COPPER 5μm min.				
2	PBT	BLACK UL94V-0			4	STEEL	OVER PLATING : NICKEL 1μm min. UNDER PLATING : COPPER 5μm min.		
1	PHOSPHOR BRONZE	2							
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 2 : 1	△	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU		12.10.17		DRAWING NO.		EDC3-022423-01	
		CHECKED : EJ. WAKATSUKI		12.10.17		PART NO.		HDAB-15PF(05)	
		DESIGNED : MO. SHIMOYAMA		12.10.17		CODE NO.		CL211-0563-3-05	
		DRAWN : TY. ITO		12.10.16				△ 1/1	