

A

A

B

B

C

C

D

D




E

E


F

F

TO
Q1

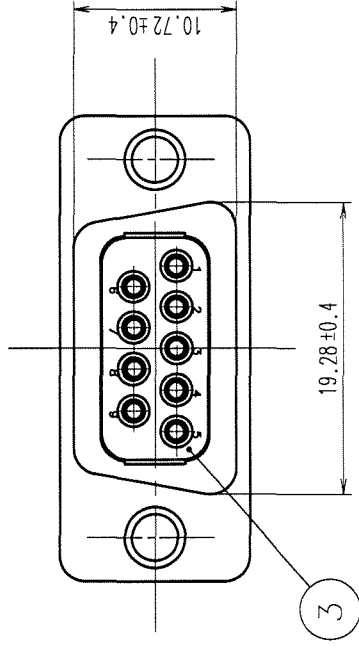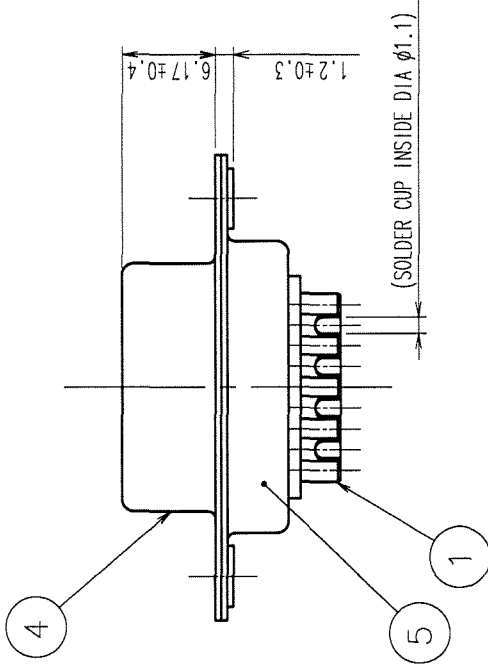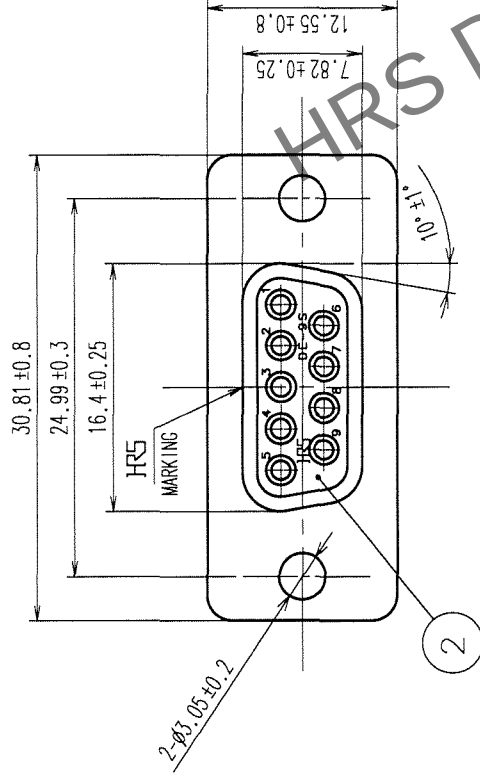

PANEL CUTOUT

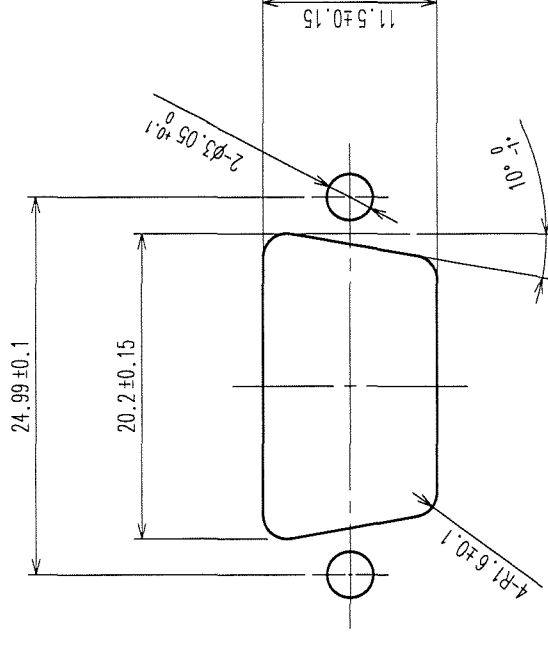

NOTE 1. USE SOLDERING IRON OF 40W MAX.
OPERATION PERIOD SHALL BE 4sec MAX.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

2	PBT	UL94V-0 (BLACK)	5	STEEL	NICKEL PLATING
1	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING 0.2 μm	4	STEEL	NICKEL PLATING
	MATERIAL	FINISH, REMARKS	3	PBT	UL94V-0 (BLACK)
NO.			NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
	M. Itano	J. Toriguchi	Y. Enami	X. Miura	
	06.02.13	06.02.13	06.02.13	06.02.13	

DRAWING NO.	PART NO.
EDC3-009502-01	HDEB-9S(05)
SCALE	CODE NO.
2 : 1	CL211-0233-9-05
UNITS	
mm	

HR5

HIROSE ELECTRIC CO., LTD

5

6

7

8

FORM NO. 228