
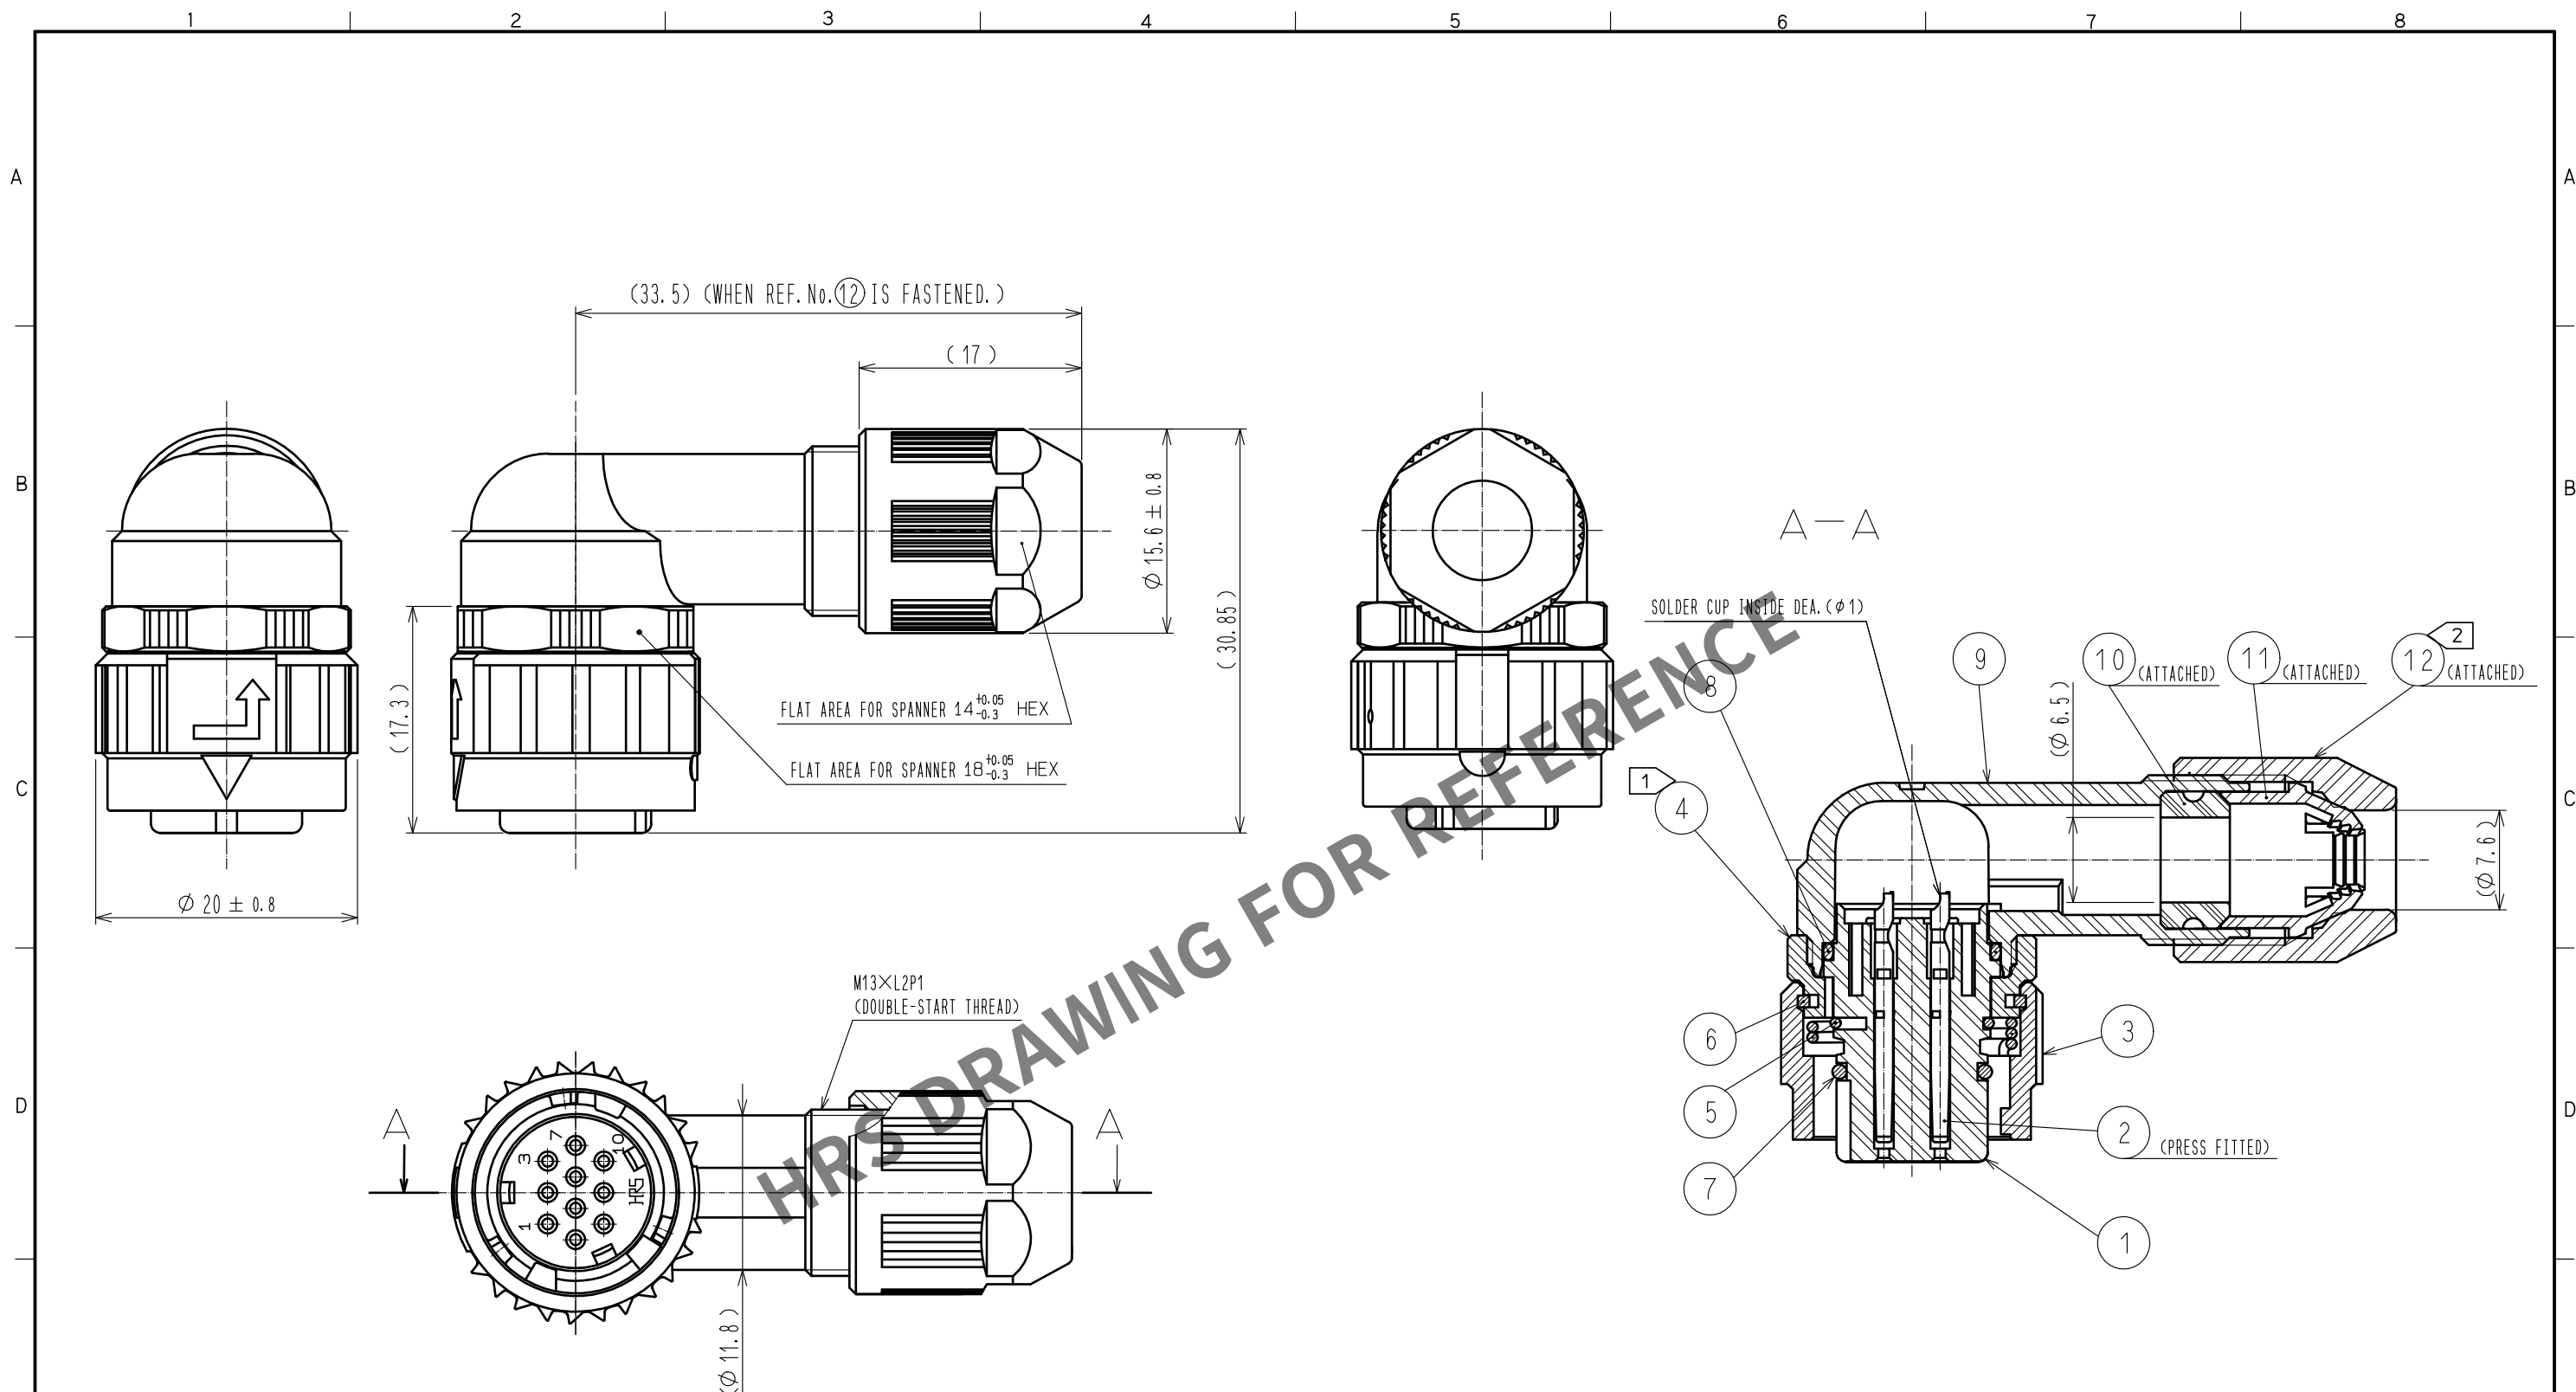




- NOTES
- 1 THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ④: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF NO. ④: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 - 2 THE RECOMMENDED TIGHTENING TORQUE OF REF NO. ⑫: 0.9 TO 1 N · m.
THE RECOMMENDED ADHESIVE AND PRIMER OF REF NO. ⑫: LOCTITE 243 AND LOCK PRIMER 7649 MADE BY HENKEL JAPAN LTD.
 - 3 ROTATION EXAMPLE ARE SHOWN FOR REF.NO. ①, ④, ⑨, AND ⑫.
 - 4 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFER, DEPENDING ON THE CABLE STRUCTURE.
PLEASE CONFIRM BEFORE THE USE.

5	STAINLESS STEEL		12	POLYPHENYLENE SULFIDE	(BLACK)	UL94V-0
4	ZINC ALLOY	NICKEL PLATING	11	POLYAMIDE	(WHITE)	UL94V-0
3	ZINC ALLOY	NICKEL PLATING	10	HYDROGENATION ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
2	PHOSPHOR BRONZE	CONTACT AREA :GOLD 0.2μm min. TERMINAL AREA:GOLD 0.03μm min. UNDER PLATING:NICKEL 2μm min.	9	POLYAMIDE	(BLACK)	UL94V-0
			8	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
			7	ACRYLONITRILE BUTADIENE RUBBER	(BLACK)	
1	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS	

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		2 : 1						

 HIROSE ELECTRIC CO., LTD.	APPROVED :HY. KOBAYASHI	18. 02. 26	DRAWING NO.	EDC-117789-31-00	
	CHECKED :HY. KOBAYASHI	18. 02. 26	PART NO.	HR08D-12WLPM-10S<31>	
	DESIGNED :DS. MATSUNE	18. 02. 24	CODE NO.	CL108-0276-0-31	
	DRAWN :AI. NISHIYAMA	18. 02. 22		 	