
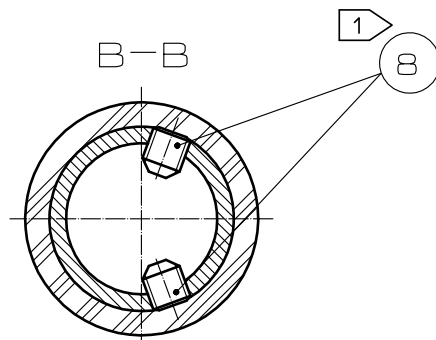
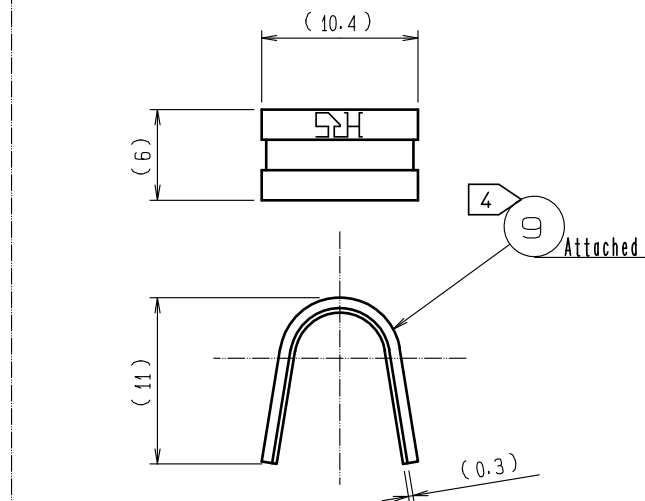


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

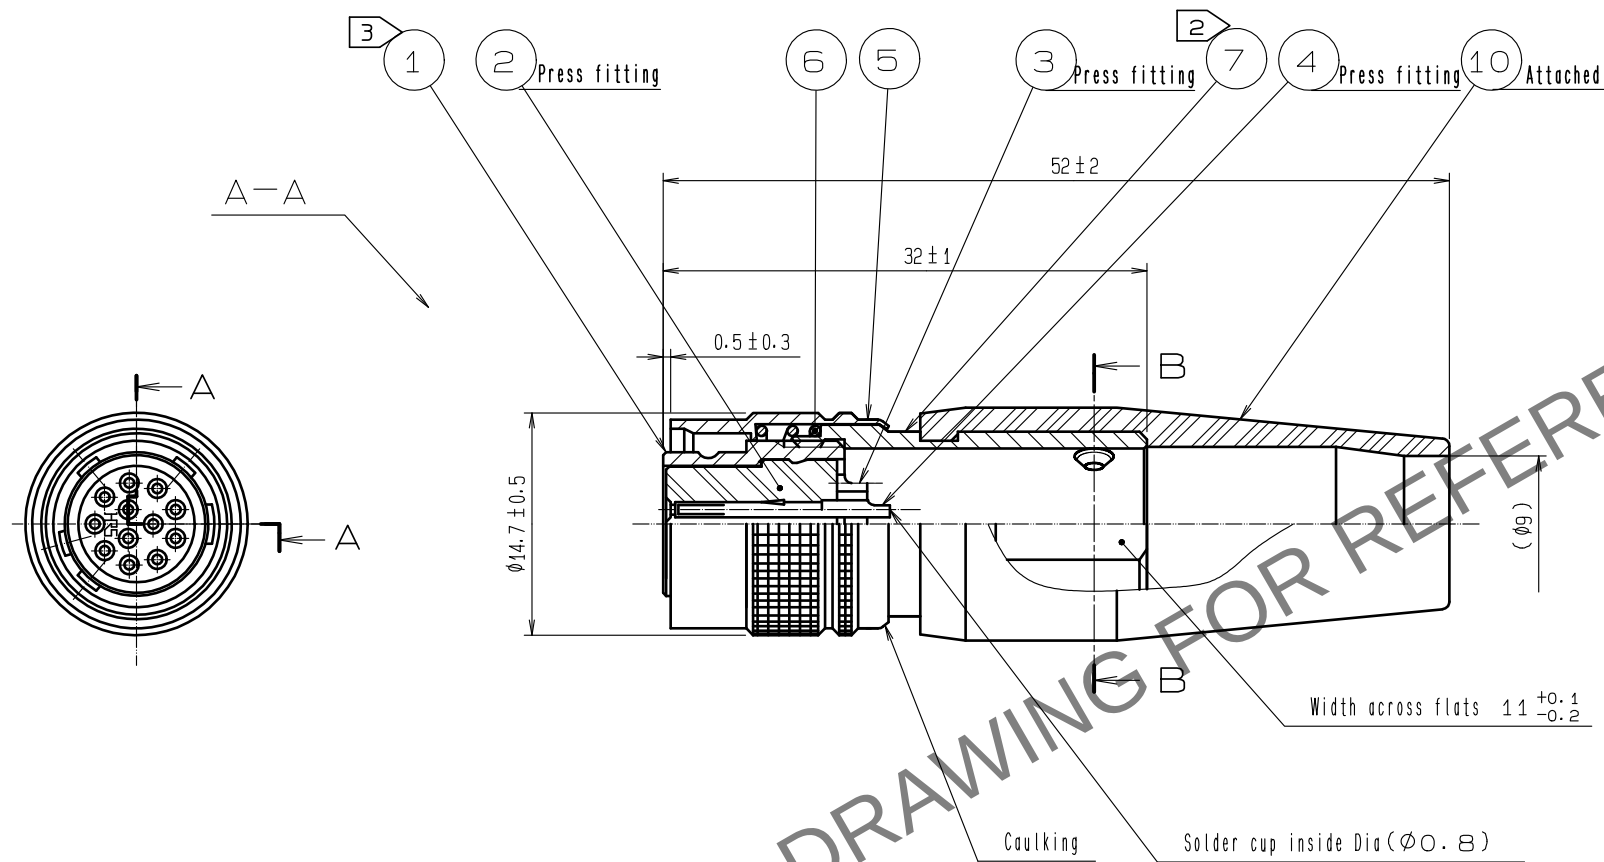

- Notes
- ① Across flats hexagon head of REF. NO. ⑧: 1.27
The concave portion with REF. NO. ⑨ clamped to the cable.
The recommended tightening torque, REF. NO. ⑧: 0.3 to 0.4 N·m.
 - ② The recommended tightening torque, REF. NO. ⑦: 2 to 2.5 N·m.
 - ③ LOCTITE 263, HENKEL JAPAN or equivalent applies to prevent REF. NO. ⑧ for loosening.
 - ④ LOCTITE 263, HENKEL JAPAN or equivalent applies to prevent REF. NO. ① for loosening.
 - ⑤ Applicable crimping tool of REF. NO. ⑨: HR10A-TC-03(CL150-0057-2)
 - ⑥ One example of the rotation of REF. NO. ⑦ to REF. NO. ① is shown.
 - ⑦ The cable pull and twisting strength and other characteristics may differ, depending on the cable structure. Please confirm before the use.
 - ⑧ The assembly this product applies to the manual ETAD-C0354-00.

5	Brass	Matte finish nickel plated	10	Chloroprene rubber	(Black)
4	Phosphor bronze	Silver plating 2μm min.	9	Brass	
3	Phosphor bronze	Silver plating 2μm min.	8	Steel	Nickel plating M2.6×0.45×3
2	Polyamide	(Black) UL94V-0	7	Brass	Nickel plating
1	Zinc alloy	Matte finish nickel plated	6	Steel	Nickel plating
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1		COUNT 3	DESCRIPTION OF REVISIONS DIS-C-00016953	DESIGNED HT. ZENBA	CHECKED EJ. KUNII	DATE 20240220
HIROSE ELECTRIC CO., LTD.			APPROVED	:EJ. KUNII	20150929	DRAWING NO. EDC-041594-73-73		
			CHECKED	:EJ. KUNII	20150929	PART NO. HR10A-10PD-12S(73)		
			DESIGNED	:TP. KOMATSU	20150929	CODE NO. CL0110-0449-3-73		
			DRAWN	:TP. KOMATSU	20150929			