




A
Detail of mounting guide

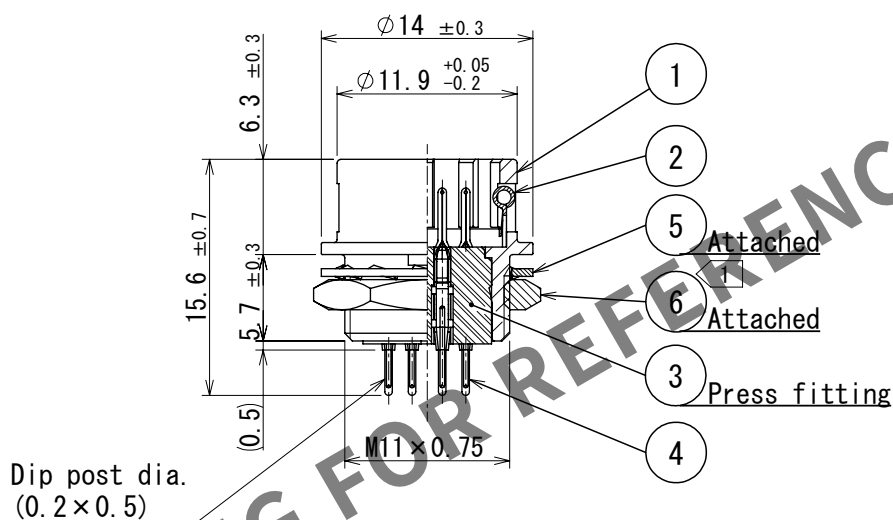


Panel cutout
t=0.7 to 2



PCB Layout

(Indicates the side of the surface to which dip posts are inserted.)

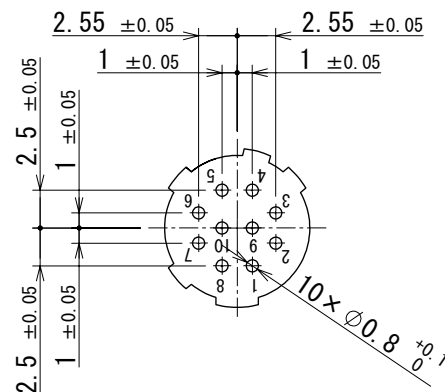

△ Note ① The recommended clamp torque of Ref.No. ⑥ to be 2 N · m.
Loctite 243, Henkel Japan or equivalent apply to prevent
Ref.No. ⑥ from loosening.

△ CAD change

3	Polybutylene terephthalate	(Black) UL94V-0	6	Brass	Nickel plating
2	Stainless steel		5	Phosphor bronze	Nickel plating
1	Zinc alloy	Matte finish nickel plated	4	Phosphor bronze	Silver plating 2μm min.
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00020578	DESIGNED TY. SUZUKI
CHECKED MO. SATOH		DATE 2005. 01. 05	DRAWING NO. EDC-022532-71-71		
DESIGNED YH. YAMADA		DATE 2005. 01. 05	PART NO. HR10A-10R-10PB (71)		
DRAWN YH. YAMADA		DATE 2005. 01. 05	CODE NO. CL0110-0414-9-71		
HRS		HIROSE ELECTRIC CO., LTD.	△ 1		