



1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		
1	DIS-C-000585	T.K	E.K	07.07.27							

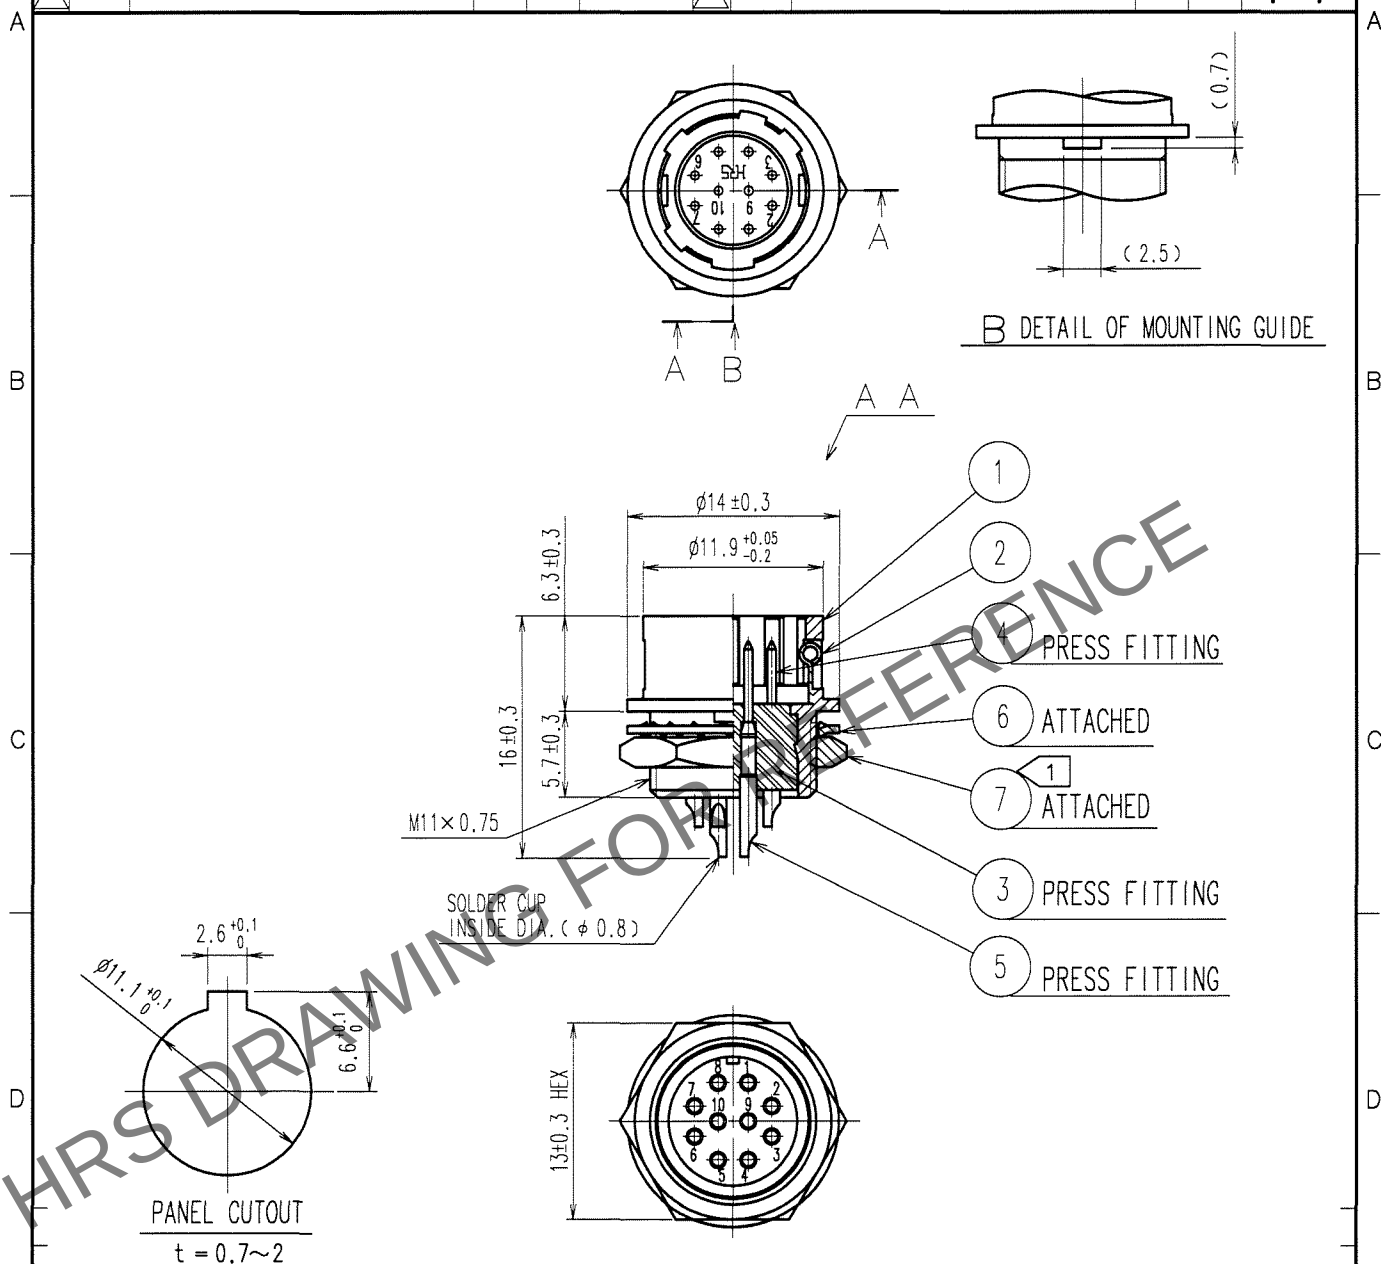

NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑦ TO BE 2 N·m.
 LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
 PREVENT REF. NO. ⑦ FROM LOOSENING.

			7	BRASS 	NICKEL PLATING
3	POLYAMIDE	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
2	STAINLESS STEEL		5	BRASS	OVER PLATING: GOLD 0.2μm min. UNDER PLATING: 2μm min.
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BRASS	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	M.SATO	TO.HORII	E.KUNII	M.SATO	
	'07 03 07	'07 03 07	'07 03 08	'07 03 08	

 SCALE 2 : 1 UNITS mm	DRAWING NO.	PART NO.
	EDC4-021369-74	HR10A-10R-10P(74)
	 HIROSE ELECTRIC CO., LTD.	CODE NO. CL110-0410-8-74