


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
R

NOTE ① THE RECOMMENDED CLAMP TORQUE, REF.NO.④ : 2 TO 2.5N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF.NO.④ FOR LOOSENING.

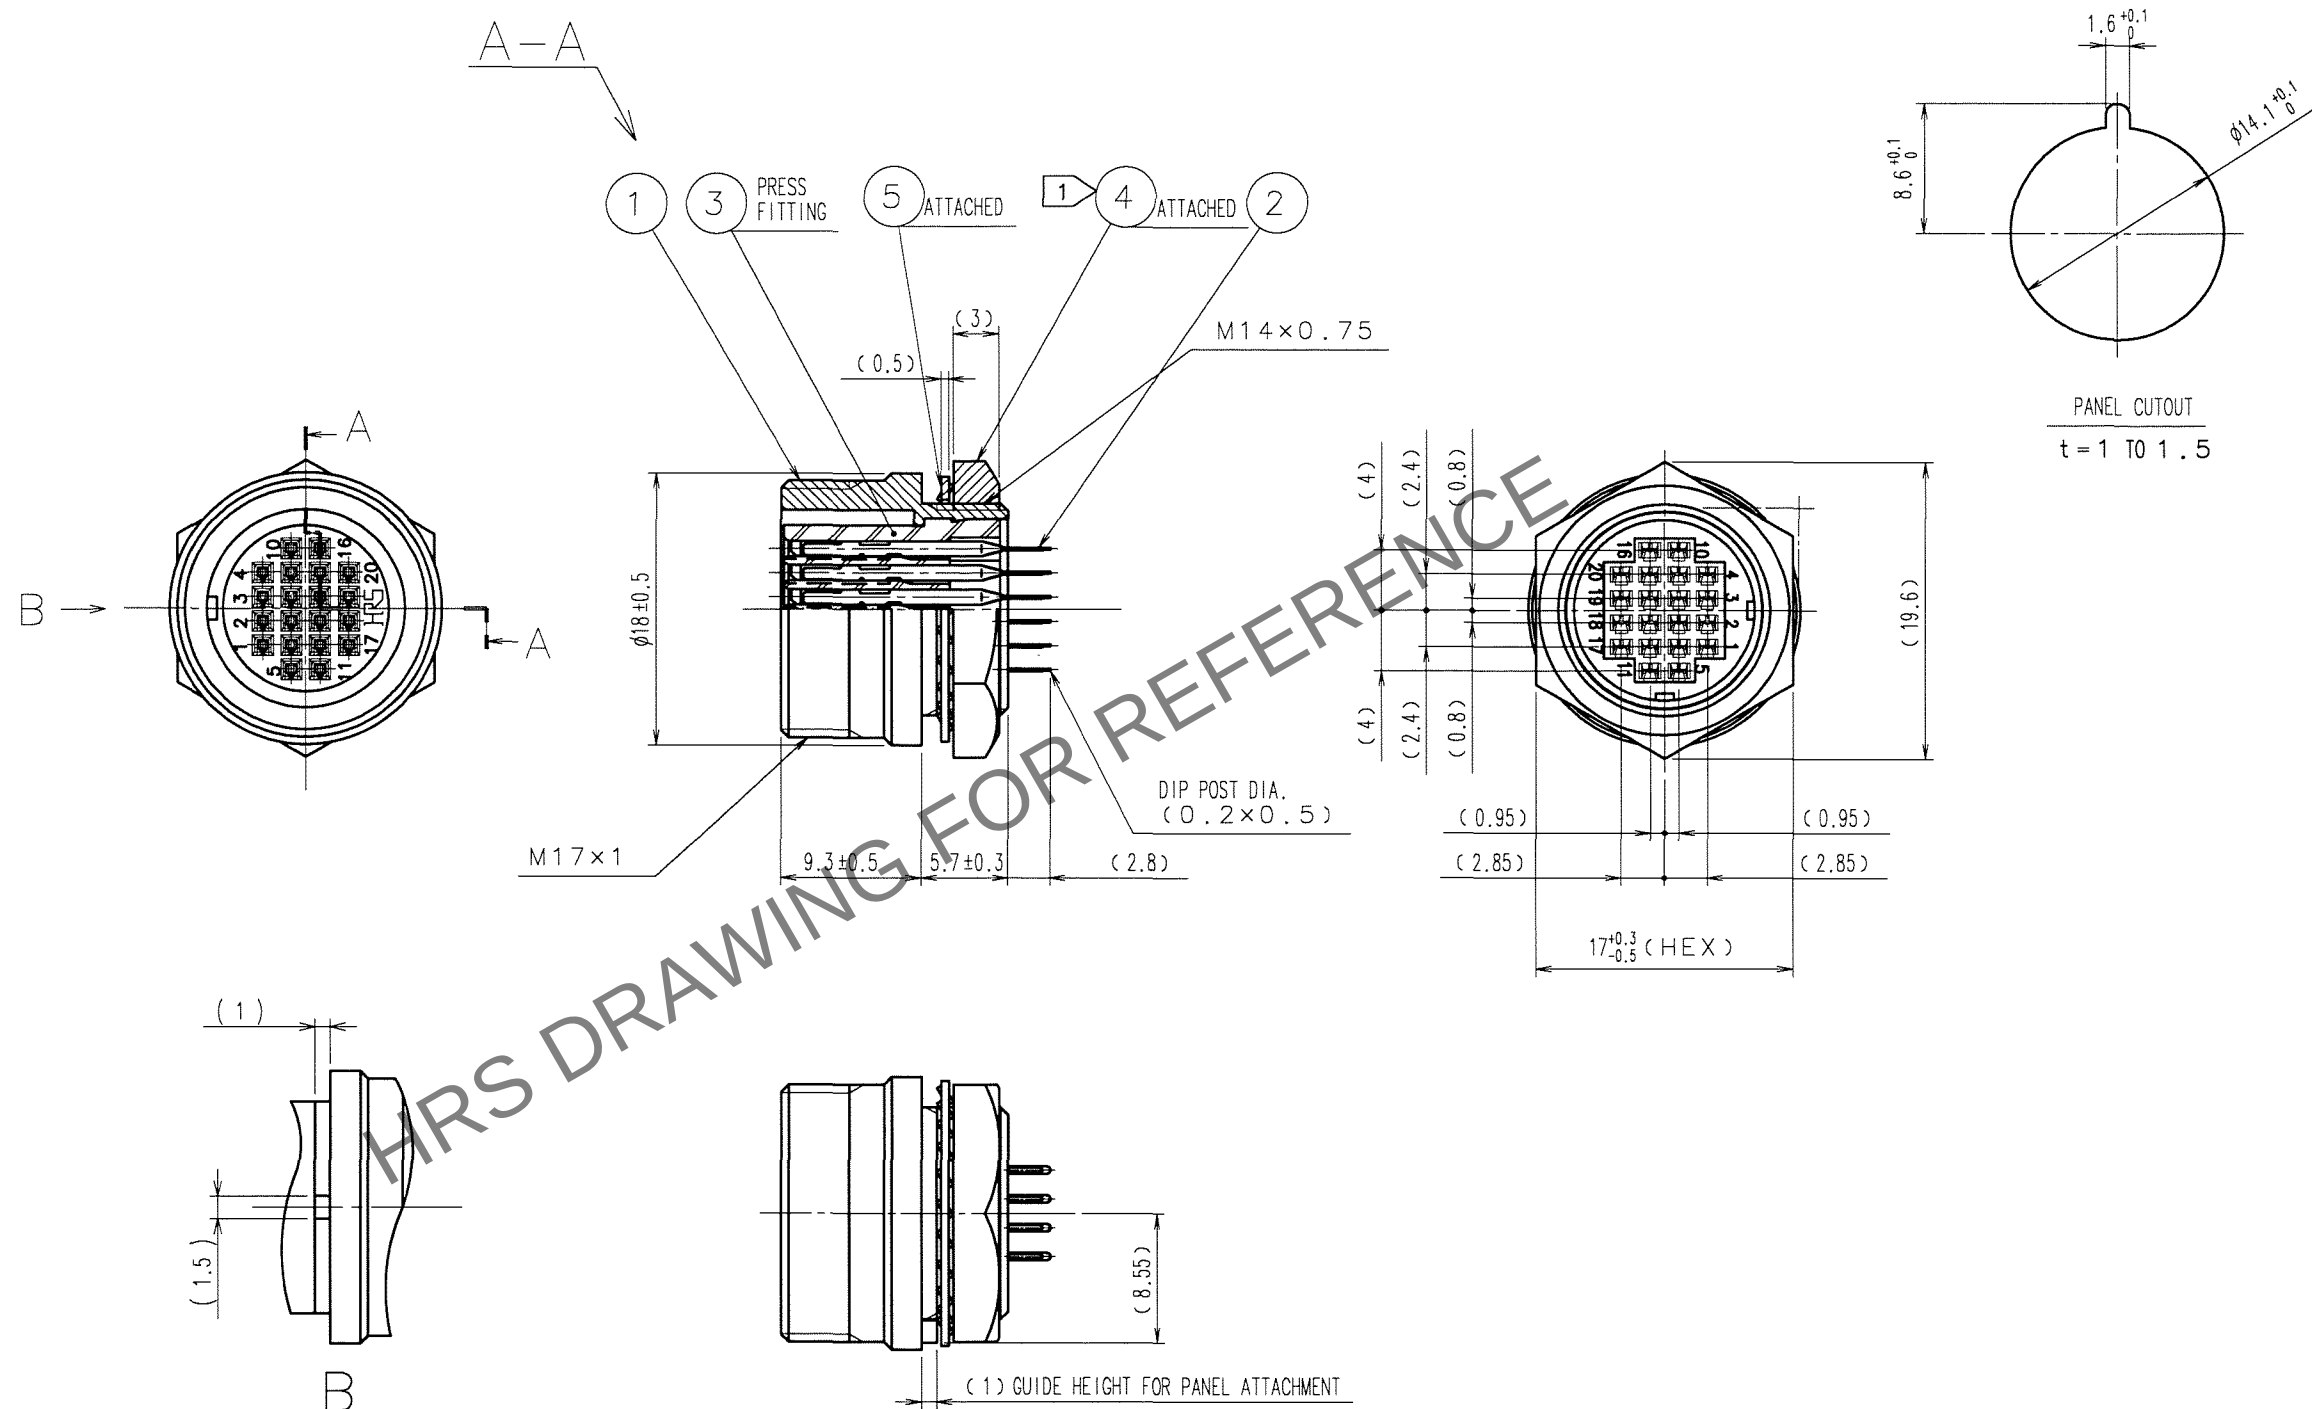

3	POLYBUTYLENE TEREPHTHALATE (BLACK) UL94V-0				
2	PHOSPHOR BRONZE SILVER PLATING 2μm min.	5	PHOSPHOR BRONZE NICKEL PLATING		
1	BRASS NICKEL PLATING	4	BRASS NICKEL PLATING		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED
		J. Morita	J. Morita	M. Sato	M. Sato
		07.03.20	07.03.20	07.03.22	07.03.22
SCALE	2 : 1	DRAWING NO.	EDC3-041487-73	PART NO.	HR10A-13TR-20SB(73)
UNITS	mm	HIROSE ELECTRIC CO., LTD.	CODE NO.	CL110-1014-6-73	1/1