


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
R

NOTES 1 APPLICABLE CRIMP CONTACT:HR12-SC-212(CL112-0408-9)
APPLICABLE WIRE:AWG#26 TO #30(COVERED WIRE MAX,OUTSIDE DIA.φ 1)
APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL):HR12-SC-TP(CL150-0050-3)
2 THE RECOMMENDED CLAMP TORQUE,REF.NO.③ :2 TO 2.5N·m.
LOCTITE 242,HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.NO.③FOR LOOSENING.

5					6					7					8				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△							..			△							..		
△							..			△							..		
△							..			△							..		

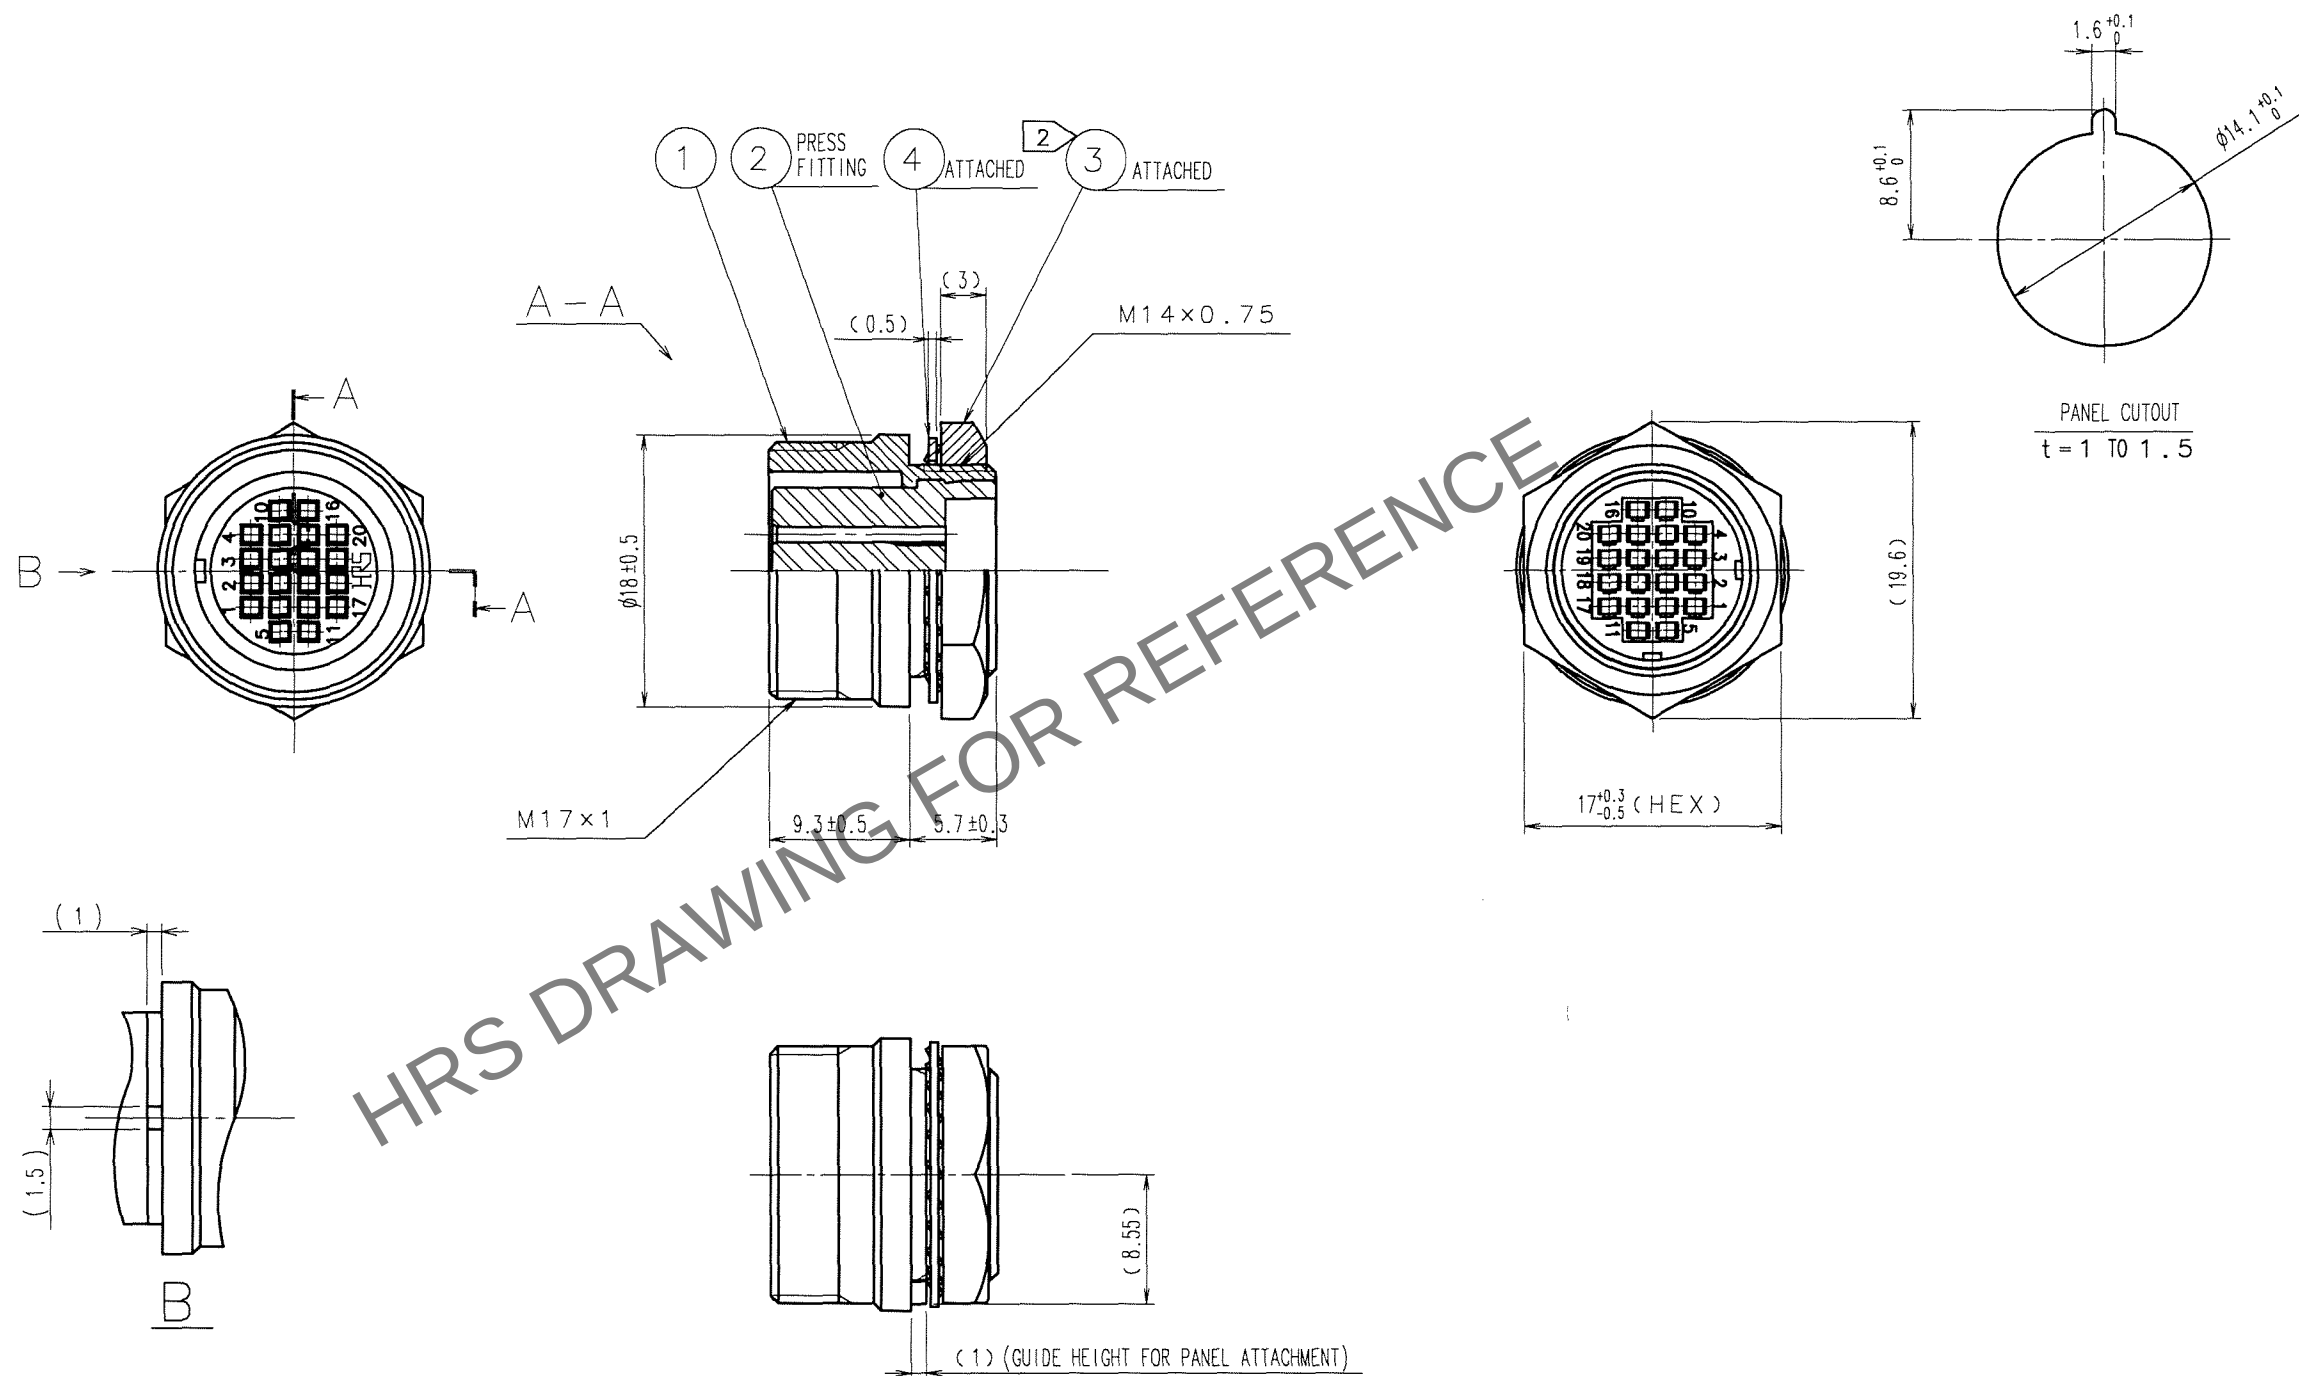

2	POLYBUTYLENE TEREPHTHALATE (BLACK)	UL94V-0	4	PHOSPHOR BRONZE	NICKEL PLATING
1	BRASS	NICKEL PLATING	3	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED
			M. Sato	T. Horie	M. Sato
			07.03.20	07.03.20	07.03.22
DRAWING NO. EDC3-027648-73			PART NO. HR10A-13TR-20SC(73)		
SCALE 2 : 1			CODE NO. CL110-1002-7-73		
UNITS mm			1/1		
HRS HIROSE ELECTRIC CO., LTD					