




	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△						△					. .
△						△					. .



PANEL CUTOUT
 $t = 0.7 \sim 2$

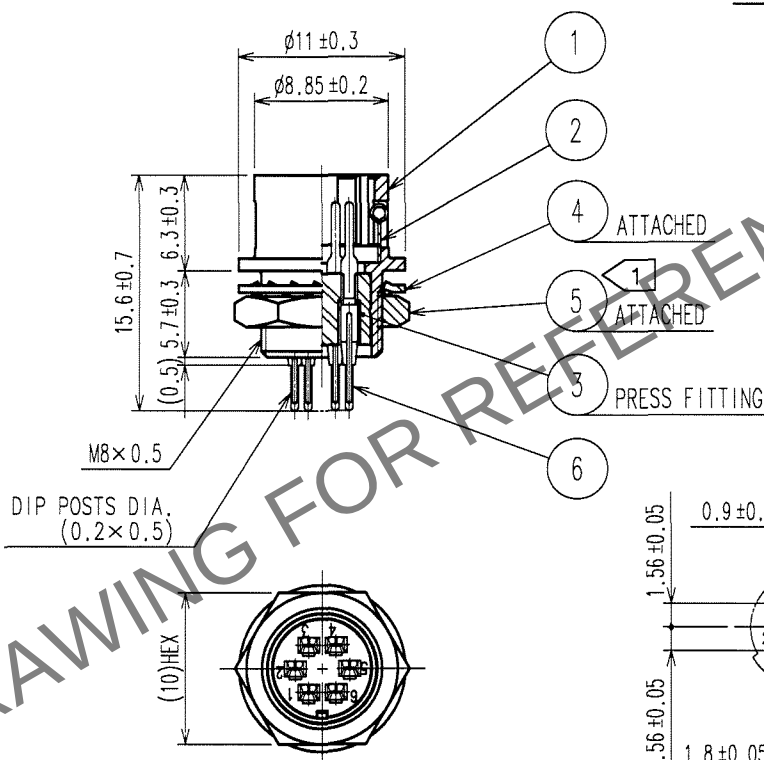


PCB LAYOUT

(INDICATES THE SIDE OF THE SURFACE
TO WHICH DIP POSTS ARE INSERTED.)

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑤ TO BE 1.5 N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑤ FROM LOOSENING.

3	PBT	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	SILVER PLATING 2μ m min.
2	STAINLESS STEEL		5	BRASS	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	NICKEL PLATING
NO.	MATERIAL	FINISH. REMARKS	NO.	MATERIAL	FINISH. REMARKS

NO.	DATE	REMARKS	NO.	DATE	REMARKS		
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
			S. Homatsu	D. Matsume	E. Kimii	M. Sato	
			05.11.17	05.11.18	05.11.22	05.11.24	

 SCALE 2 : 1 UNITS mm	DRAWING NO.	PART NO.	1 1
	EDC4-022530-73  HIROSE ELECTRIC CO.,LTD.	HR10A-7R-6PB(73) CODE NO. CL110-0317-2-73	