


1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS
△					△					△	
△					△					△	
△					△					△	

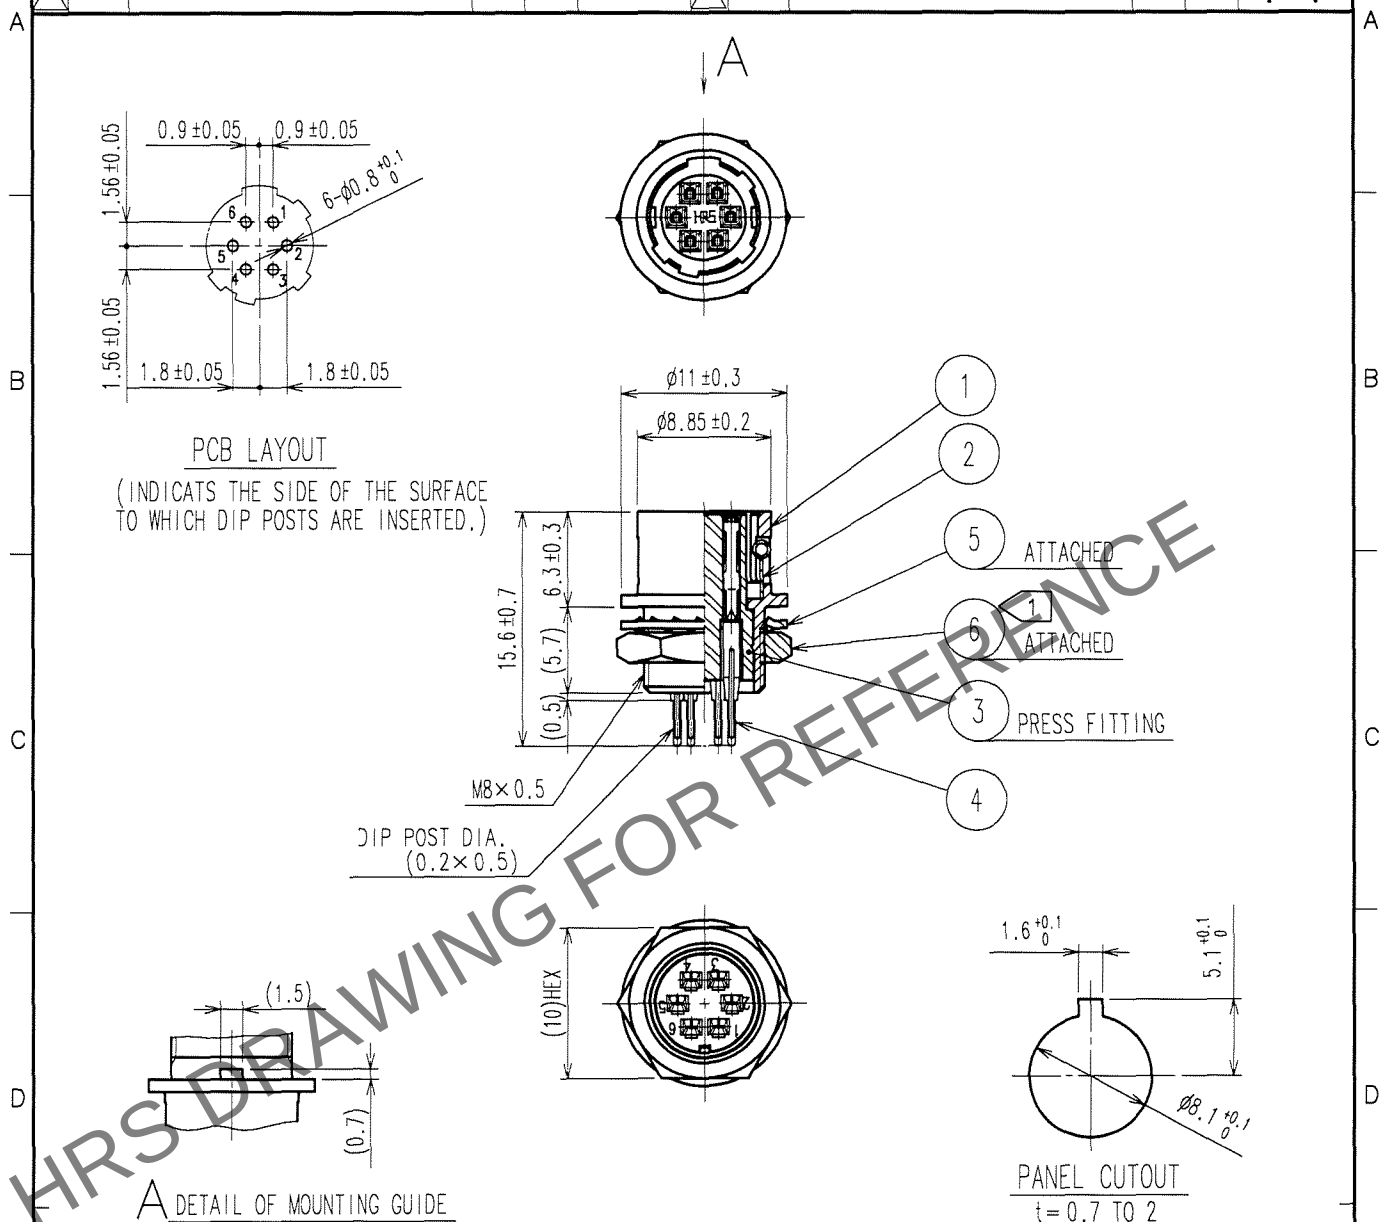

NOTE ① THE RECOMMENDED CLAMP TORQUE, REF. NO. ⑥ : 1.5N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑥ FOR LOOSENING.

3	POLYBUTYLENE TEREPHTHALATE	(BLACK)	UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL			5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKLE PLATED		4	PHOSPHOR BRONZE	OVER PLATING: GOLD 0.2μm min. UNDER PLATING: NICKLE 2μm min.
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	<i>M. Sato</i>	<i>T. Horii</i>	<i>E. Kuroi</i>	<i>M. Sato</i>	
	07.03.06	07.03.06	07.03.08	07.03.08	

DRAWING NO.	PART NO.
EDC4-022529-74	HR10A-7R-6SB(74)
UNITS	CODE NO.
mm	CL110-0316-0-74

HR

HIROSE ELECTRIC CO., LTD.