


1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△										△									
△										△									
△										△									

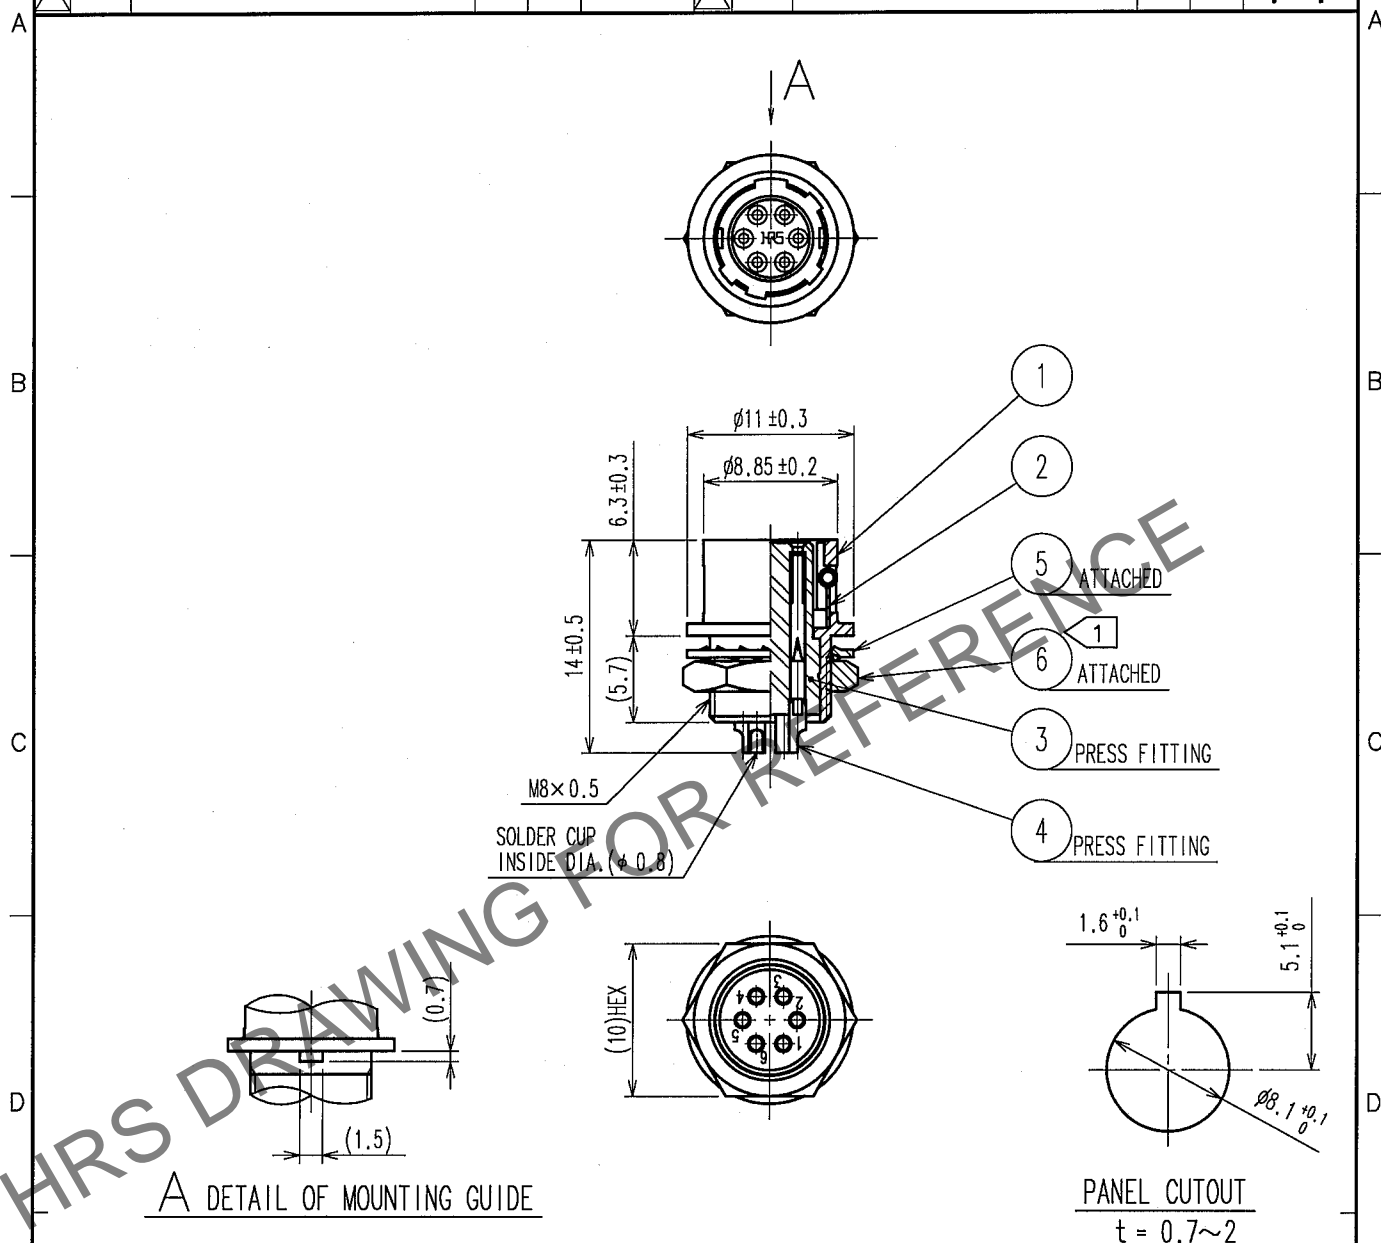

- NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 1.5 N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑥ FROM LOOSENING.
- 2 GOLD PLATING 0.2μm min.
NICKEL UNDER PLATING 2μm min.

3	POLYAMIDE	(BLACK) UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	2
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)
CL

DRAWN

DESIGNED

CHECKED

APPROVED


RELEASED

S. Komatsu
05.12.21

D. Matsume
05.12.21

E. Kuroi
05.12.22

M. Sato
05.12.22



DRAWING NO.

PART NO.

SCALE
2 : 1

EDC4-020540-74

HR10A-7R-6S(74)

UNITS
mm

HRS

HIROSE ELECTRIC CO., LTD.

CODE NO.

CL110-0307-9-74

1/1