


1					2			3			4		
	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		
△					. .	△					. .		
△						△					. .		
△						△					. .		

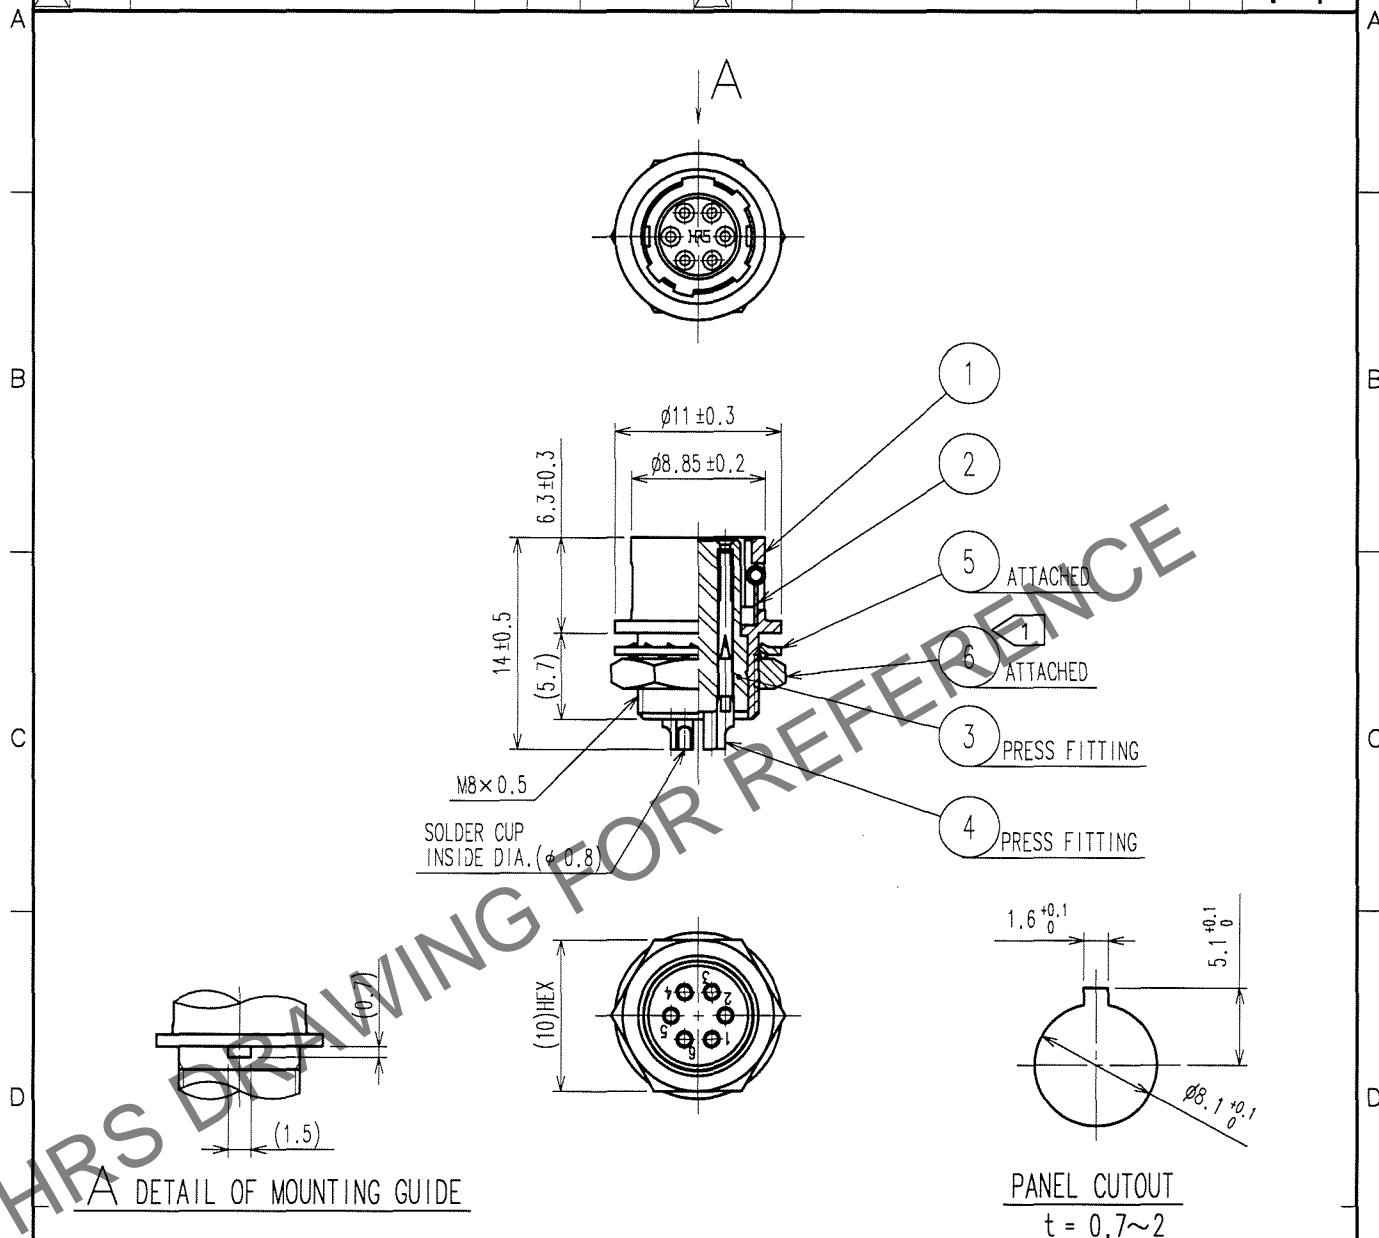

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 1.5 N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF. NO. ⑥ FROM LOOSENING.
2 GOLD PLATING : 0.2 μ m min.
NICKEL UNDER PLATING : 2 μ m min.

3	POLYAMIDE	(BLACK) UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	BLACK CHROME PLATING	4	PHOSPHOR BRONZE	2
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN T. Kamatsu 05.12.19	DESIGNED D. Matsume 05.12.19	CHECKED E. Kunii 05.12.19	APPROVED M. Sato 05.12.20	RELEASED
----------------------	---------------------------------	------------------------------------	---------------------------------	---------------------------------	----------

SCALE 2 : 1	DRAWING NO. EDC4-020540-77	PART NO. HR10A-7R-6S(77)
UNITS mm	HRS HIROSE ELECTRIC CO., LTD.	CODE NO. CL110-0307-9-77