


1		2			3		4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△ 1	DIS-C-000585	T.K	E.K	07.07.27	△				. .
△					△				. .
△					△				. .

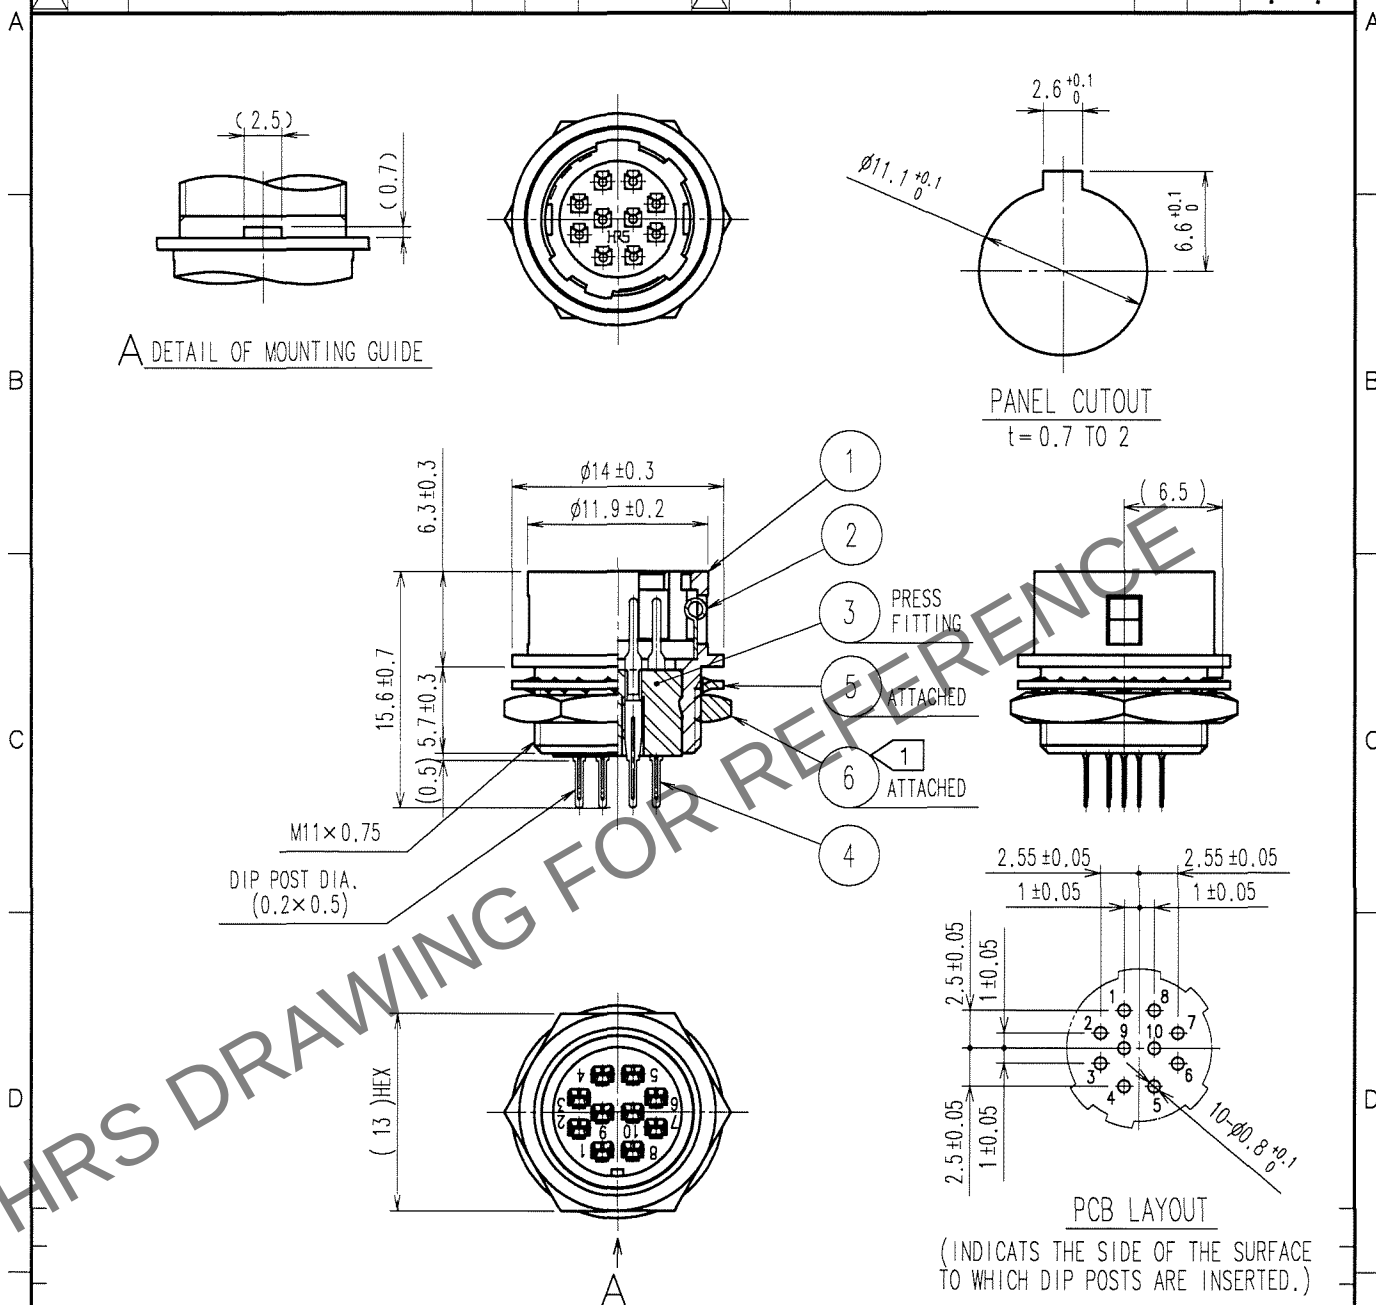

NOTE 1 THE RECOMMENDED CLAMP TORQUE, REF.NO. ⑥ : 2N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT REF.NO. ⑥ FOR LOOSENING.

3	POLYBUTYLENE TEREPHTHALATE (BLACK)	UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKLE PLATED	4	PHOSPHOR BRONZE	SILVER PLATING 2μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN M.SATO '07 04 11	DESIGNED T.HORII '07 04 11	CHECKED E.KUNII '07 04 11	APPROVED M.SATO '07 04 11	RELEASED
----------------------	--	------------------------------	----------------------------------	---------------------------------	---------------------------------	----------

SCALE 2 : 1	DRAWING NO. EDC4-042755-71		PART NO. HR10G-10R-10PB(71)		
	UNITS mm		CODE NO. CL110-1808-0-71		

HRS

HIROSE ELECTRIC CO., LTD.