


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
R

A
B
C
D
E
F

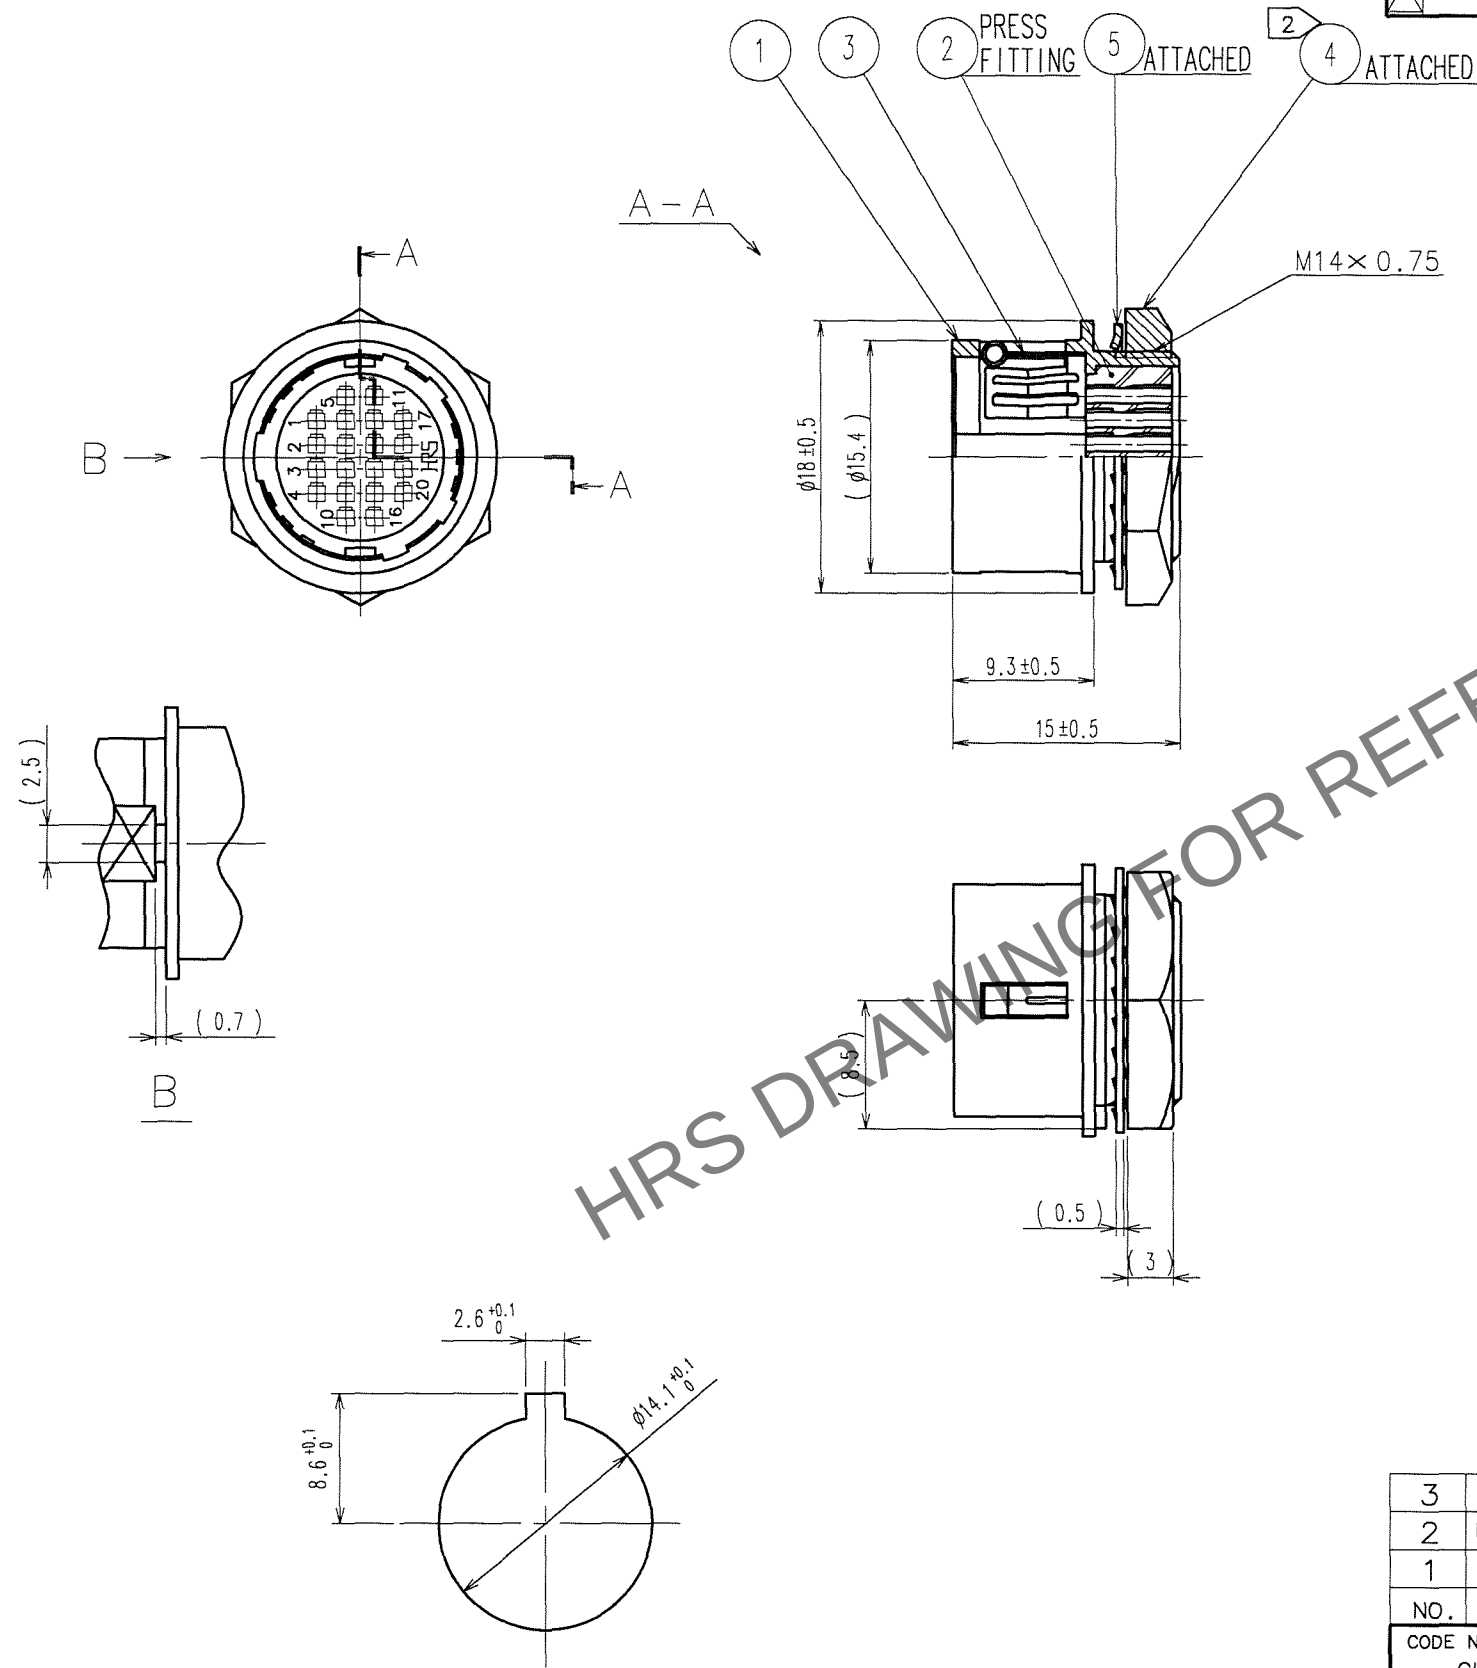

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

A
B
C
D
E
F

NOTES 1 APPLICABLE CRIMP CONTACT:HR10-PC-212(CL110-0514-3)
APPLICABLE WIRE:AWG#26 TO #30(COVERED WIRE MAX,OUTSIDE DIA.φ 1)
APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL):RP6-SC-TP(CL150-0039-0)
2 THE RECOMMENDED CLAMP TORQUE OF REF. NO. 4 TO BE 2 TO 2.5N·m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. 4 FROM LOOSENING.

3	STAINLESS STEEL				
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED
			M. Sato	T. Nishii	E. Kunita
			07.04.11	07.04.11	07.04.11
					U. Sato
					..
DRAWING NO. EDC3-042735-73			PART NO. HR10G-13R-20PC(73)		
SCALE 2 : 1			CODE NO. CL110-1712-2-73		
UNITS mm			1/1		
HRS			HIROSE ELECTRIC CO., LTD		