




1			2			3			4		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△						△					
△						△					
△						△					

A DETAIL OF MOUNTING GUIDE



PANEL CUTOUT
t = 0.7 TO 2

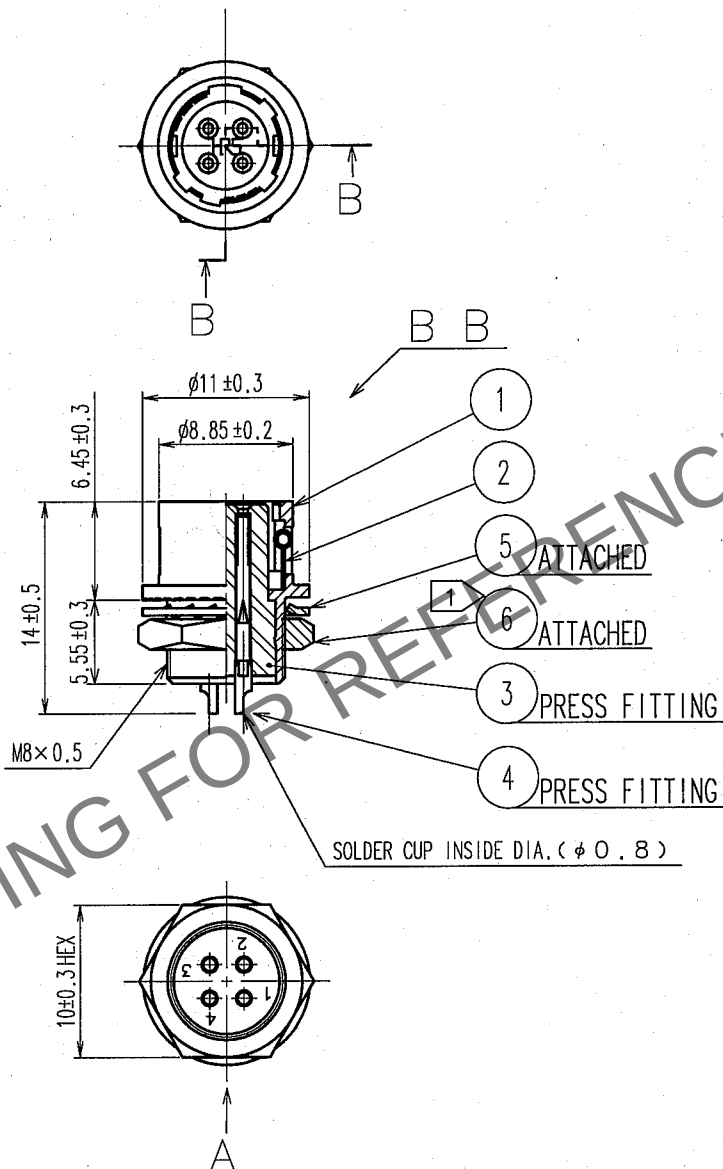

- NOTE ① THE RECOMMENDED CLAMP TORQUE OF REF.NO ⑥ : 1.5N · m.
LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT
REF.NO. ⑥ FROM LOOSENING.
- ② OVER PLATING : GOLD 0.2μ m min.
UNDER PLATING: NICKEL 2μ m min.

3	POLYAMIDE	(BLACK) UL94V-0	6	BRASS	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	PHOSPHOR BRONZE	②
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)
CL

DRAWN

DESIGNED

CHECKED

APPROVED

RELEASED

J. Komatsu

J. Komatsu

E. Kunita


M. Sato

'06.09.14

'06.09.14

'06.09.14

'06.09.15



DRAWING NO.

EDC4-042704-74

PART NO.

HR10G-7R-4S(74)

CODE NO.

CL110-1601-1-74

HRS

HIROSE ELECTRIC CO., LTD.

1

1