



Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1					2					3					4				
COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE			COUNT	DESCRIPTION OF REVISIONS				BY	CHKD	DATE		
△										△									
△										△									
△										△									

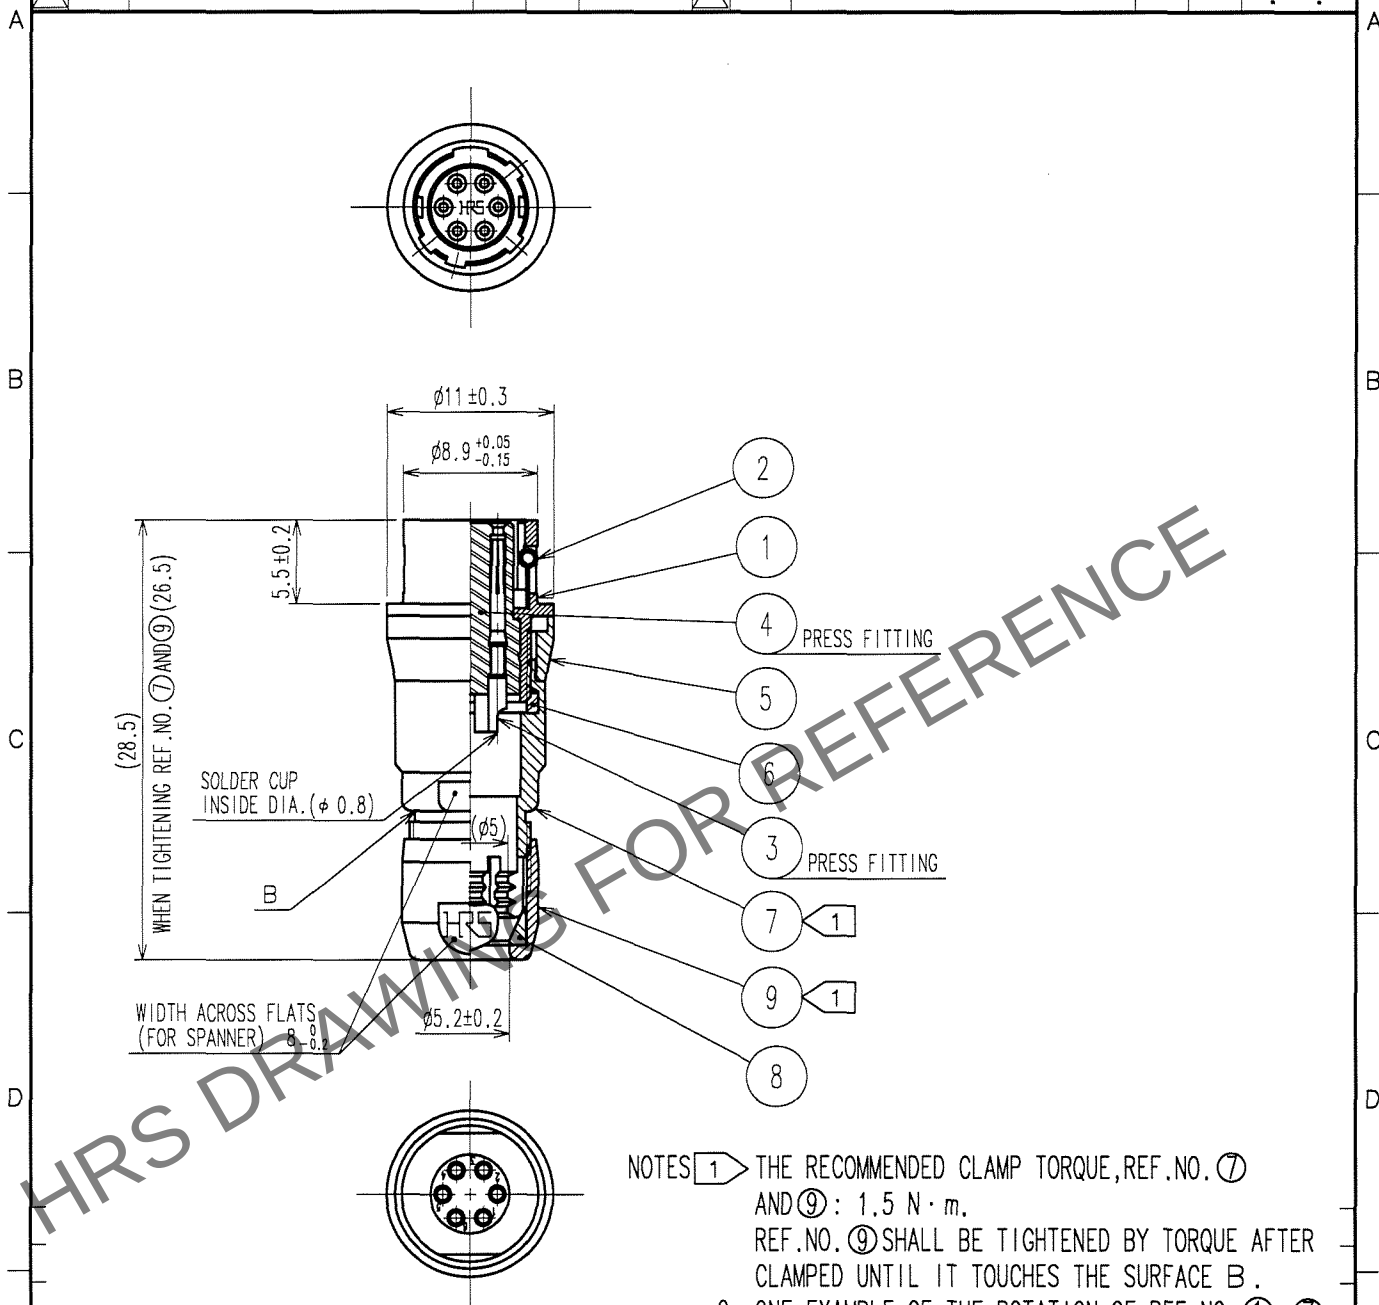

- NOTES 1 THE RECOMMENDED CLAMP TORQUE, REF. NO. ① AND ⑨: $1.5 \text{ N} \cdot \text{m}$.
REF. NO. ⑨ SHALL BE TIGHTENED BY TORQUE AFTER CLAMPED UNTIL IT TOUCHES THE SURFACE B.
2 ONE EXAMPLE OF THE ROTATION OF REF. NO. ①, ⑦ AND ⑨ ARE SHOWN.

4	POLYAMIDE	(BLUE)	9	BRASS	MATTE FINISH NICKEL PLATED
3	BERYLLIUM COPPER	GOLD PLATING $0.2 \mu \text{m min.}$ NICKEL UNDER PLATING $2 \mu \text{m min.}$	8	POLYAMIDE	
2	STAINLESS STEEL		7	BRASS	MATTE FINISH NICKEL PLATED
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	6	POLYAMIDE	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL			DRAWN	DESIGNED	CHECKED
			APPROVED	RELEASED	
			<i>D. Matsume</i> 05.11.19	<i>D. Matsume</i> 05.11.19	<i>E. Kurii</i> 05.11.22
				<i>M. Sato</i> 05.11.24	
DRAWING NO. EDC4-007764-73			PART NO. HR10-7J-6S(73)		
CODE NO. CL110-0029-8-73			1 1		



HRS

HIROSE ELECTRIC CO., LTD.

CL110-0029-8-73

FORM NO. 228