
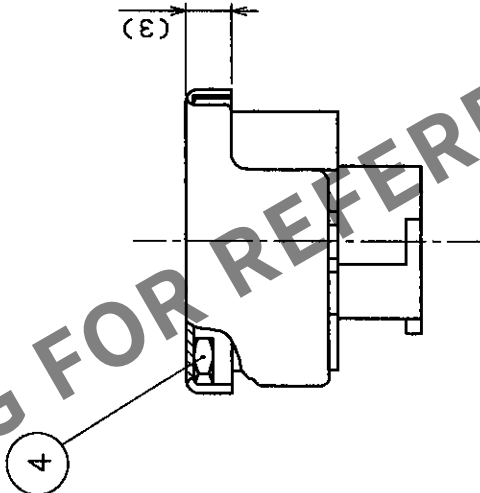
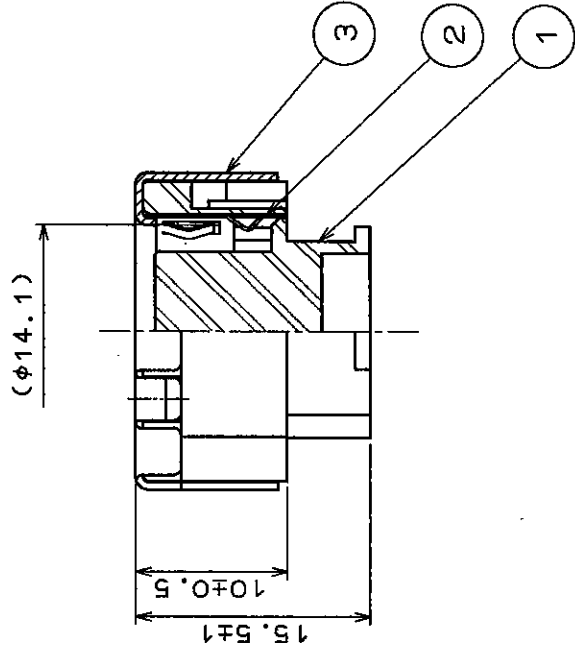


COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS		BY	CHKD	DATE
△	△					..	△	△					..
△	△					..	△	△					..
△	△					..	△	△					..

Note 1 Applicable Crimp Contact:HR12-SC-212,112
(Applicable Wire:AWG#26~#30,
Jacket Dia.φ1 Max)

2 Applicable Crimp Contact Extraction Tool
:HR12-SC-TP

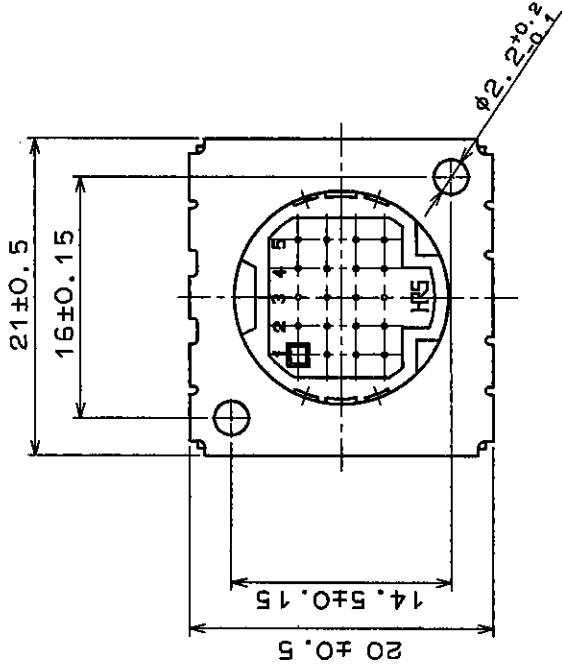

HRS DRAWING FOR REFERENCE

2	Phosphor bronze	Tin plated	4	Brass	JIS B 1181 Hexagon Nut M2x0.4, No. 3
1	PBT	(Black)	3	Brass	Tin plated
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD)					
		DRAWN	DESIGNED	CHECKED	APPROVED
		H. Kishi	H. Kishi		M. Yoshida
		95.5.15	95.5.15		95.5.19
		RELEASED			
DRAWING NO.		PART NO.			
EDC3-028887		HR12-14RA-20SC			
SCALE		CODE NO.			
1 : 1		CL112-1504-8			
UNITS		1			
mm					
HRS HIROSE ELECTRIC CO., LTD.					