



Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

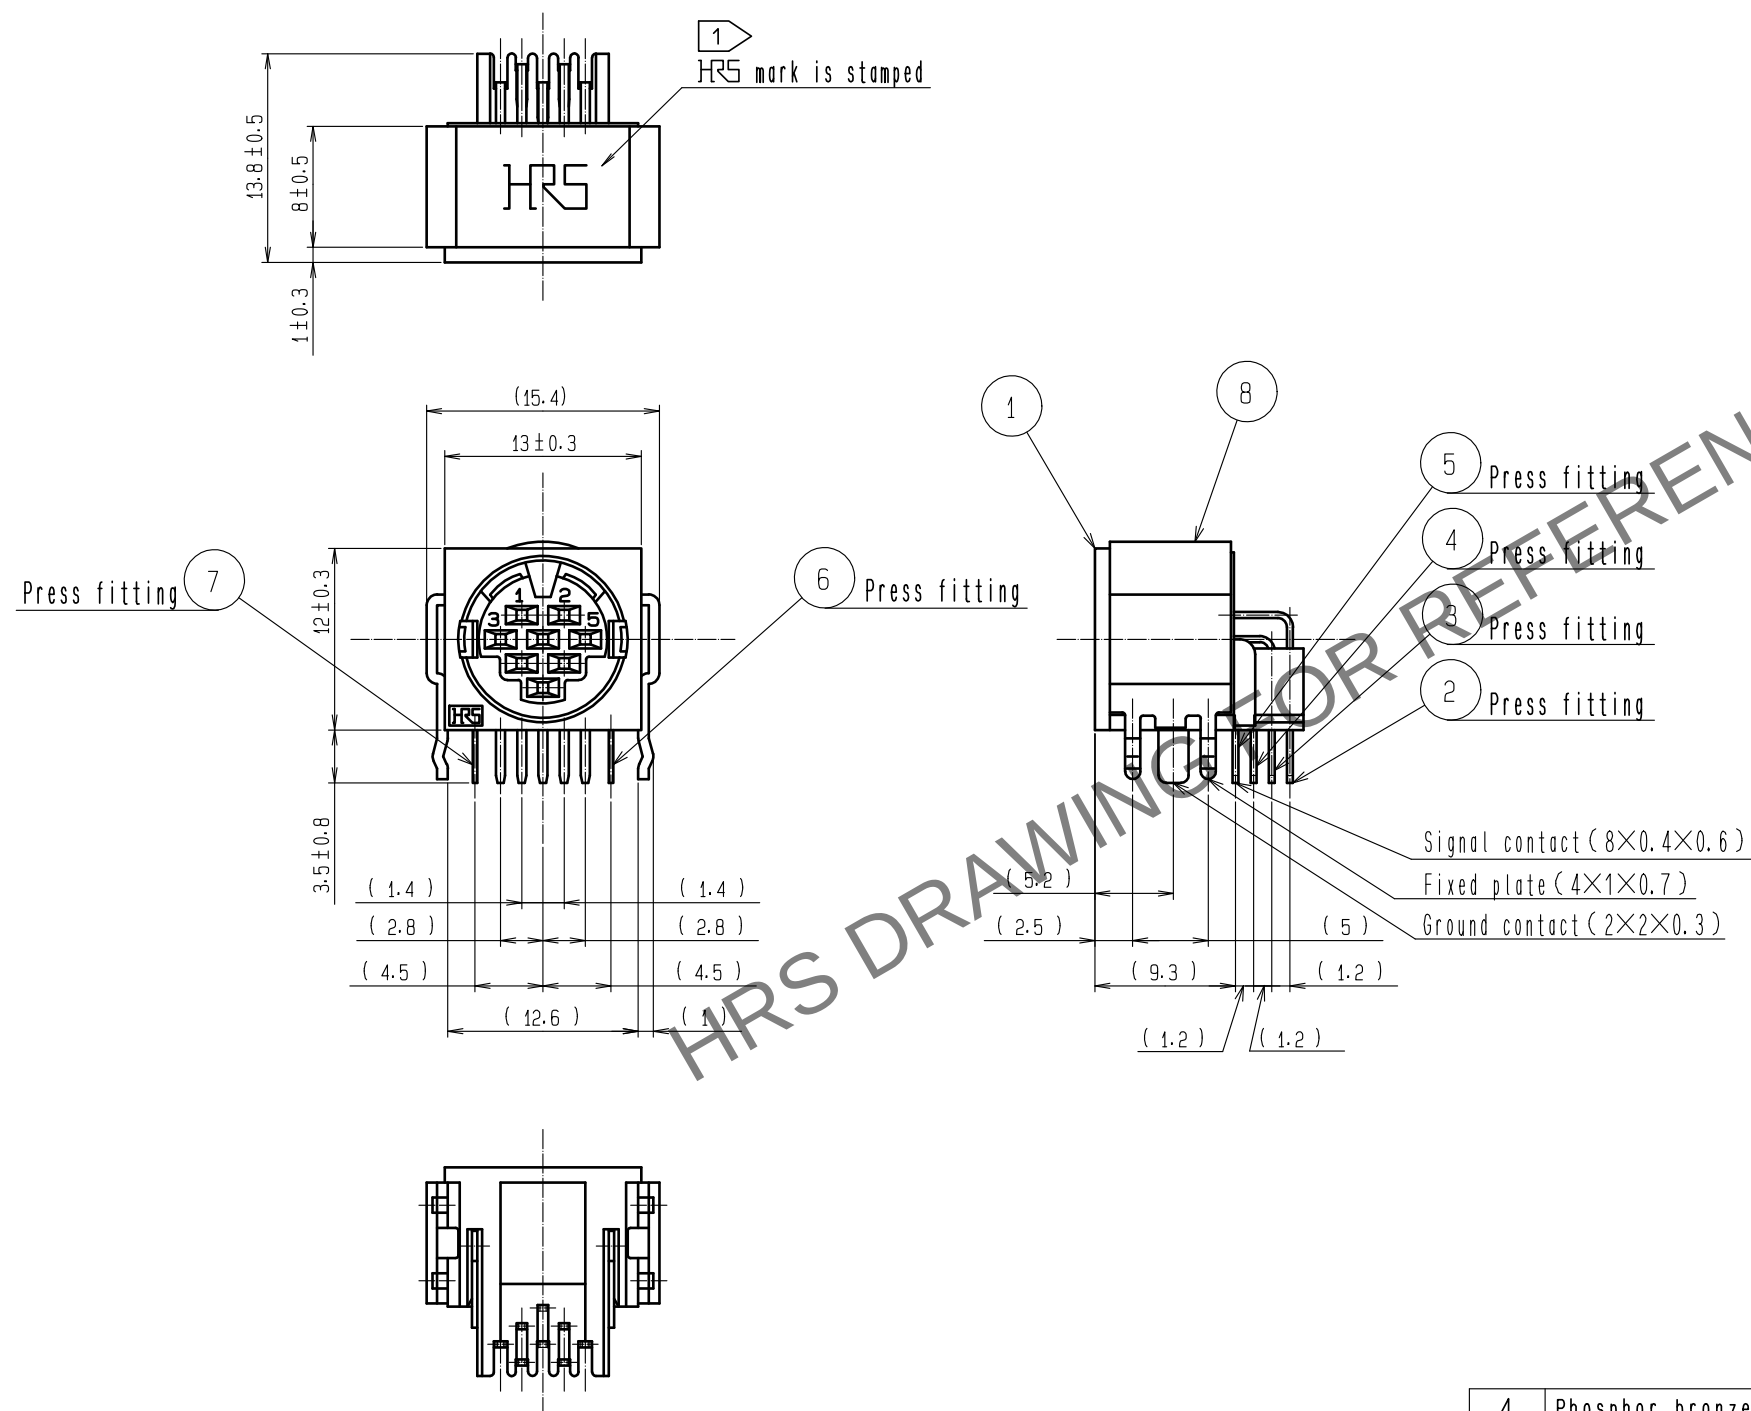

Recommended PC board hole pattern
(Applicable board thickness t=1~2)

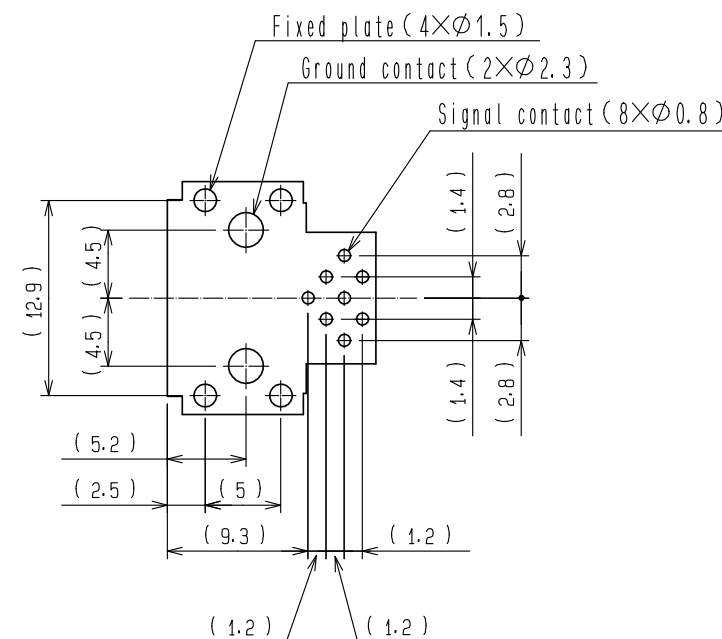

*) It shows the mounting face.

Note) 1 HRS mark direction example of Ref. No. ⑧ is SHOWN.

4	Phosphor bronze	Under plating:Nickel plating Surface:tin plating	8	Brass	Tin plating
3	Phosphor bronze	Under plating:Nickel plating Surface:tin plating	7	Phosphor bronze	Tin plating
2	Phosphor bronze	Under plating:Nickel plating Surface:tin plating	6	Phosphor bronze	Tin plating
1	Polybutylene terephthalate	(Black) UL94V-0	5	Phosphor bronze	Under plating:Nickel plating Surface:tin plating
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
APPROVED :EJ. KUNII	15.10.02	DRAWING NO.	EDC-029457-71-00	CHECKED	DATE
CHECKED :EJ. KUNII	15.10.02	PART NO.	HR12-10RC-8SDL(71)	CODE NO.	
DESIGNED :SJ. SHIMIZU	15.10.01				
DRAWN :SJ. SHIMIZU	15.10.01				