


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

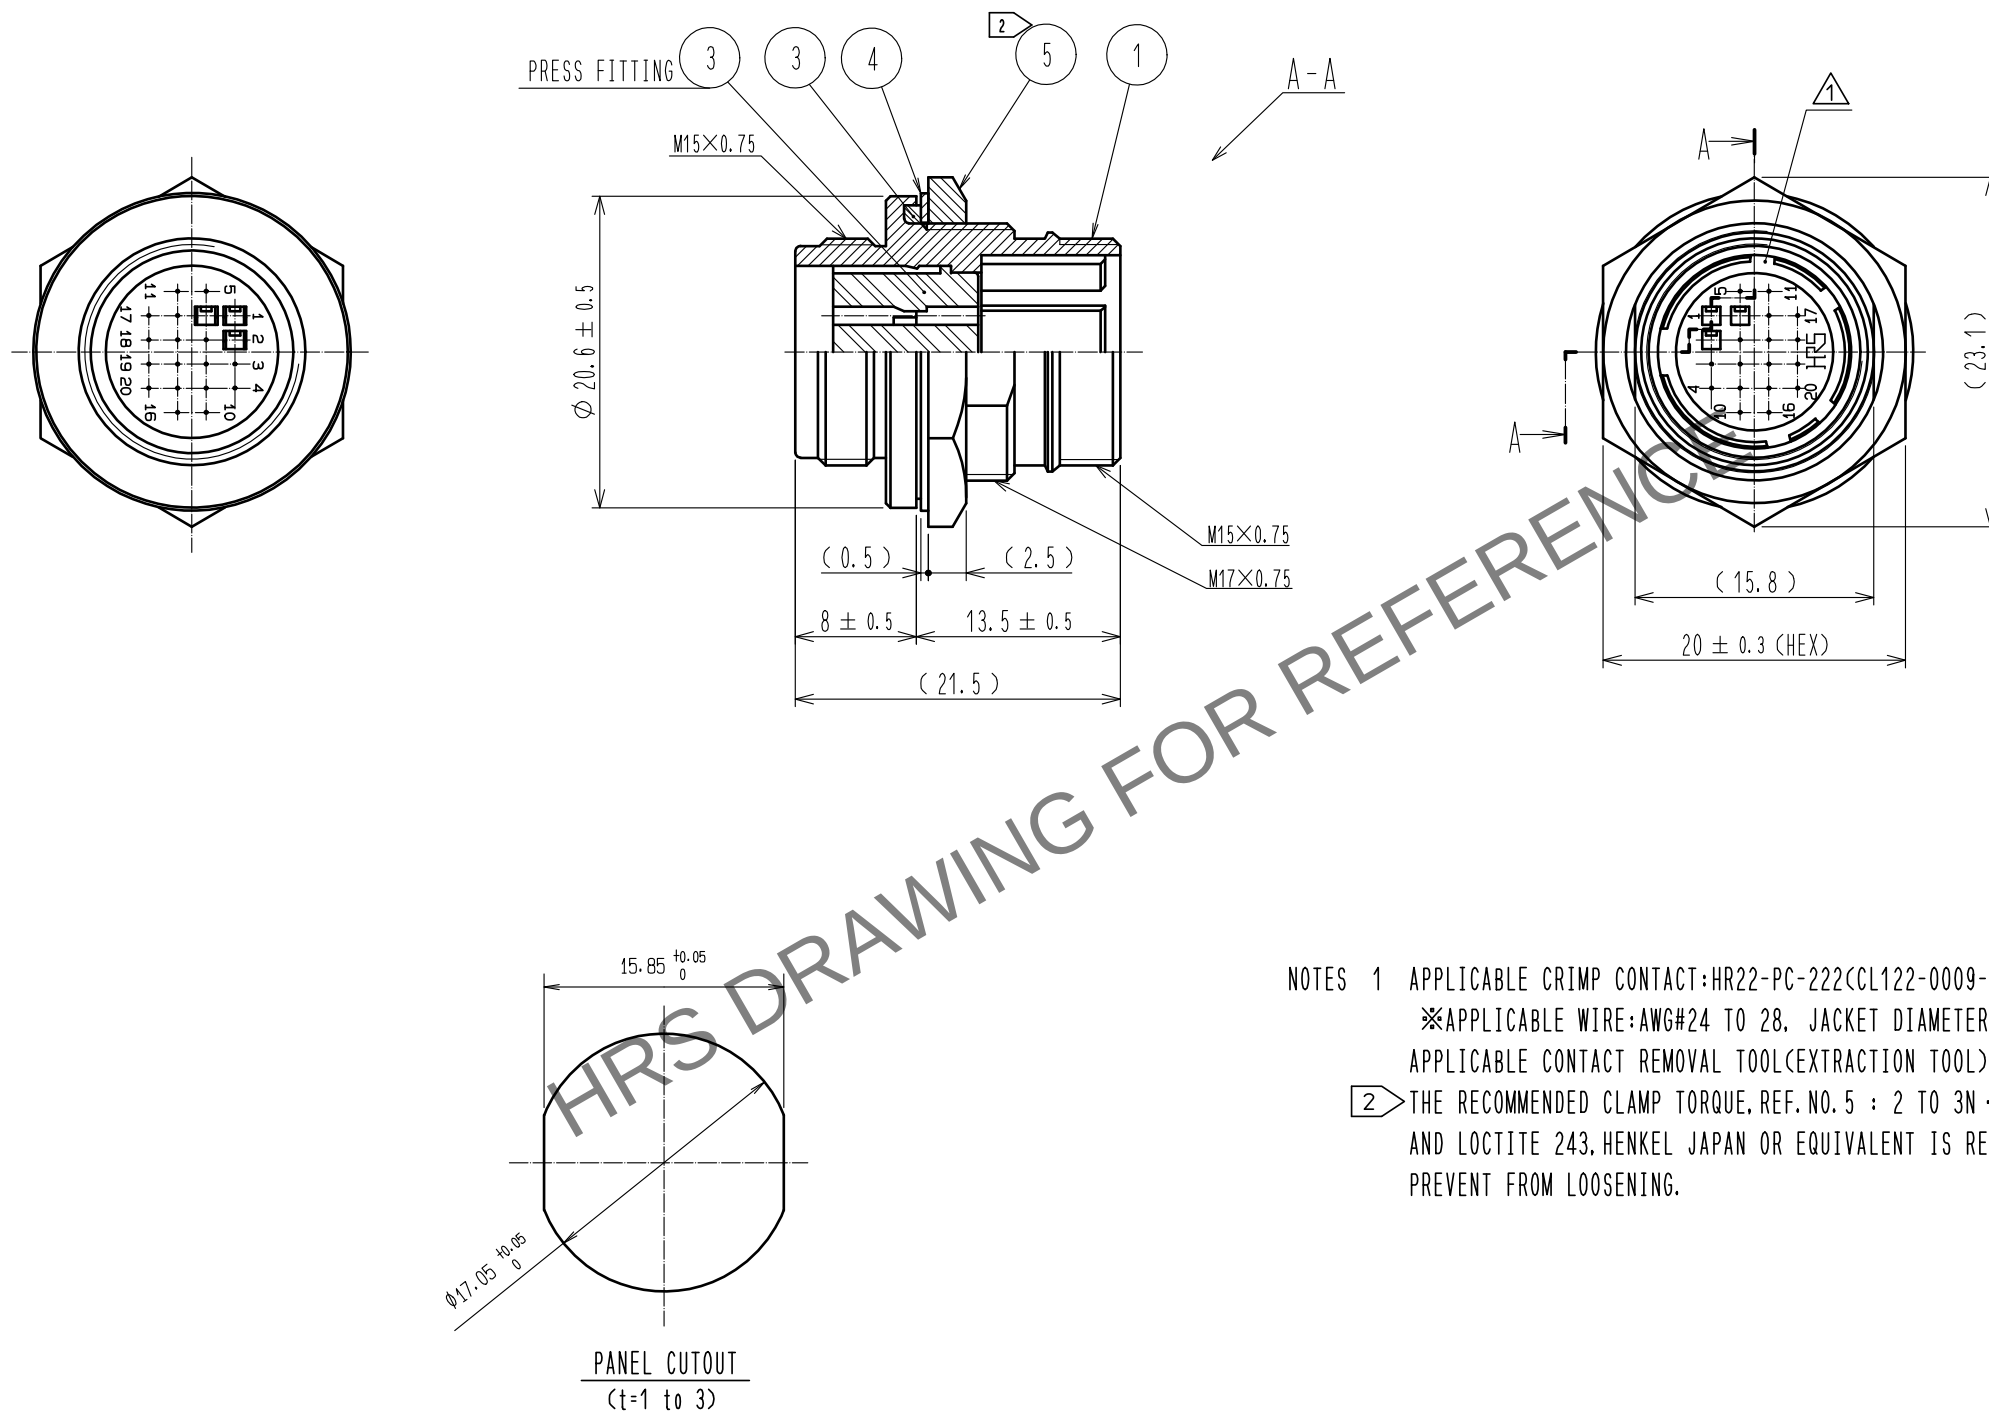

- NOTES 1 APPLICABLE CRIMP CONTACT:HR22-PC-222(CCL122-0009-0)
※APPLICABLE WIRE:AWG#24 TO 28, JACKET DIAMETER:φ1.15(MAX)
APPLICABLE CONTACT REMOVAL TOOL(EXTRACTION TOOL):RP6-SC-TP(CCL150-0039-0)
2 THE RECOMMENDED CLAMP TORQUE, REF.NO.5 : 2 TO 3N・m.
AND LOCTITE 243,HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
PREVENT FROM LOOSENING.

3	Silicone rubber	(Black)			
2	Polybutylene terephthalate	(Black) UL94V-0	5	Brass	Nickel plating
1	Zinc alloy	Nickel plating	4	Brass	Nickel plating
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00020593	DESIGNED HY. KISHI
HIROSE ELECTRIC CO., LTD.		APPROVED :EJ. KUNII	20160213	DRAWING NO.	EDC-042800-73-00
		CHECKED :EJ. KUNII	20160213	PART NO.	HR22-12WTRA-20PC(73)
		DESIGNED :S.J. SHIMIZU	20160213	CODE NO.	CL0122-0005-0-73
		DRAWN :S.J. SHIMIZU	20160213		
					DATE 20250813