
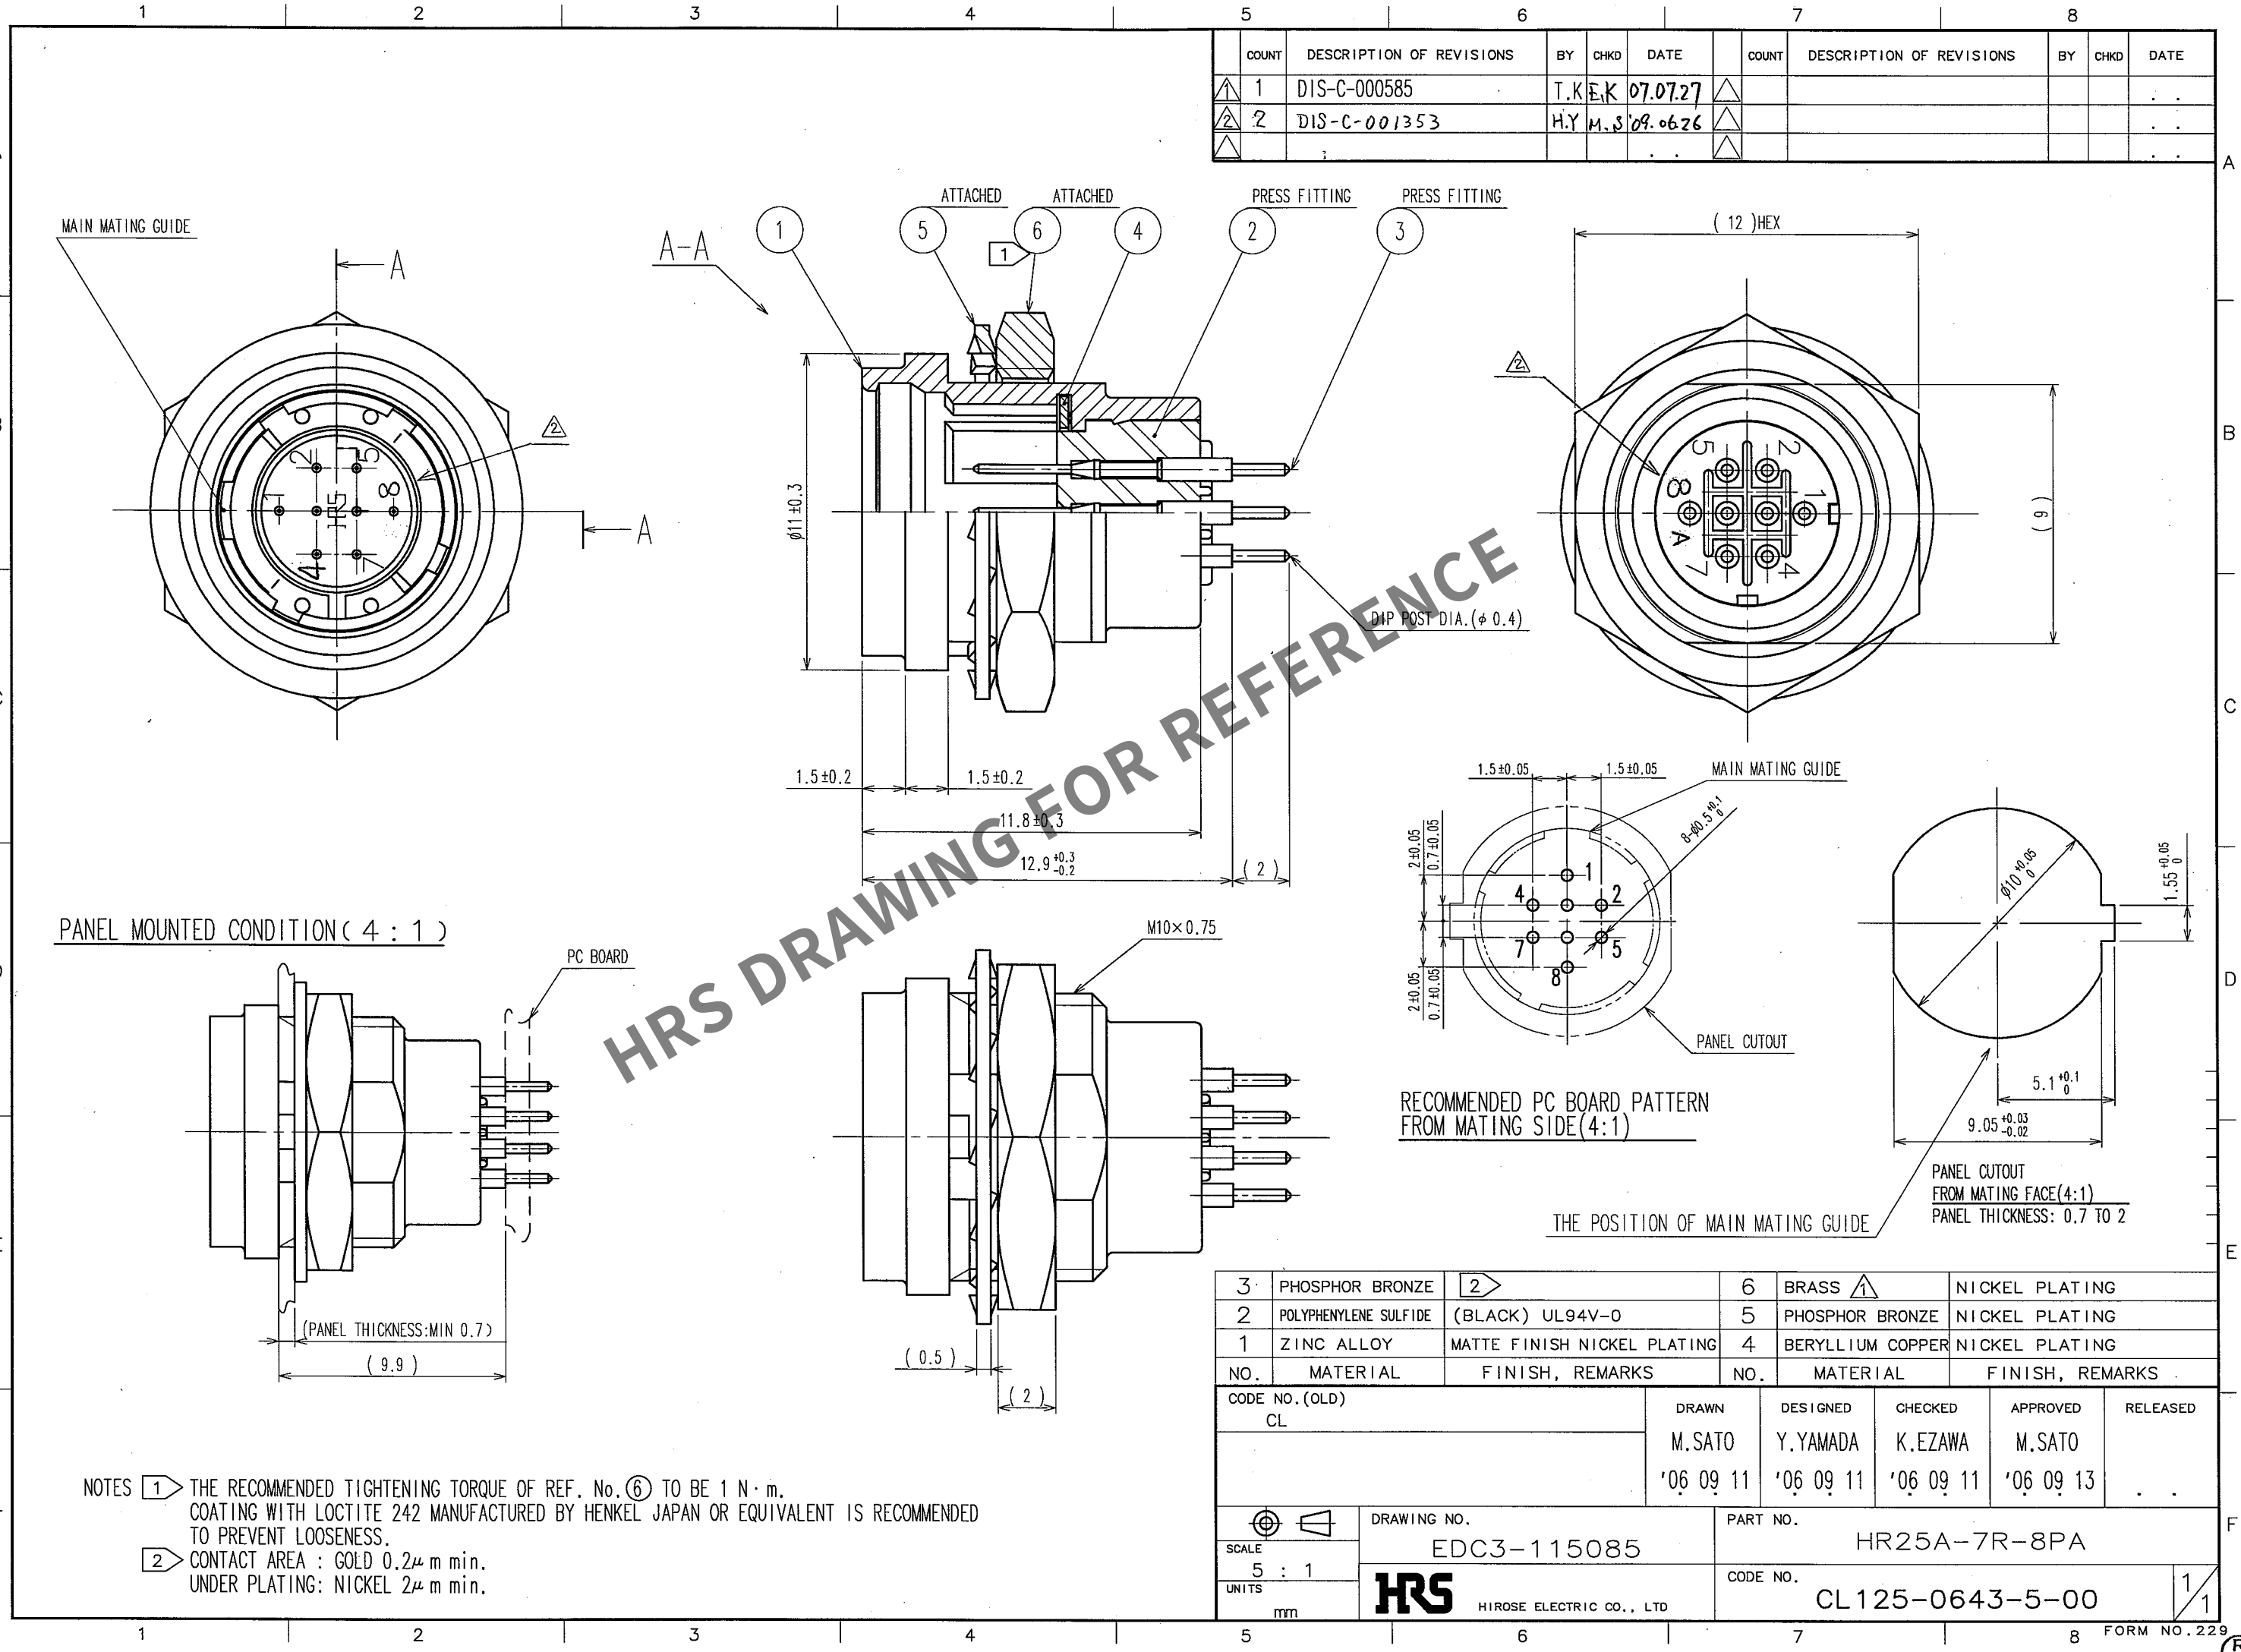


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27					
2	DIS-C-001353	H.Y	M.S	09.06.26					

3	PHOSPHOR BRONZE	2	BRASS	NICKEL PLATING			
2	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	5	PHOSPHOR BRONZE	NICKEL PLATING		
1	ZINC ALLOY	MATTE FINISH NICKEL PLATING	4	BERYLLIUM COPPER	NICKEL PLATING		
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD) CL			DRAWN M.SATO '06 09 11	DESIGNED Y.YAMADA '06 09 11	CHECKED K.EZAWA '06 09 11	APPROVED M.SATO '06 09 13	RELEASED .
		DRAWING NO. EDC3-115085		PART NO. HR25A-7R-8PA			
SCALE 5 : 1		 HIROSE ELECTRIC CO., LTD		CODE NO. CL125-0643-5-00			1/1
UNITS mm							

NOTES 1 THE RECOMMENDED TIGHTENING TORQUE OF REF. No. ⑥ TO BE 1 N·m.
COATING WITH LOCTITE 242 MANUFACTURED BY HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED
TO PREVENT LOOSENESS.
2 CONTACT AREA : GOLD 0.2μm min.
UNDER PLATING: NICKEL 2μm min.

TO
R