


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

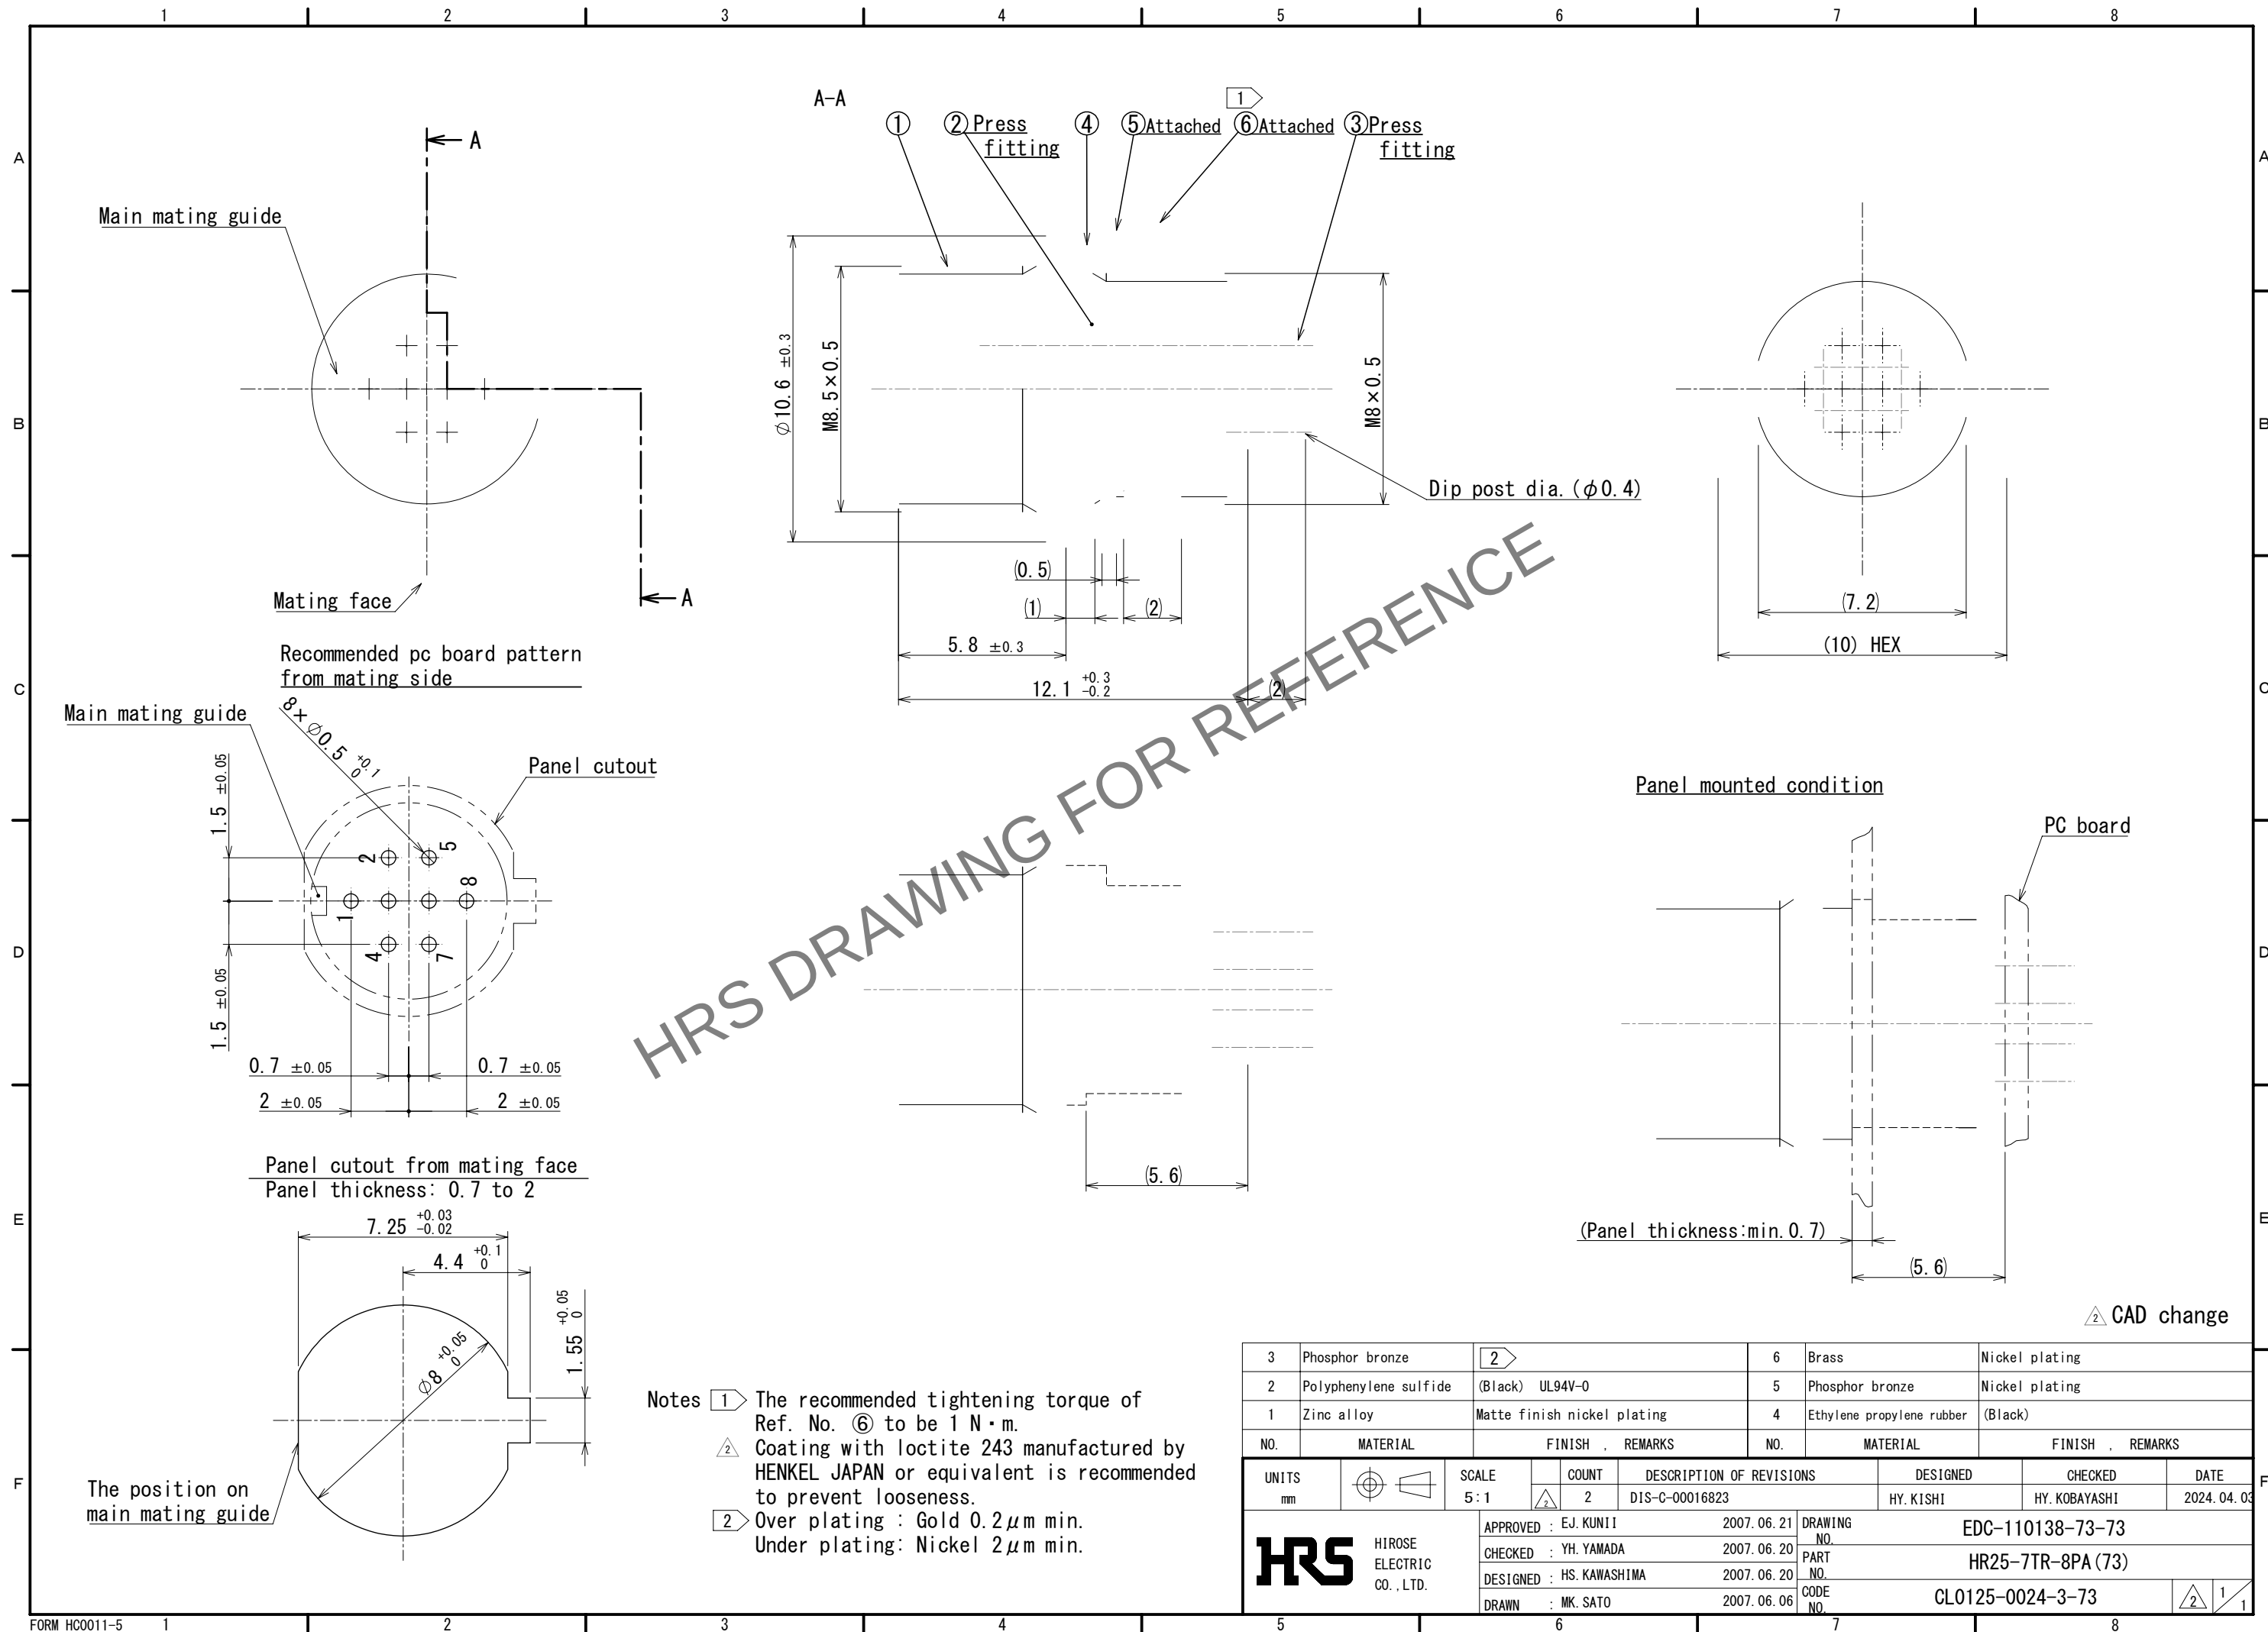

- Notes
- 1 The recommended tightening torque of Ref. No. ⑥ to be 1 N·m.
 - 2 Coating with loctite 243 manufactured by HENKEL JAPAN or equivalent is recommended to prevent looseness.
 - 3 Over plating : Gold $0.2\mu\text{m}$ min.
Under plating: Nickel $2\mu\text{m}$ min.

3	Phosphor bronze	2	6	Brass	Nickel plating
2	Polyphenylene sulfide	(Black) UL94V-0	5	Phosphor bronze	Nickel plating
1	Zinc alloy	Matte finish nickel plating	4	Ethylene propylene rubber	(Black)
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00016823	DESIGNED HY. KISHI
	HIROSE ELECTRIC CO., LTD.	APPROVED : EJ. KUNII	2007. 06. 21	DRAWING NO. EDC-110138-73-73	CHECKED HY. KOBAYASHI
		CHECKED : YH. YAMADA	2007. 06. 20	PART NO. HR25-7TR-8PA (73)	DATE 2024. 04. 03
		DESIGNED : HS. KAWASHIMA	2007. 06. 20	CODE NO. CL0125-0024-3-73	
		DRAWN : MK. SATO	2007. 06. 06		