



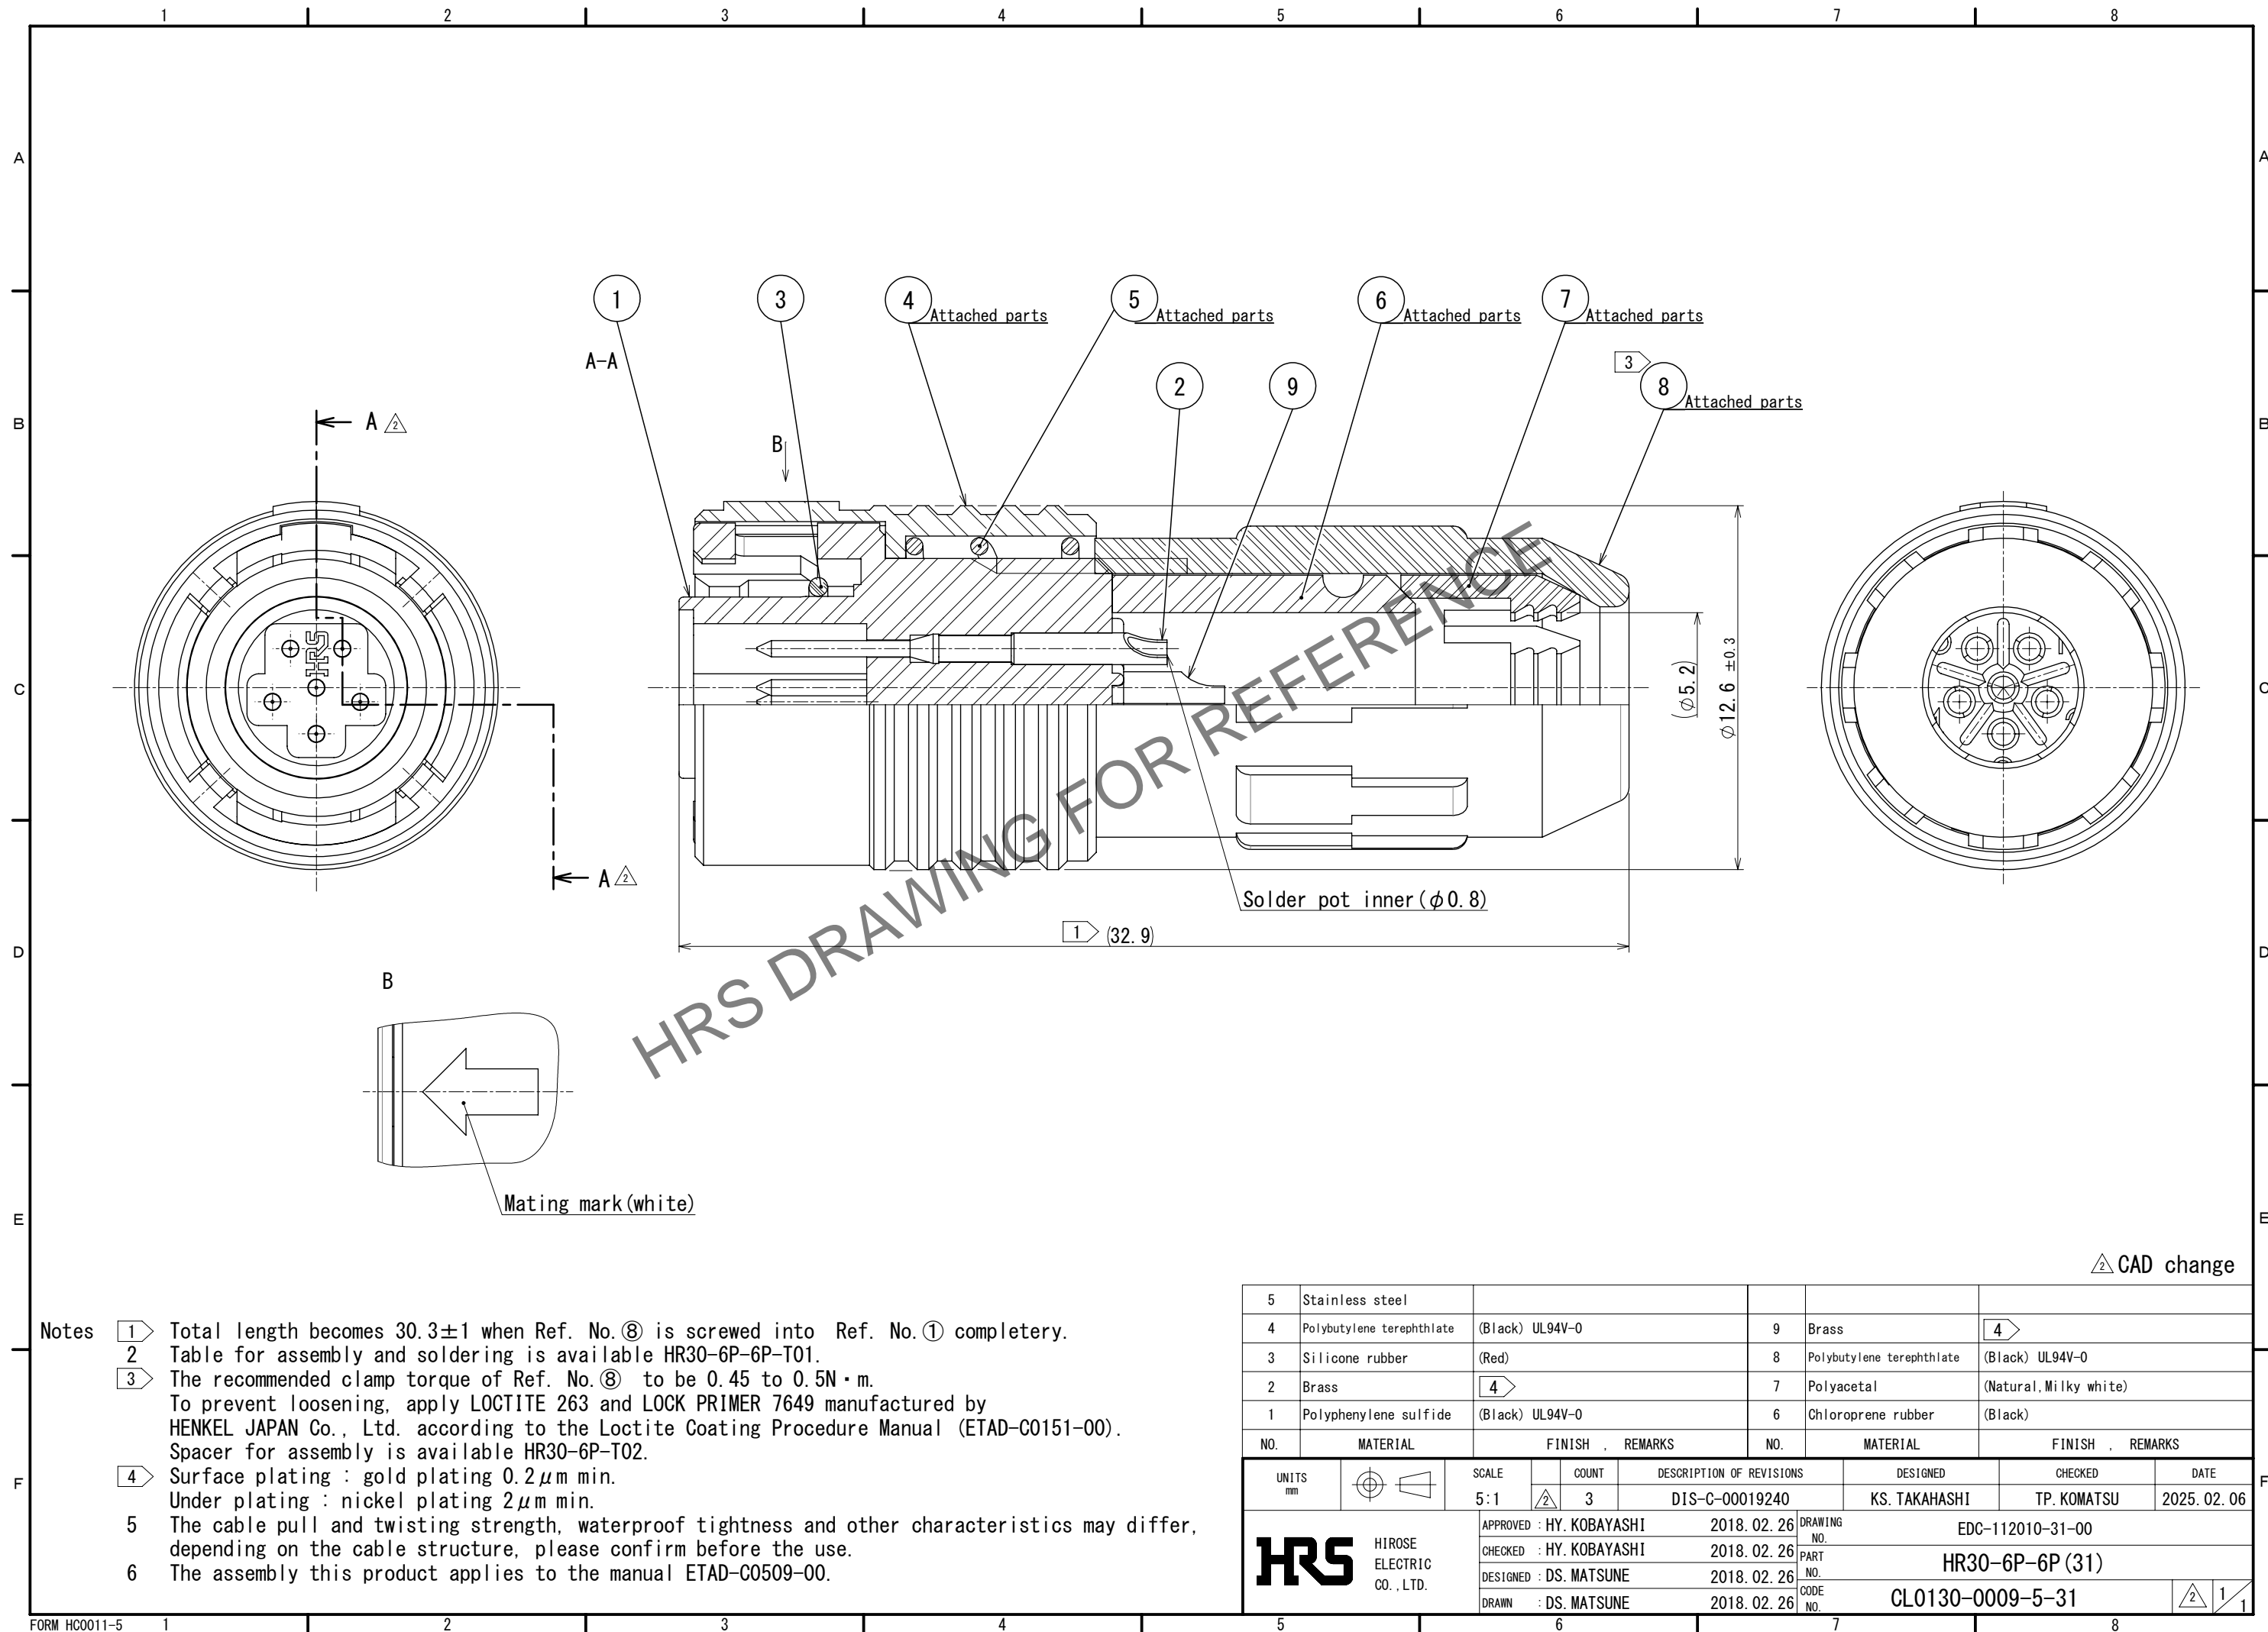

Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes
- 1 Total length becomes 30.3 ± 1 when Ref. No. ⑧ is screwed into Ref. No. ① completely.
 - 2 Table for assembly and soldering is available HR30-6P-6P-T01.
 - 3 The recommended clamp torque of Ref. No. ⑧ to be 0.45 to 0.5N・m.
To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00).
Spacer for assembly is available HR30-6P-T02.
 - 4 Surface plating : gold plating $0.2 \mu\text{m}$ min.
Under plating : nickel plating $2 \mu\text{m}$ min.
 - 5 The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.
 - 6 The assembly this product applies to the manual ETAD-C0509-00.

5	Stainless steel						
4	Polybutylene terephthlate	(Black) UL94V-0	9	Brass	4		
3	Silicone rubber	(Red)	8	Polybutylene terephthlate	(Black) UL94V-0		
2	Brass	4	7	Polyacetal	(Natural, Milky white)		
1	Polyphenylene sulfide	(Black) UL94V-0	6	Chloroprene rubber	(Black)		
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS	

UNITS mm		SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		5:1		3	DIS-C-00019240	KS. TAKAHASHI	TP. KOMATSU	2025. 02. 06
		APPROVED : HY. KOBAYASHI 2018. 02. 26				DRAWING NO. EDC-112010-31-00		
		CHECKED : HY. KOBAYASHI 2018. 02. 26				PART NO. HR30-6P-6P (31)		
		DESIGNED : DS. MATSUNE 2018. 02. 26				CODE NO. CL0130-0009-5-31		
 HIROSE ELECTRIC CO., LTD.		DRAWN : DS. MATSUNE 2018. 02. 26				