


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

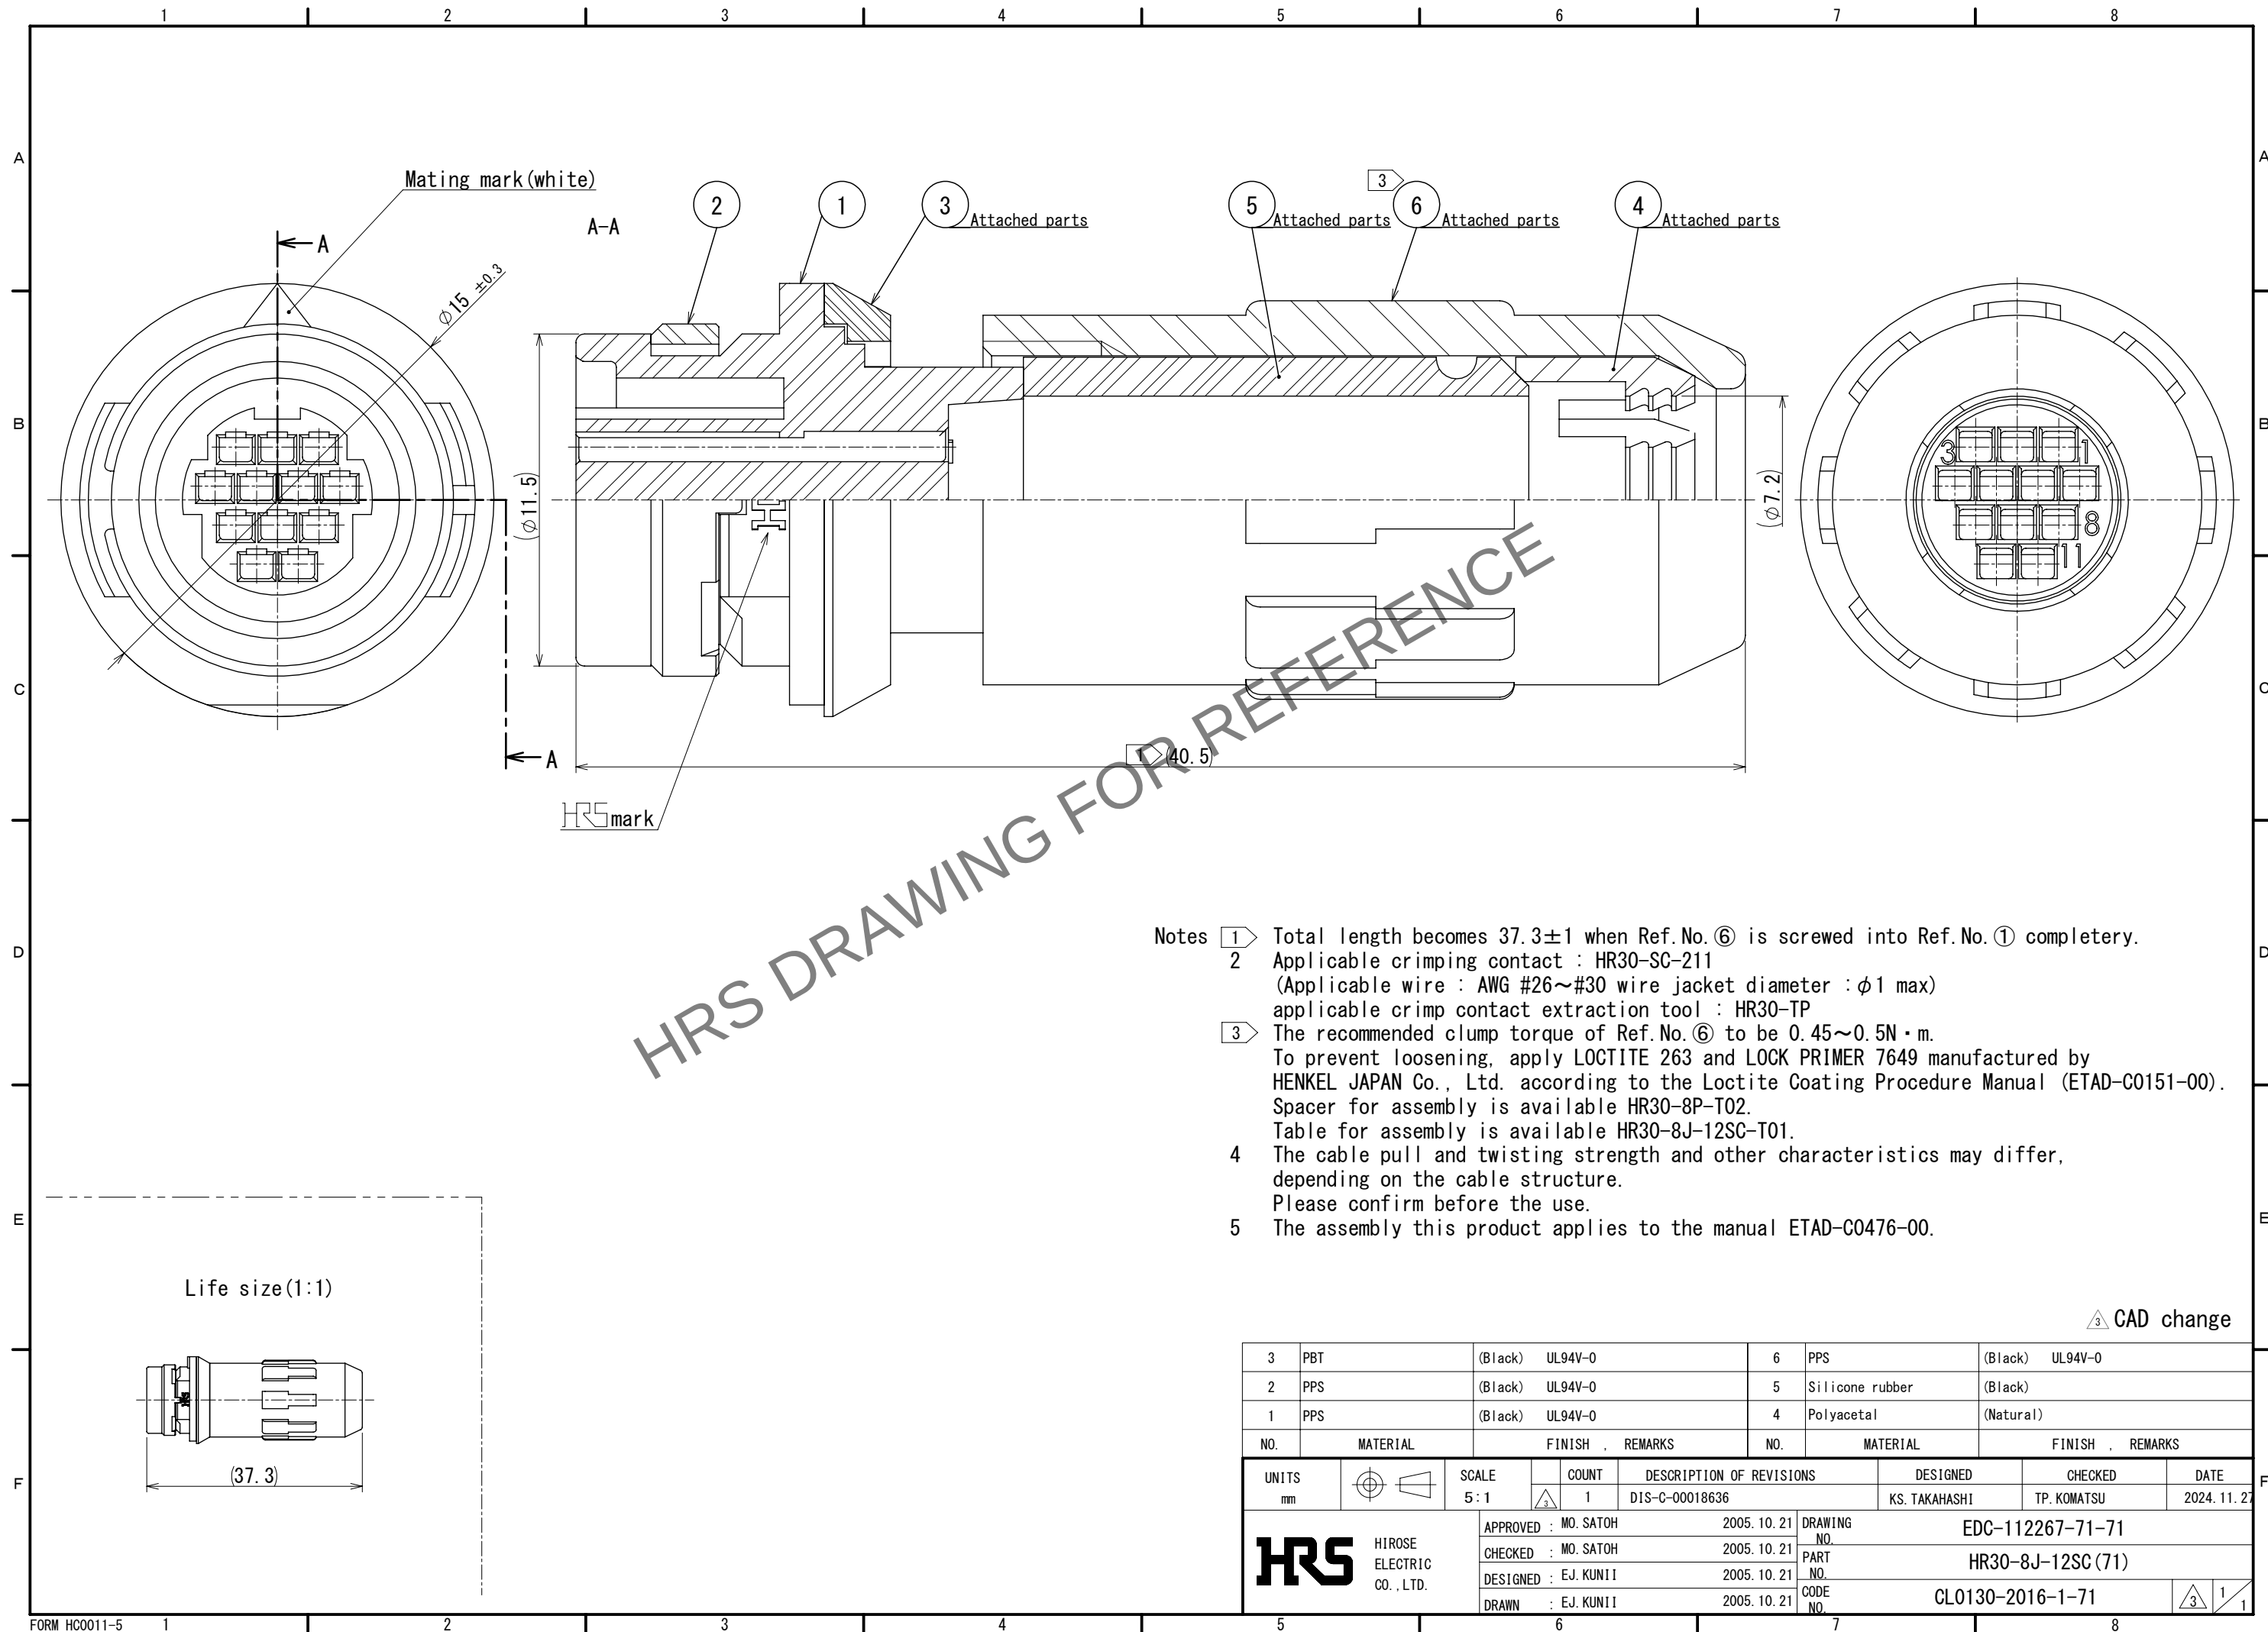

- Notes
- ① Total length becomes 37.3 ± 1 when Ref.No.⑥ is screwed into Ref.No.① completely.
 - ② Applicable crimping contact : HR30-SC-211
(Applicable wire : AWG #26~#30 wire jacket diameter : $\phi 1$ max)
applicable crimp contact extraction tool : HR30-TP
 - ③ The recommended clump torque of Ref.No.⑥ to be $0.45 \sim 0.5N \cdot m$.
To prevent loosening, apply LOCTITE 263 and LOCK PRIMER 7649 manufactured by HENKEL JAPAN Co., Ltd. according to the Loctite Coating Procedure Manual (ETAD-C0151-00).
Spacer for assembly is available HR30-8P-T02.
Table for assembly is available HR30-8J-12SC-T01.
 - ④ The cable pull and twisting strength and other characteristics may differ, depending on the cable structure.
Please confirm before the use.
 - ⑤ The assembly this product applies to the manual ETAD-C0476-00.

△ CAD change

3	PBT	(Black)	UL94V-0	6	PPS	(Black)	UL94V-0
2	PPS	(Black)	UL94V-0	5	Silicone rubber	(Black)	
1	PPS	(Black)	UL94V-0	4	Polyacetal	(Natural)	
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
UNITS mm		SCALE 5:1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00018636		DESIGNED KS. TAKAHASHI	CHECKED TP. KOMATSU
HIROSE ELECTRIC CO., LTD.		APPROVED : MO. SATOH	2005. 10. 21	DRAWING NO. EDC-112267-71-71			
		CHECKED : MO. SATOH	2005. 10. 21	PART NO. HR30-8J-12SC (71)			
		DESIGNED : EJ. KUNII	2005. 10. 21	CODE NO. CL0130-2016-1-71			
		DRAWN : EJ. KUNII	2005. 10. 21				