


Aug.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

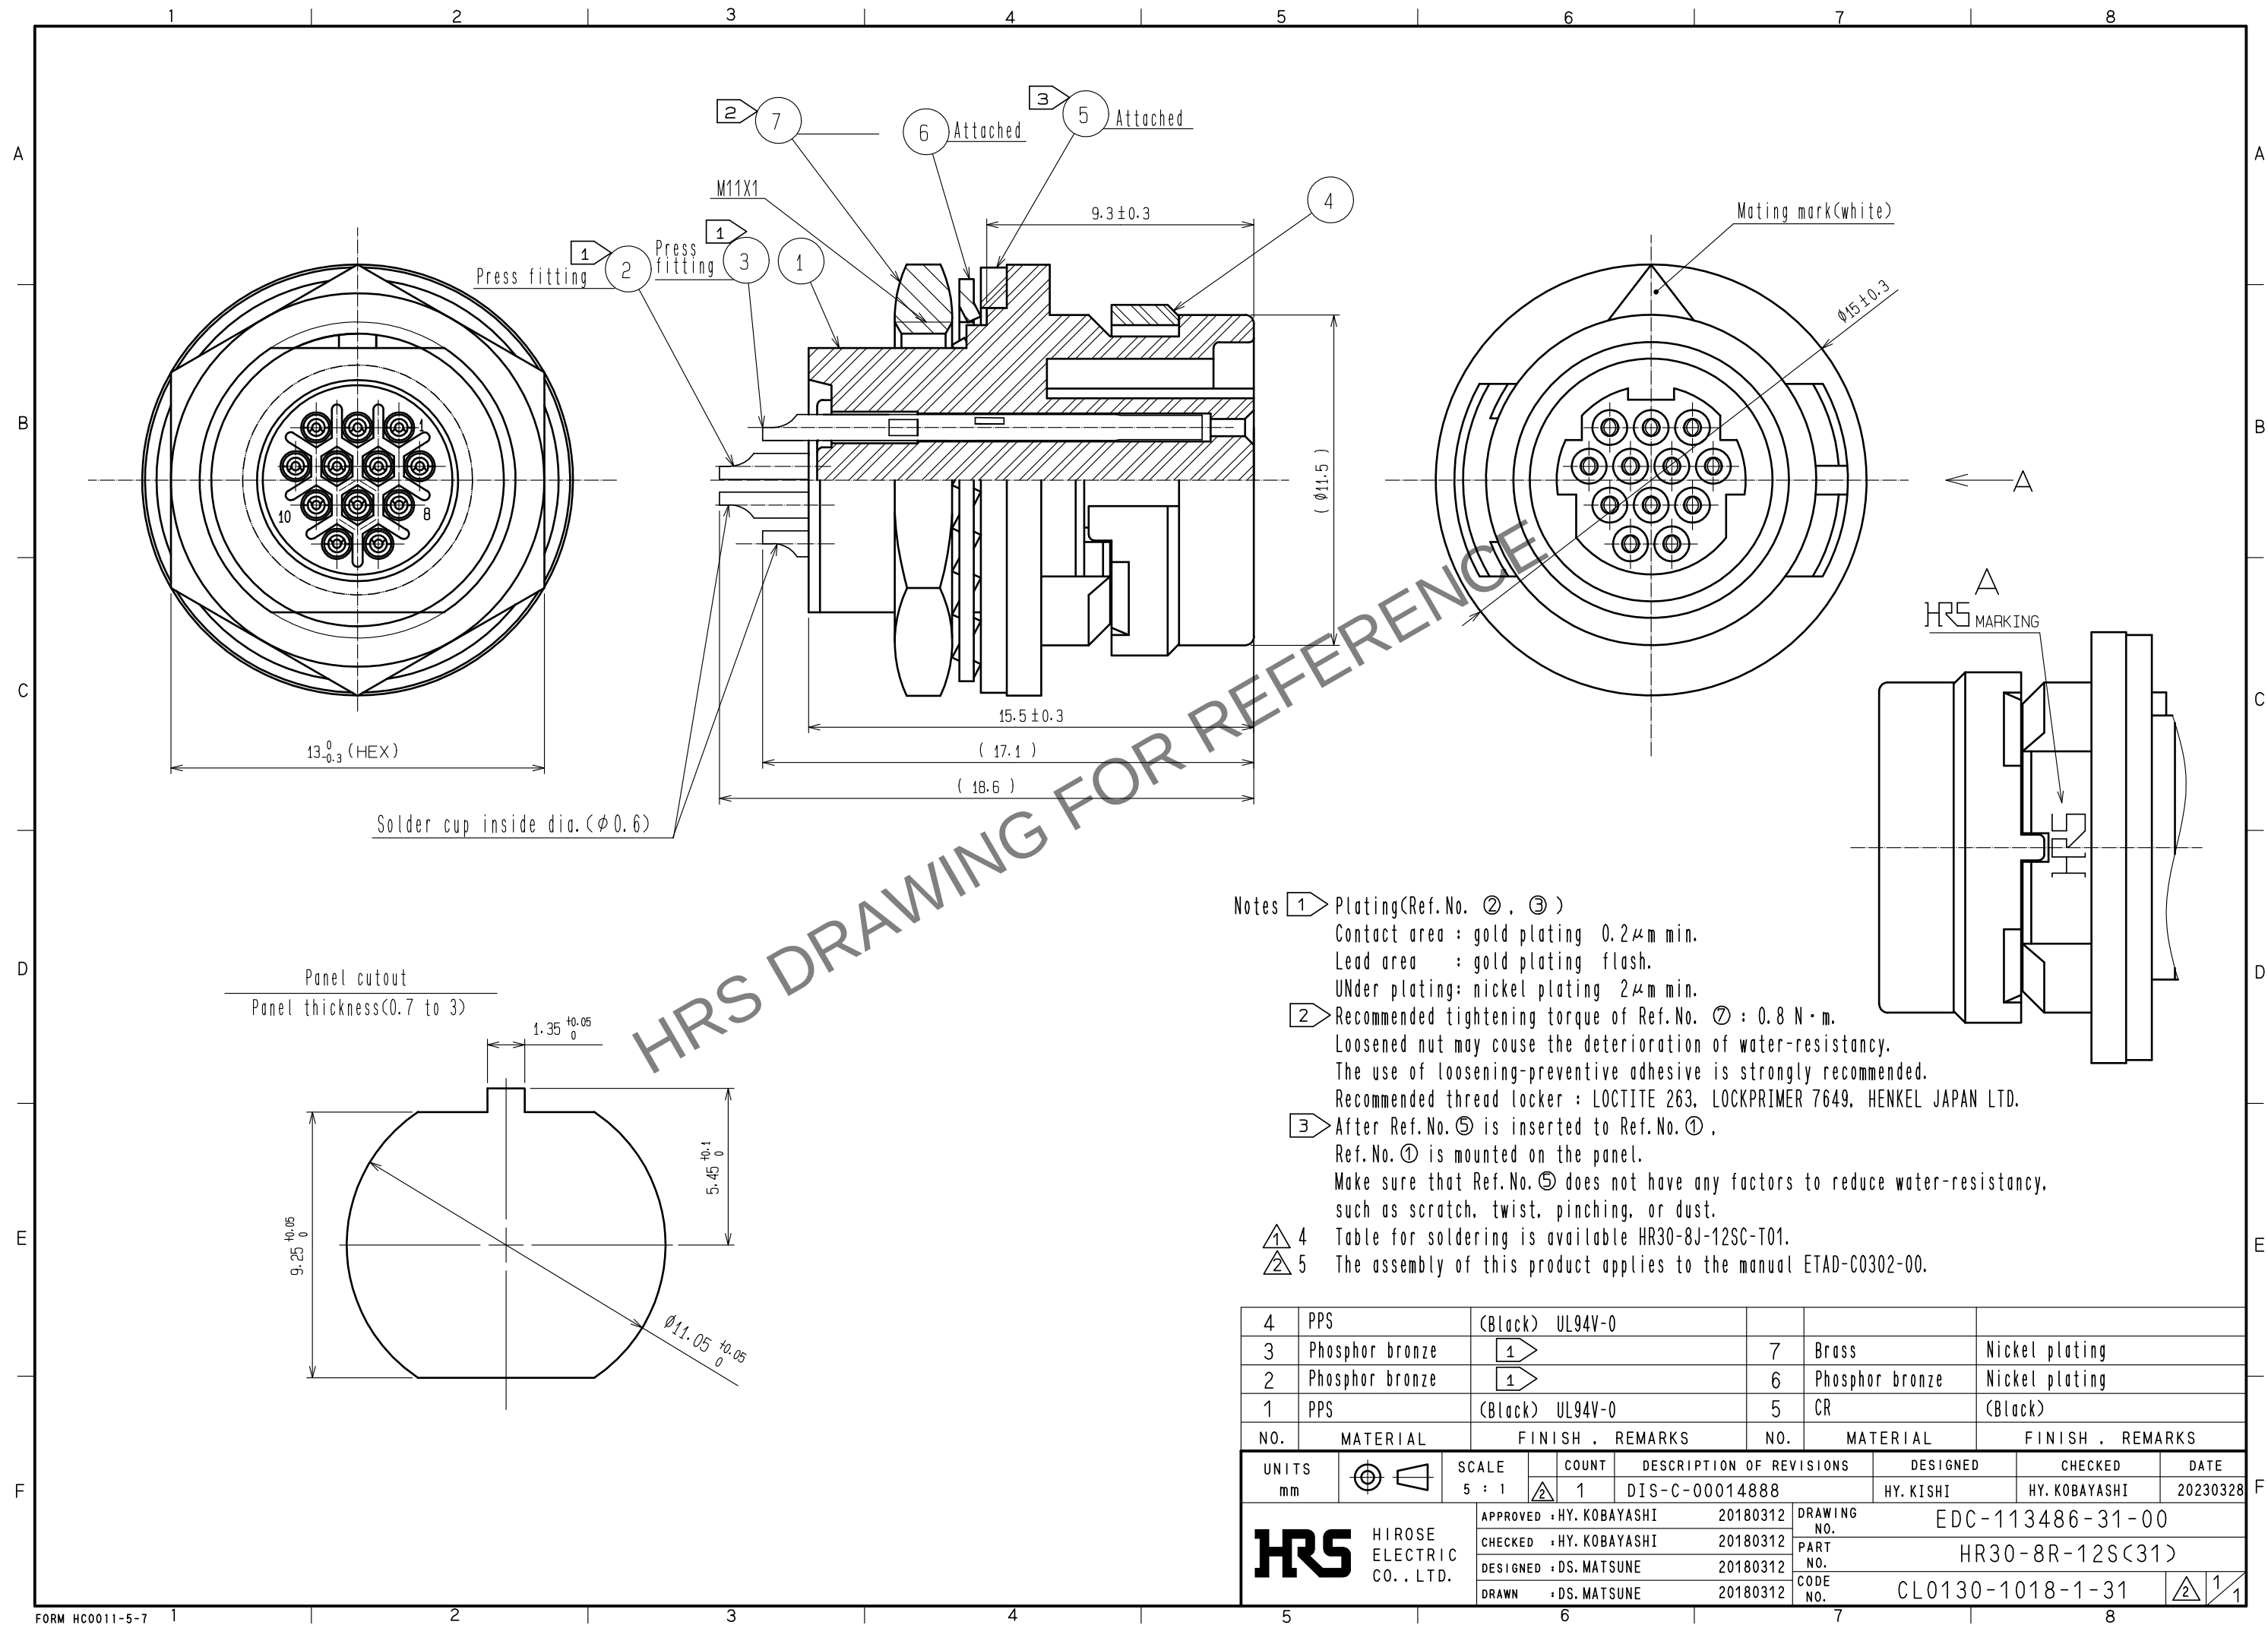

Notes ① Plating(Ref. No. ②, ③)
Contact area : gold plating 0.2μm min.
Lead area : gold plating flash.
Under plating: nickel plating 2μm min.
② Recommended tightening torque of Ref. No. ⑦ : 0.8 N·m.
Loosened nut may cause the deterioration of water-resistance.
The use of loosening-preventive adhesive is strongly recommended.
Recommended thread locker : LOCTITE 263, LOCKPRIMER 7649, HENKEL JAPAN LTD.
③ After Ref. No. ⑤ is inserted to Ref. No. ①,
Ref. No. ① is mounted on the panel.
Make sure that Ref. No. ⑤ does not have any factors to reduce water-resistance,
such as scratch, twist, pinching, or dust.
④ Table for soldering is available HR30-8J-12SC-T01.
⑤ The assembly of this product applies to the manual ETAD-C0302-00.

4	PPS	(Black) UL94V-0			
3	Phosphor bronze	①	7	Brass	Nickel plating
2	Phosphor bronze	①	6	Phosphor bronze	Nickel plating
1	PPS	(Black) UL94V-0	5	CR	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm	⊙	SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-C-00014888	DESIGNED HY. KISHI
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HY. KOBAYASHI	20180312	DRAWING NO.	EDC-113486-31-00
		CHECKED : HY. KOBAYASHI	20180312	PART NO.	HR30-8R-12S(31)
		DESIGNED : DS. MATSUNE	20180312	CODE NO.	CL0130-1018-1-31
		DRAWN : DS. MATSUNE	20180312		
					DATE 20230328