



Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

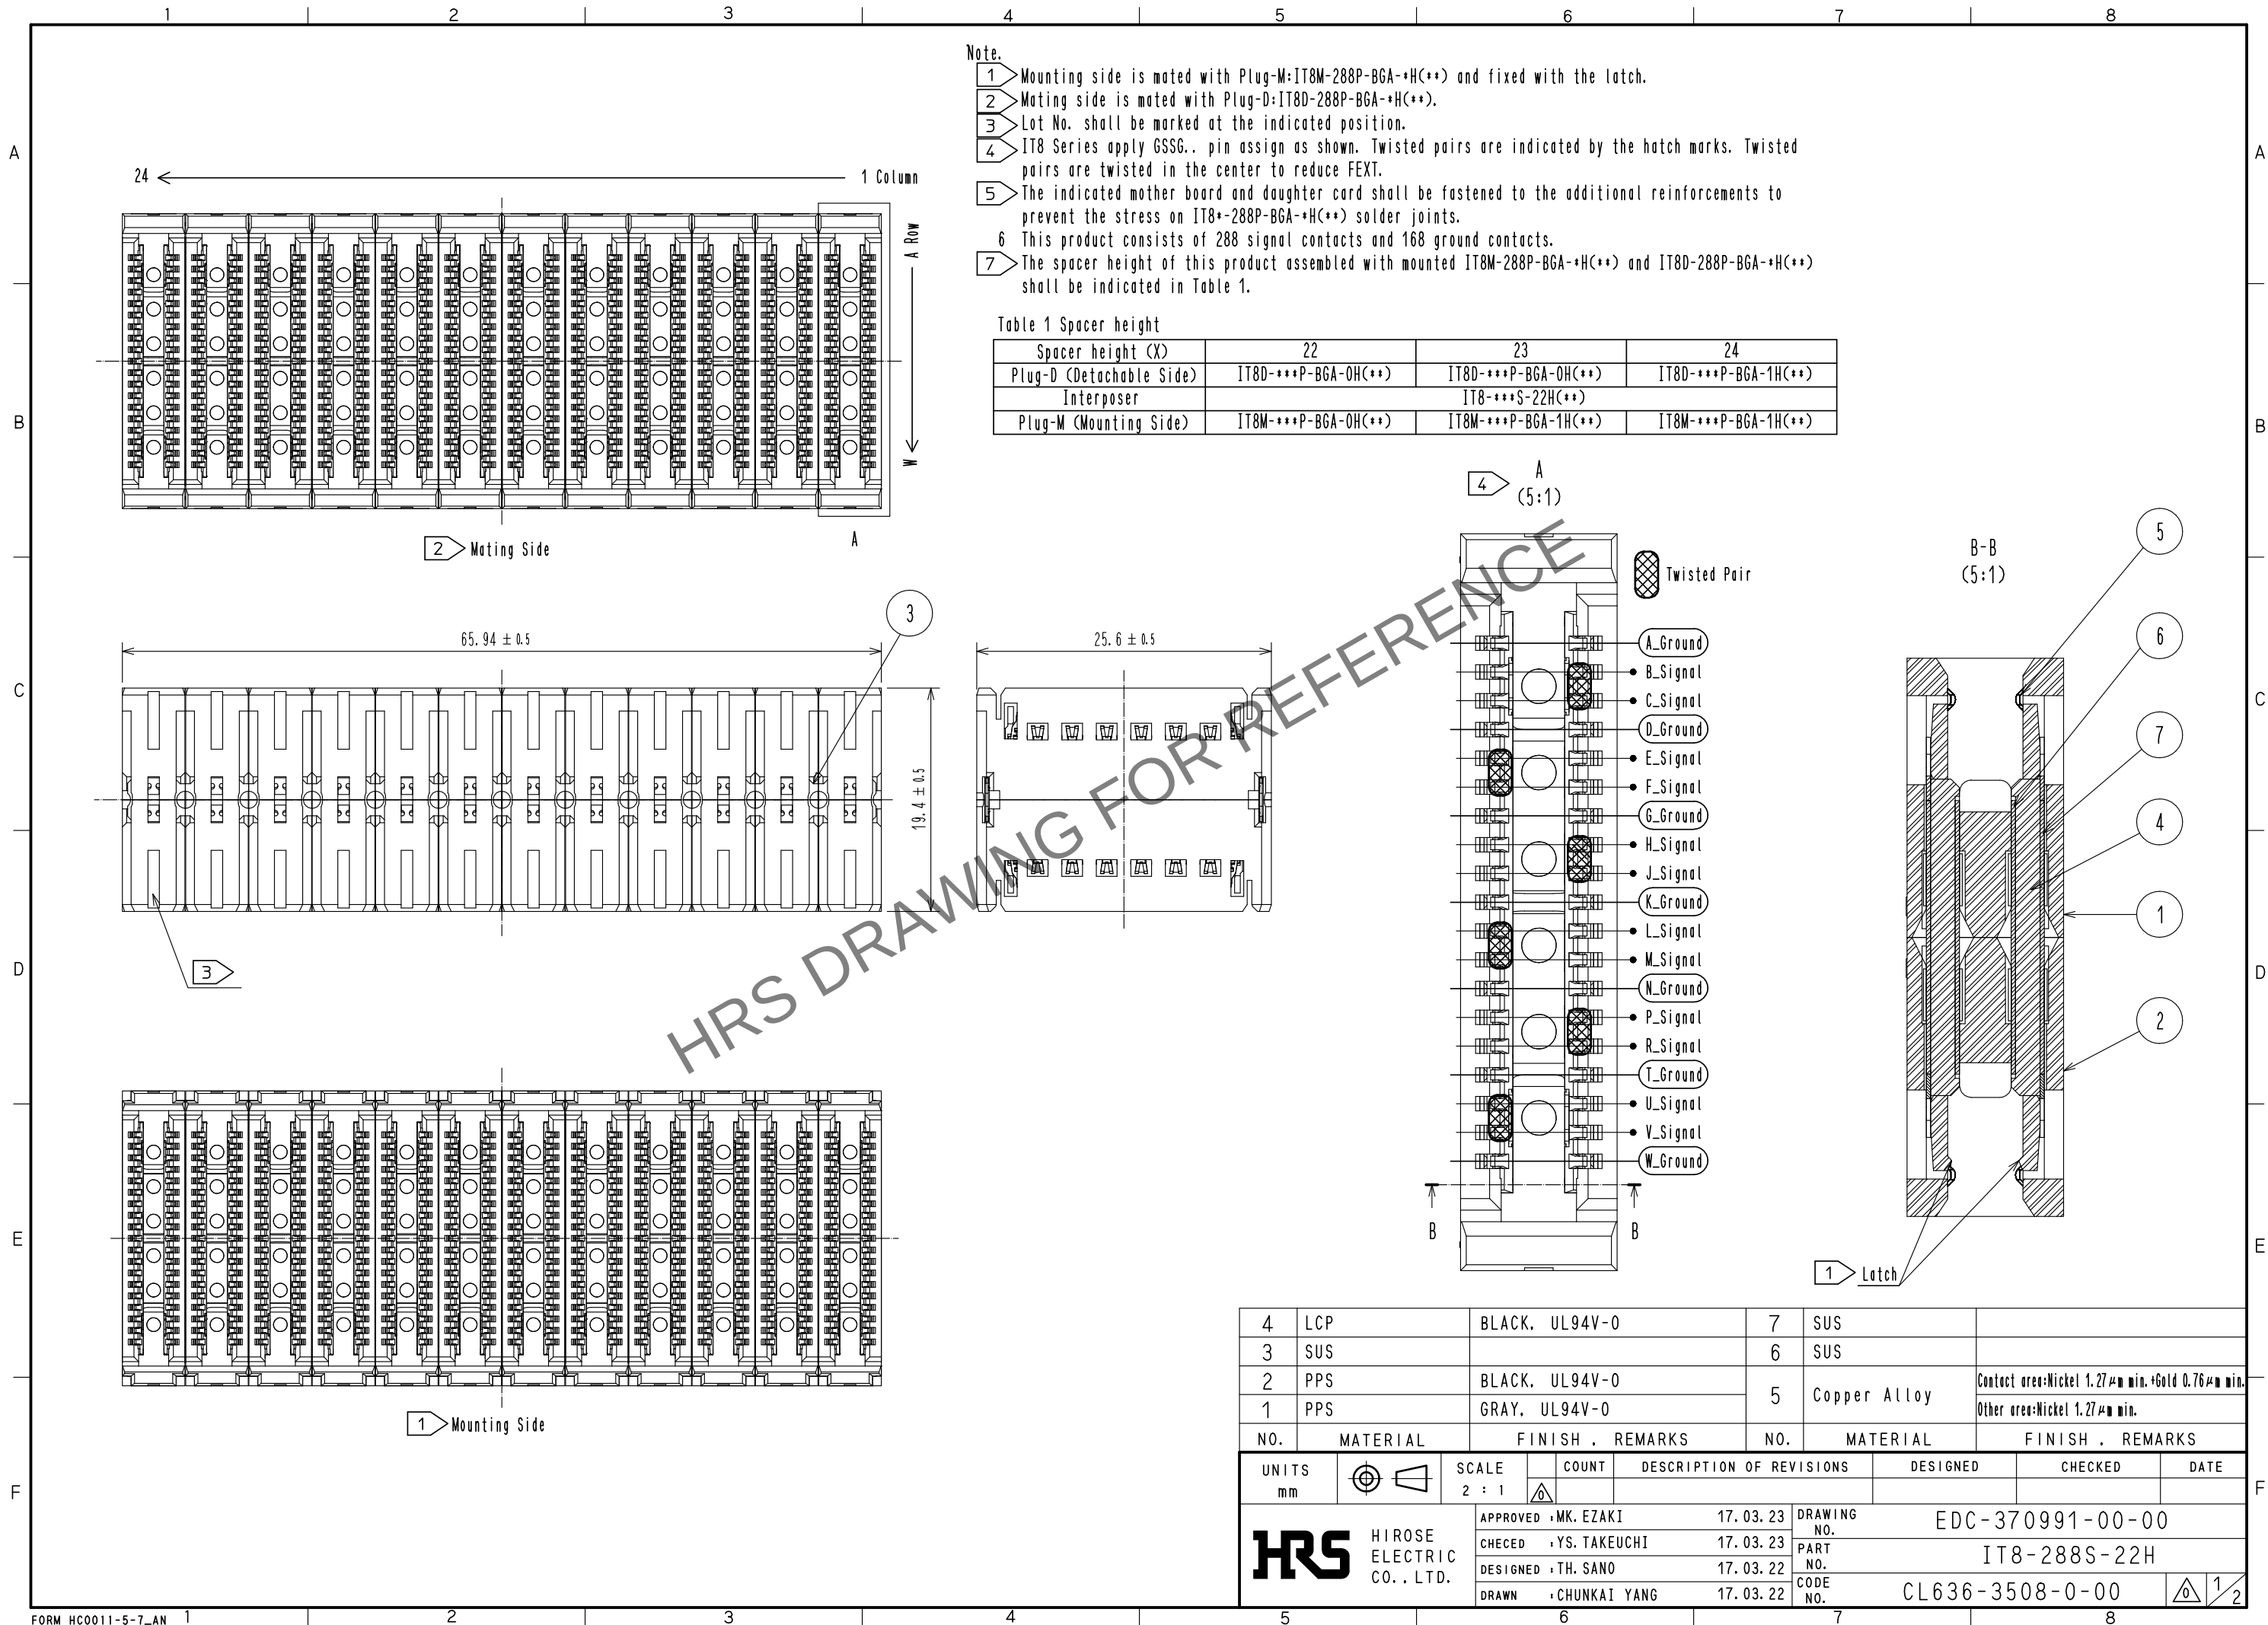

Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

## IT8 Assembly Process

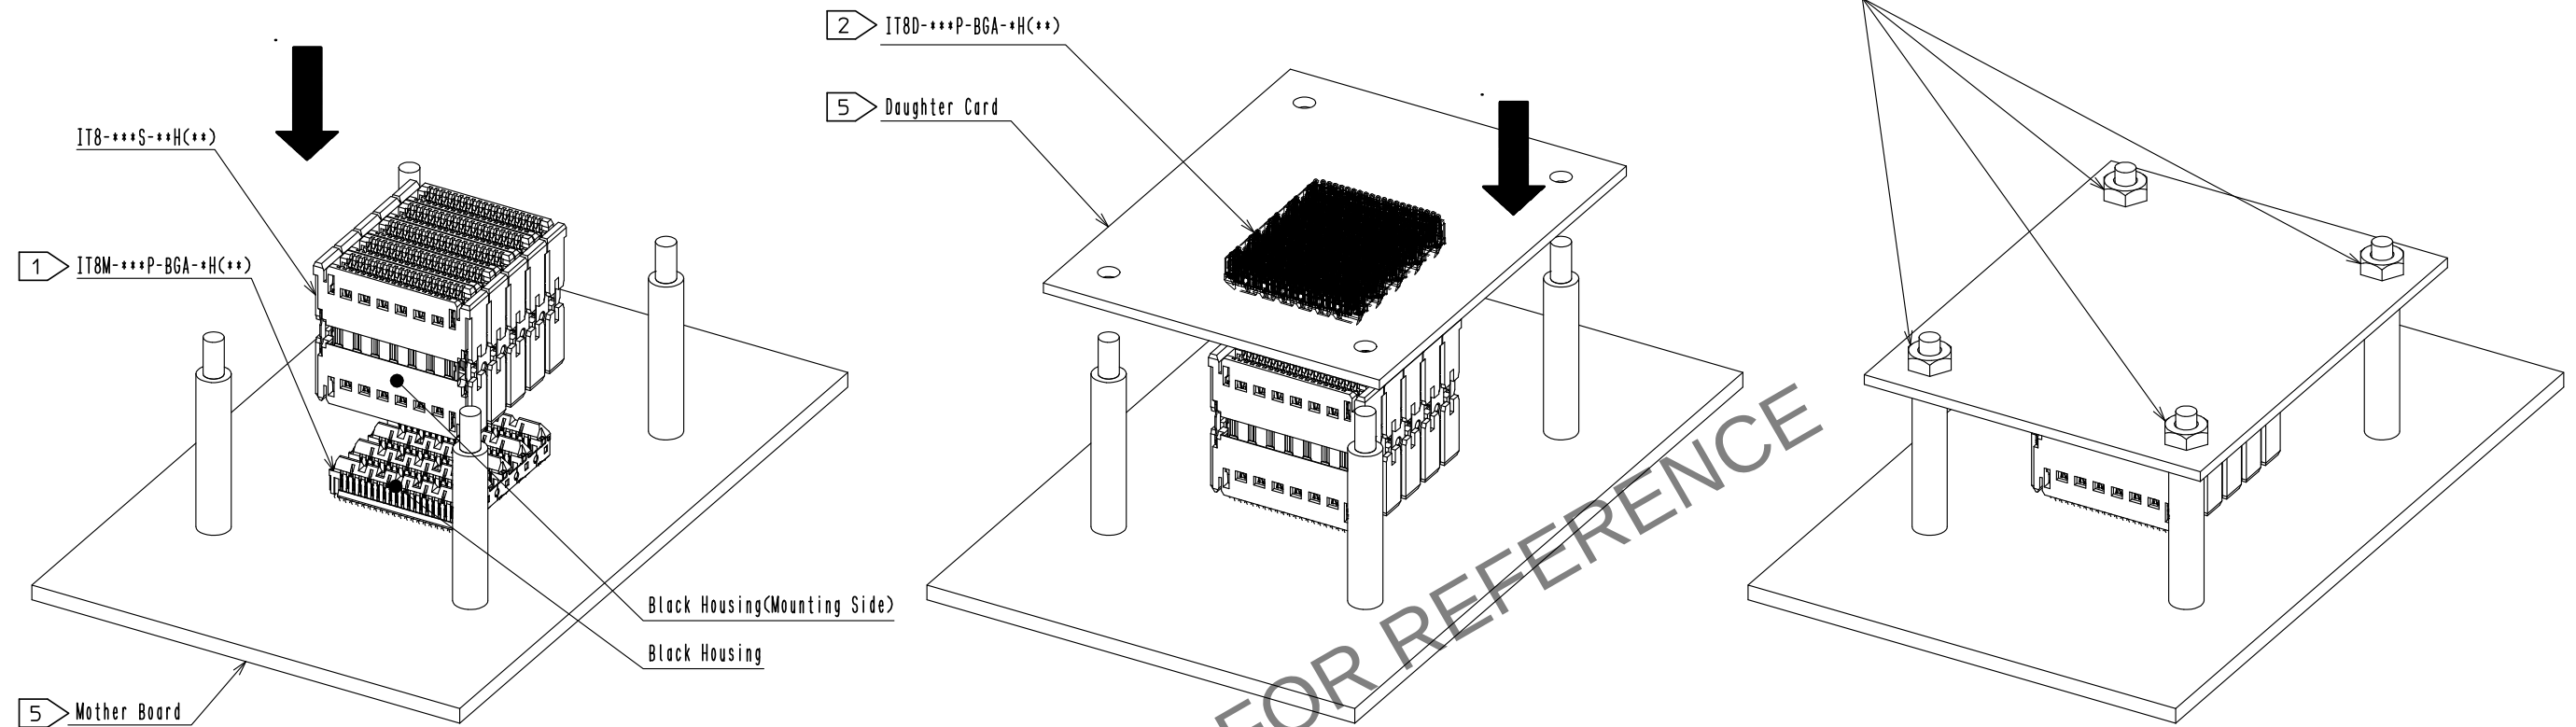


1) Insert mounting side of Interposer(IT8-\*\*\*S-\*\*\*H(\*\*)) by pressing on top of Interposer into reflowed Mounting Plug(IT8M-\*\*\*P-BGA-\*\*\*H(\*\*)) having black housings.

2) Insert Detachable Plug(IT8D-\*\*\*P-BGA-\*\*\*H(\*\*)) having gray housings into mating side of Interposer(IT8-\*\*\*S-\*\*\*H(\*\*)).

3) Install and tighten nuts to fix mated Detachable Plug after completion of mating.

## IT8 Mated Condition

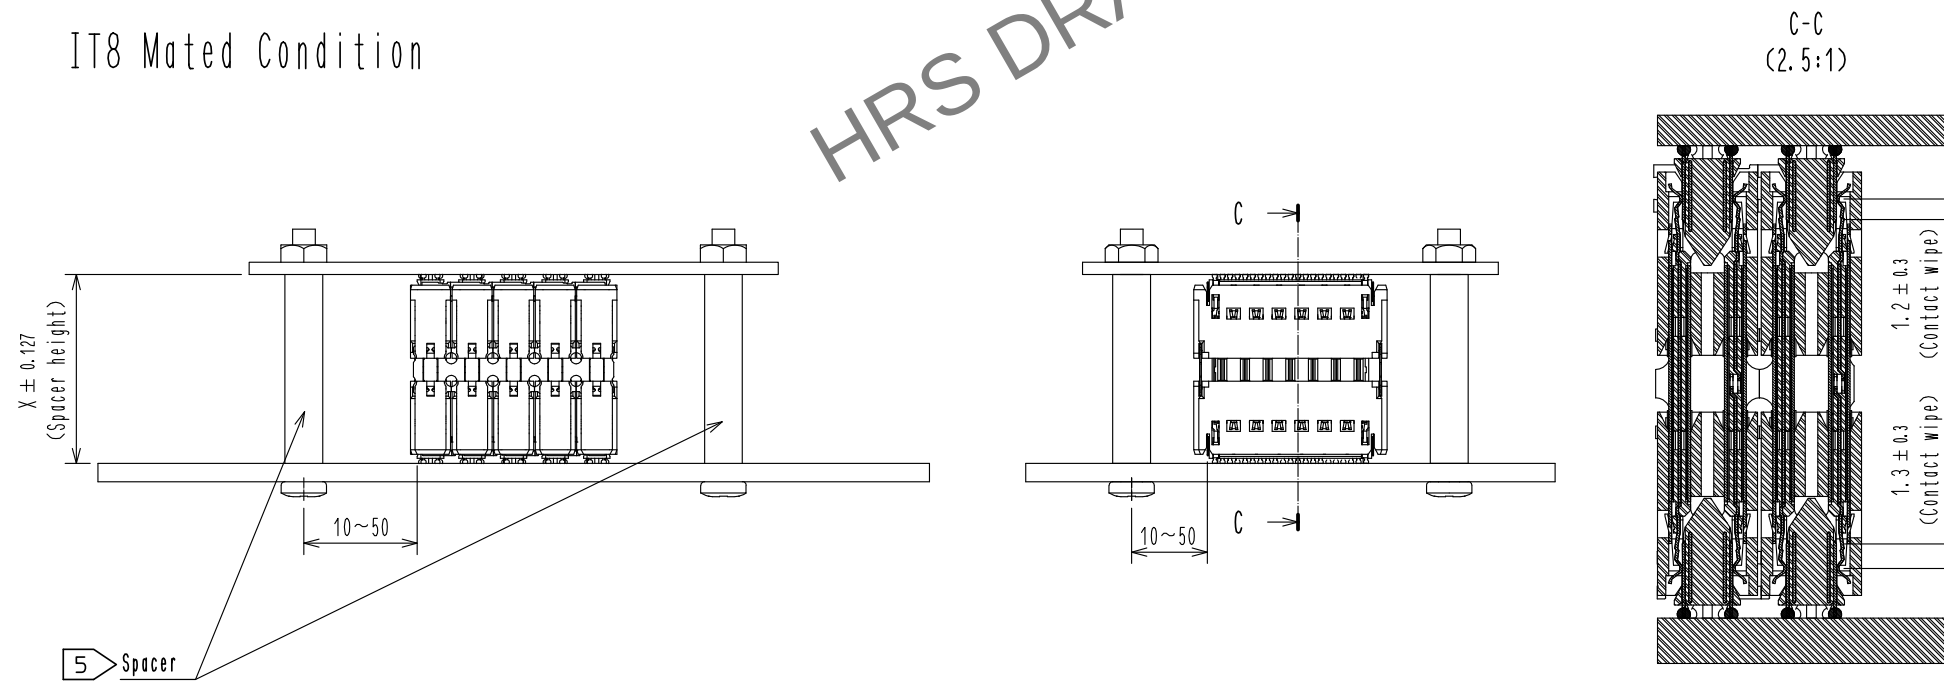

HRS

|             |                  |
|-------------|------------------|
| DRAWING NO. | EDC-370991-00-00 |
| PART NO.    | IT8-288S-22H     |
| CODE NO.    | CL636-3508-0-00  |

2/2