



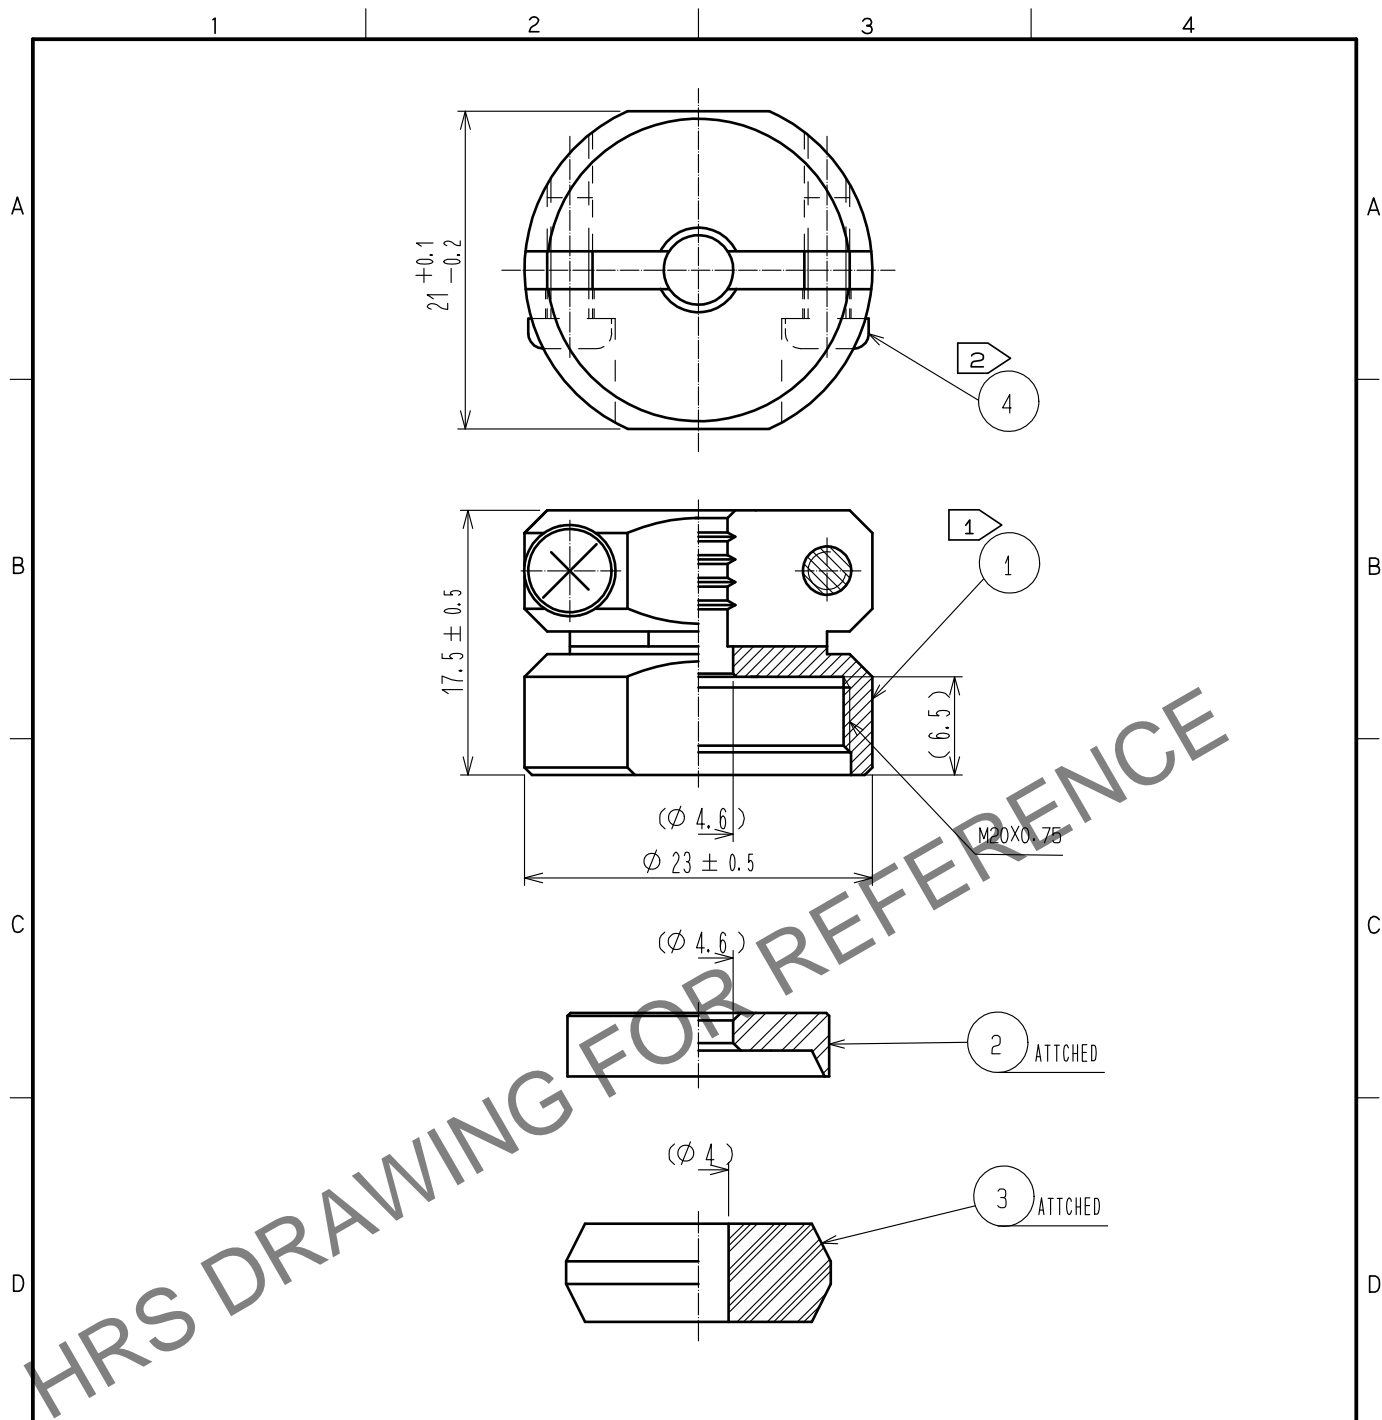


Aug.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- Notes ① The recommended clamp torque of REF. No. ① to be 3 to 3.5 N·m.
LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent
REF. No. ① from loosening.
- ② The recommended clamp torque of REF. No. ④ to be 0.65 to 0.7 N·m.
- 3 Sealing and airtightness and oil resisting shall be tested
under mated condition with an applicable connector.

2	POLYPHENYLENE SULFIDE	(BLACK)	UL94V-0	4	STAINLESS STEEL	M3×0.5×8		
1	BRASS	BLACK CHROME PLATING		3	ACRYLONITRILE BUTADIENE RUBBER	(GRAY)		
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED	HY. KOBAYASHI	15.08.05	DRAWING NO.	EDC-110600-71-00		
		CHECKED	HY. KOBAYASHI	15.08.05	PART NO.	JR16WCC-4(71)		
		DESIGNED	HY. KISHI	15.08.05	CODE NO.	CL114-2052-6-71		
		DRAWN	HY. KISHI	15.08.05			1	