


Sep.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

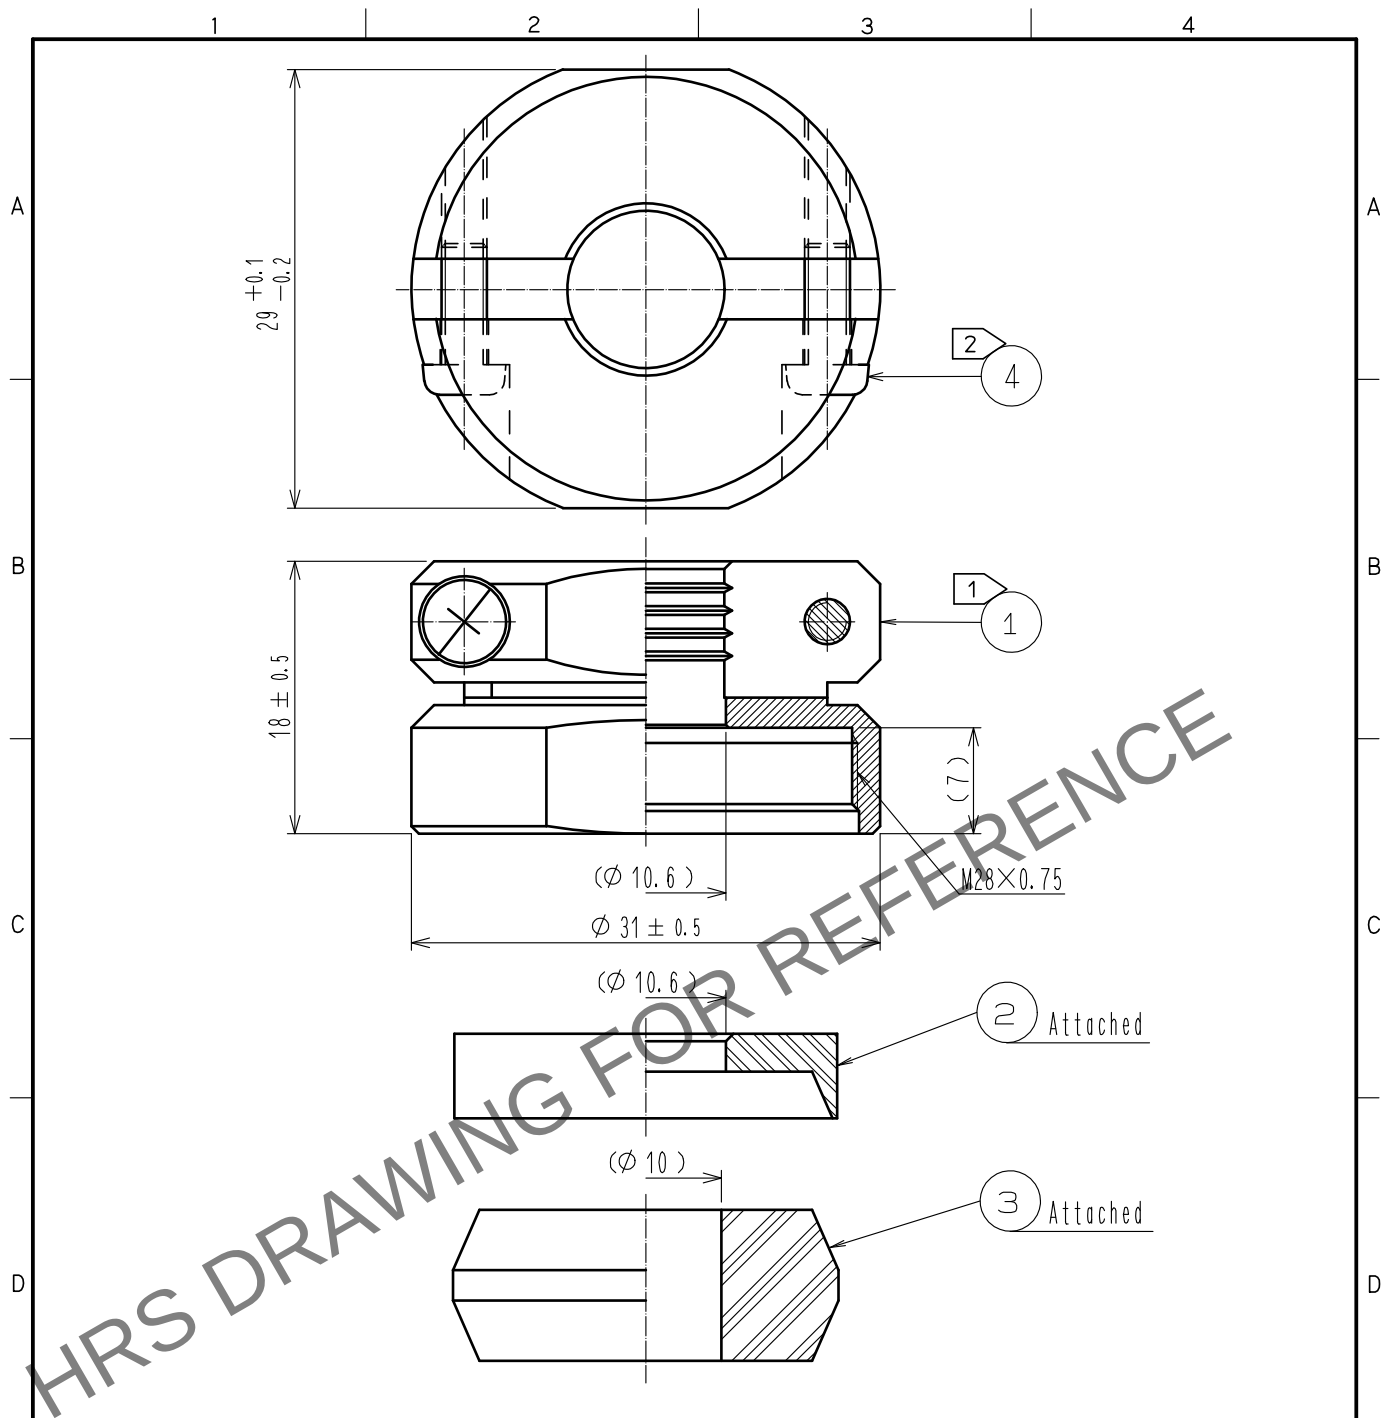

- Notes
- ① The recommended clamp torque of ref. No. ① : 5 to 5.5 N · m .  
LOCTITE 263, HENKEL JAPAN or equevalent is recommended to prevent  
ref. No. ① from loosening.
  - ② The recommended clamp torque of ref. No. ④ to be 0.65 to 0.7 N · m .
  3. The cable pull and twisting strength, waterproof tightness and other characteristics  
may differ, depending on the cable structure. Please confirm before the use.

|                                 |          |                      |   |                                |                          |                  |          |                              |      |
|---------------------------------|----------|----------------------|---|--------------------------------|--------------------------|------------------|----------|------------------------------|------|
| 2                               | PPS      | (Black) UL94V-0      | 4 | Stainless steel                | M3×0.5×8                 |                  |          |                              |      |
| 1                               | Brass    | Black chrome plating | 3 | Acrylonitrile butadiene rubber | (Grey)                   |                  |          |                              |      |
| NO.                             | MATERIAL | FINISH . REMARKS     |   | NO.                            | MATERIAL                 | FINISH . REMARKS |          |                              |      |
| UNITS<br>mm                     |          | SCALE<br>2 : 1       |   | COUNT                          | DESCRIPTION OF REVISIONS |                  | DESIGNED | CHECKED                      | DATE |
| HIROSE<br>ELECTRIC<br>CO., LTD. |          | APPROVED             |   | HY. KOBAYASHI                  |                          | 15. 09. 10       |          | DRAWING NO. EDC-110614-71-71 |      |
|                                 |          | CHECKED              |   | HY. KOBAYASHI                  |                          | 15. 09. 10       |          | PART NO. JR25WCC-10(71)      |      |
|                                 |          | DESIGNED             |   | TH. KAMEYA                     |                          | 15. 09. 09       |          | CODE NO. CL114-2064-5-71     |      |
|                                 |          | DRAWN                |   | TH. KAMEYA                     |                          | 15. 09. 09       |          | 1                            |      |