
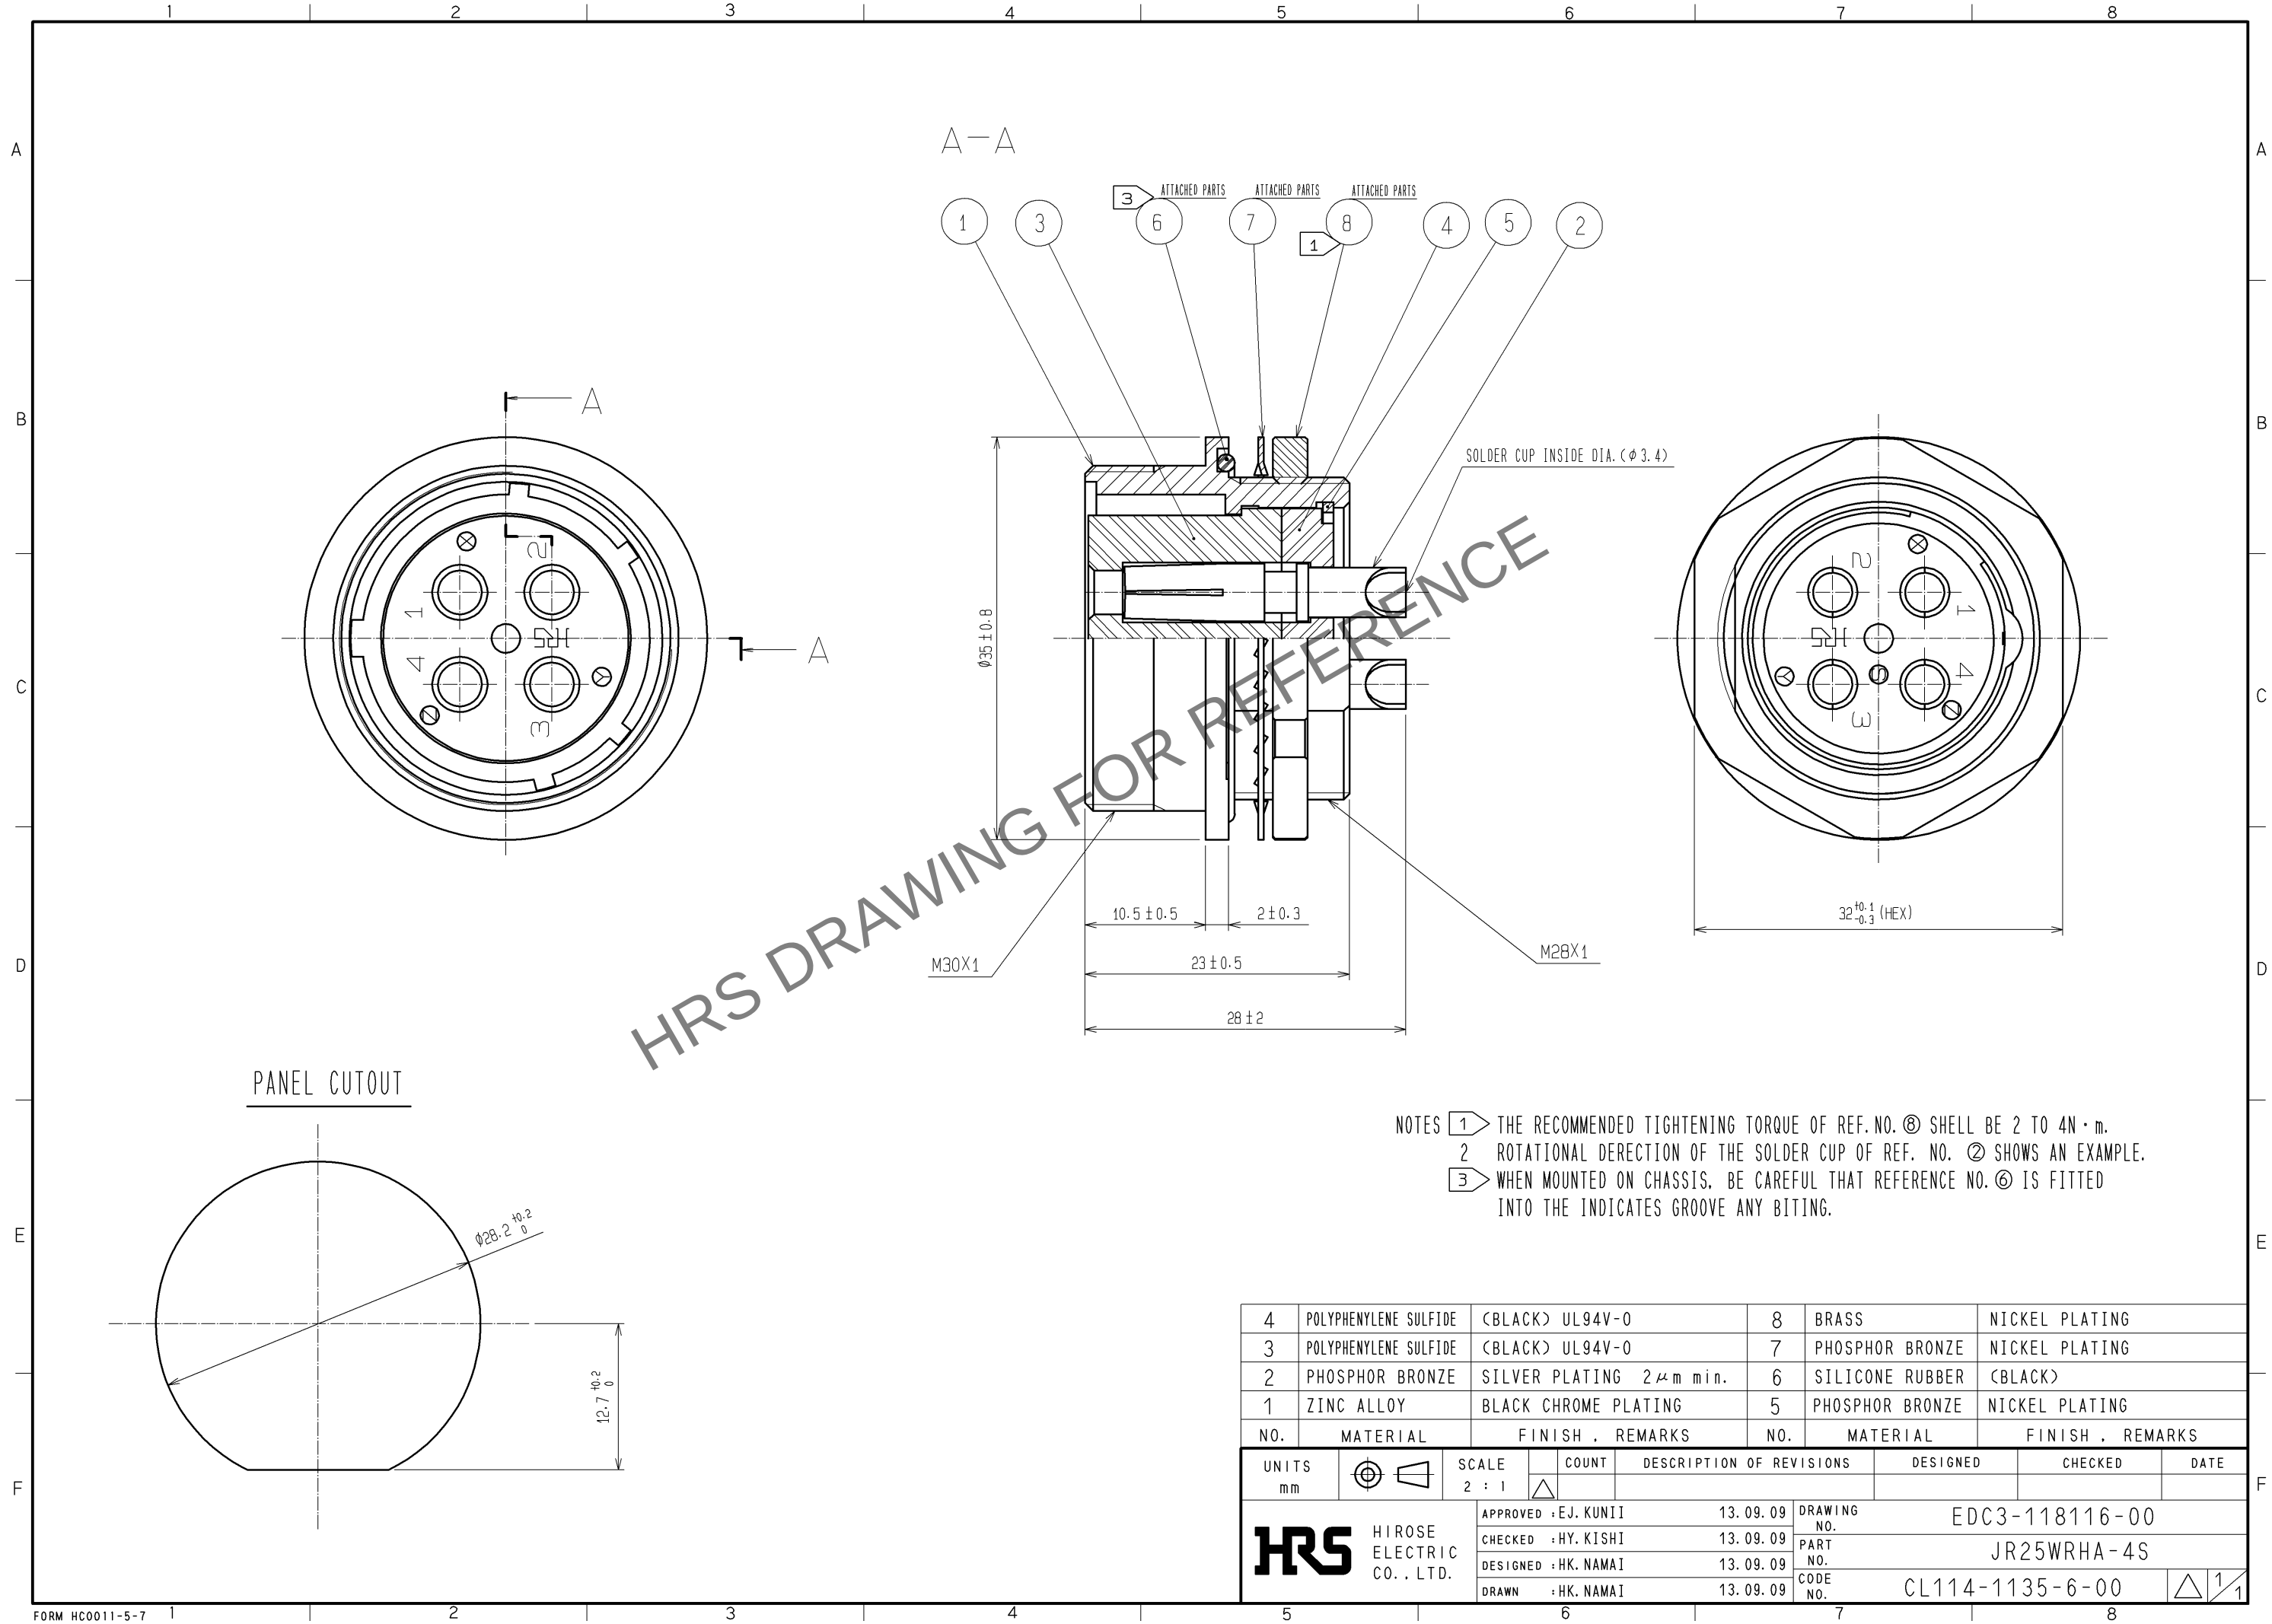


Aug.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTES ① THE RECOMMENDED TIGHTENING TORQUE OF REF.NO. ⑧ SHALL BE 2 TO 4N・m.
② ROTATIONAL DIRECTION OF THE SOLDER CUP OF REF. NO. ② SHOWS AN EXAMPLE.
③ WHEN MOUNTED ON CHASSIS, BE CAREFUL THAT REFERENCE NO. ⑥ IS FITTED INTO THE INDICATES GROOVE ANY BITING.

4	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	8	BRASS	NICKEL PLATING					
3	POLYPHENYLENE SULFIDE	(BLACK) UL94V-0	7	PHOSPHOR BRONZE	NICKEL PLATING					
2	PHOSPHOR BRONZE	SILVER PLATING 2μm min.	6	SILICONE RUBBER	(BLACK)					
1	ZINC ALLOY	BLACK CHROME PLATING	5	PHOSPHOR BRONZE	NICKEL PLATING					
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS					
UNITS mm			SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.				APPROVED : EJ. KUNII		13. 09. 09	DRAWING NO. EDC3-118116-00			
				CHECKED : HY. KISHI		13. 09. 09	PART NO. JR25WRHA-4S			
				DESIGNED : HK. NAMAI		13. 09. 09	CODE NO. CL114-1135-6-00			
				DRAWN : HK. NAMAI		13. 09. 09	 1/1			