

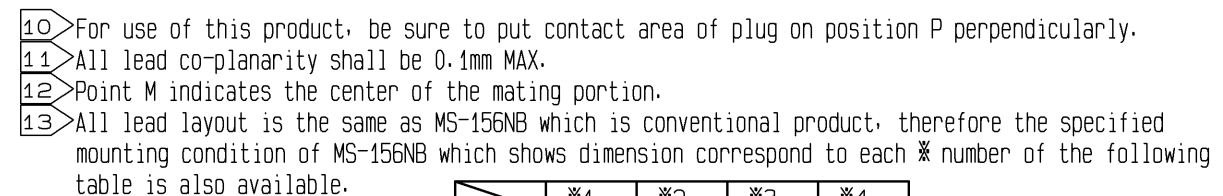


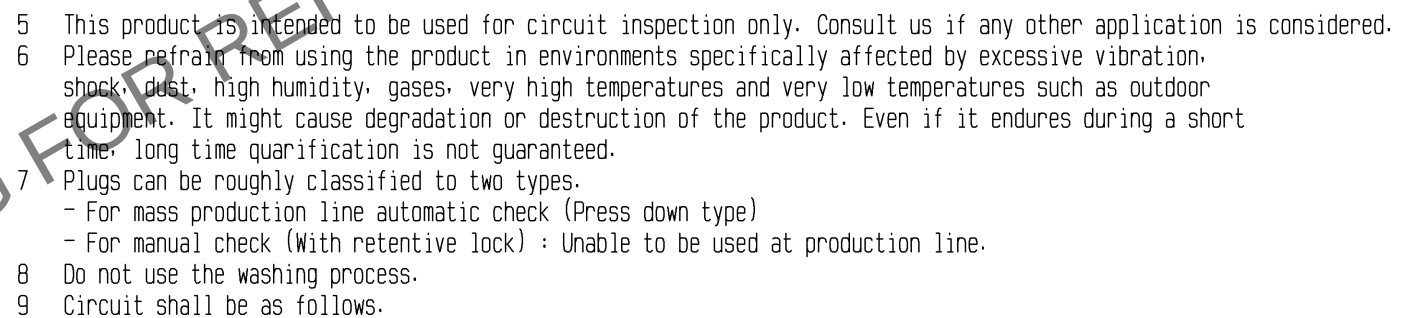

~Recommended Mounting of MS-156HF coaxial switch
on the PCB during the manufacturing process~




3	BERYLLIUM COPPER	SELECTIVE GOLD PLATING		6	PS		
2	6T-NYLON			5	PS		
1	PHOSPHOR BRONZE	GOLD PLATING		4	PHOSPHOR BRONZE	SELECTIVE GOLD PLATING	
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS	

UNITS mm		SCALE 10 : 1		COUNT 2	DESCRIPTION OF REVISIONS DIS-J-000892	DESIGNED AS. KASUGA	CHECKED RZ. KANO	DATE 08. 07. 17

 HIROSE ELECTRIC CO., LTD.	APPROVED : KJ. KAWAMURA	06. 09. 29	DRAWING NO. EDC3-180639-00	
	CHECED : TY. OZAKI	06. 09. 29	PART NO. MS-156HF	
	DESIGNED : DS. YAMAKOSHI	06. 09. 15	CODE NO. CL358-0238-4-00	
	DRAWN : DS. YAMAKOSHI	06. 09. 15	 	


 SPECIFIED STENCIL OPENING
  THICKNESS: 0.1~0.12mm
 (TOLERANCE ±0.03mm)

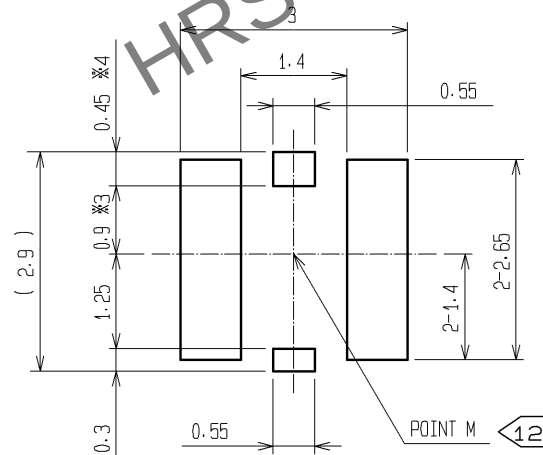


Please comply with the following notes as a request for cooperation to our customers due to the micro precision machinery component.
(We ask all our customers for their understanding of the following notes and their cooperation.)

Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


PACKAGING SPECIFICATION

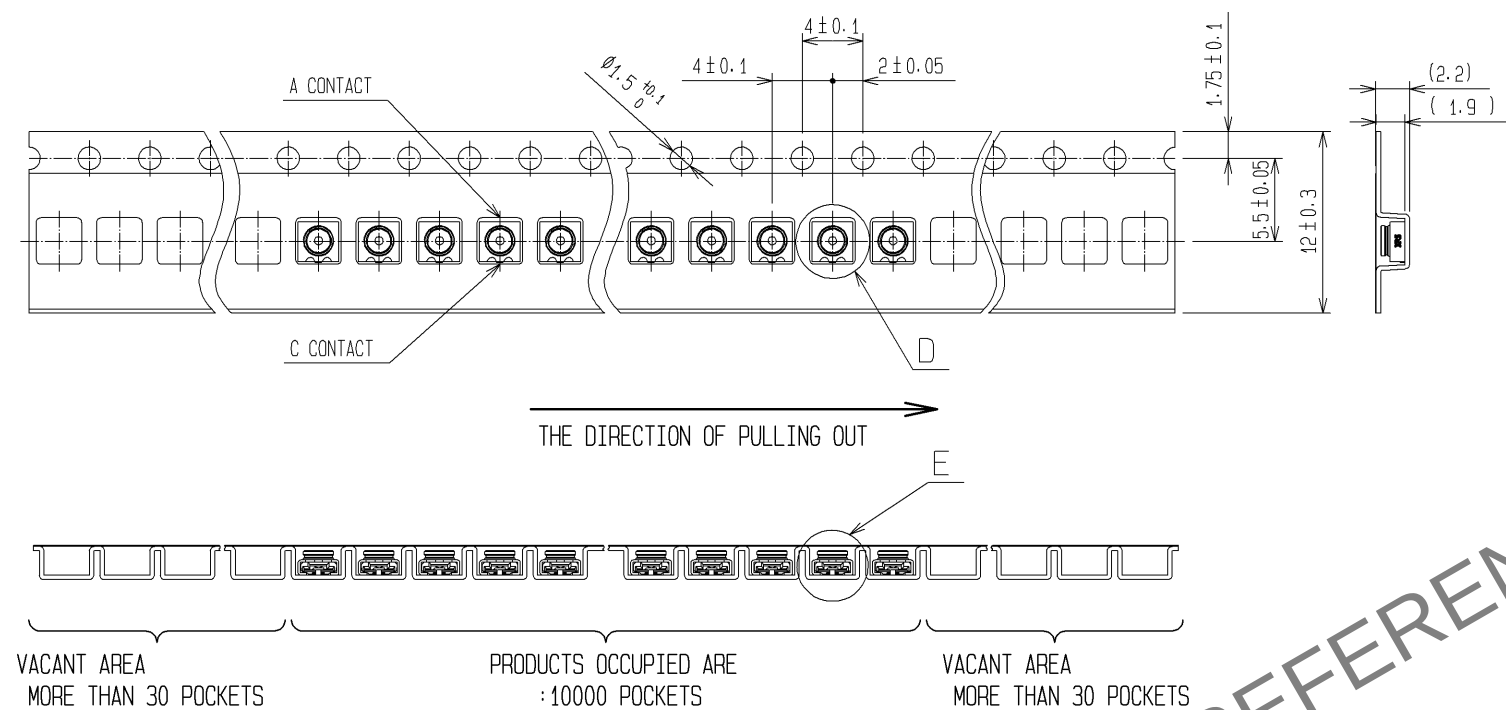


REEL DIMENSIONS(FREE)

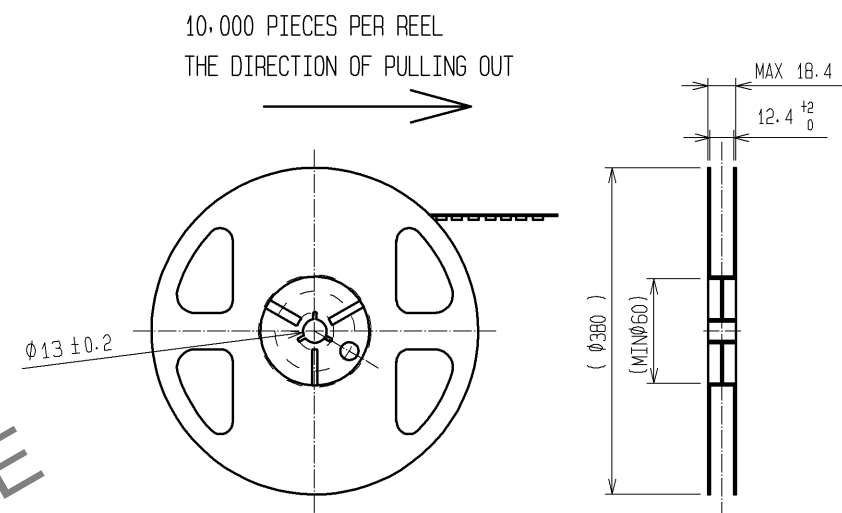

RECOMMENDED REFLOW TEMPERATURE PROFILE

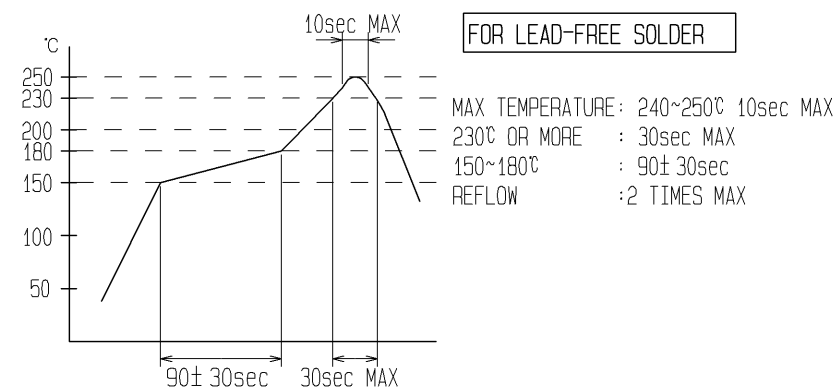

OUTER PACKAGING CASE (FREE)

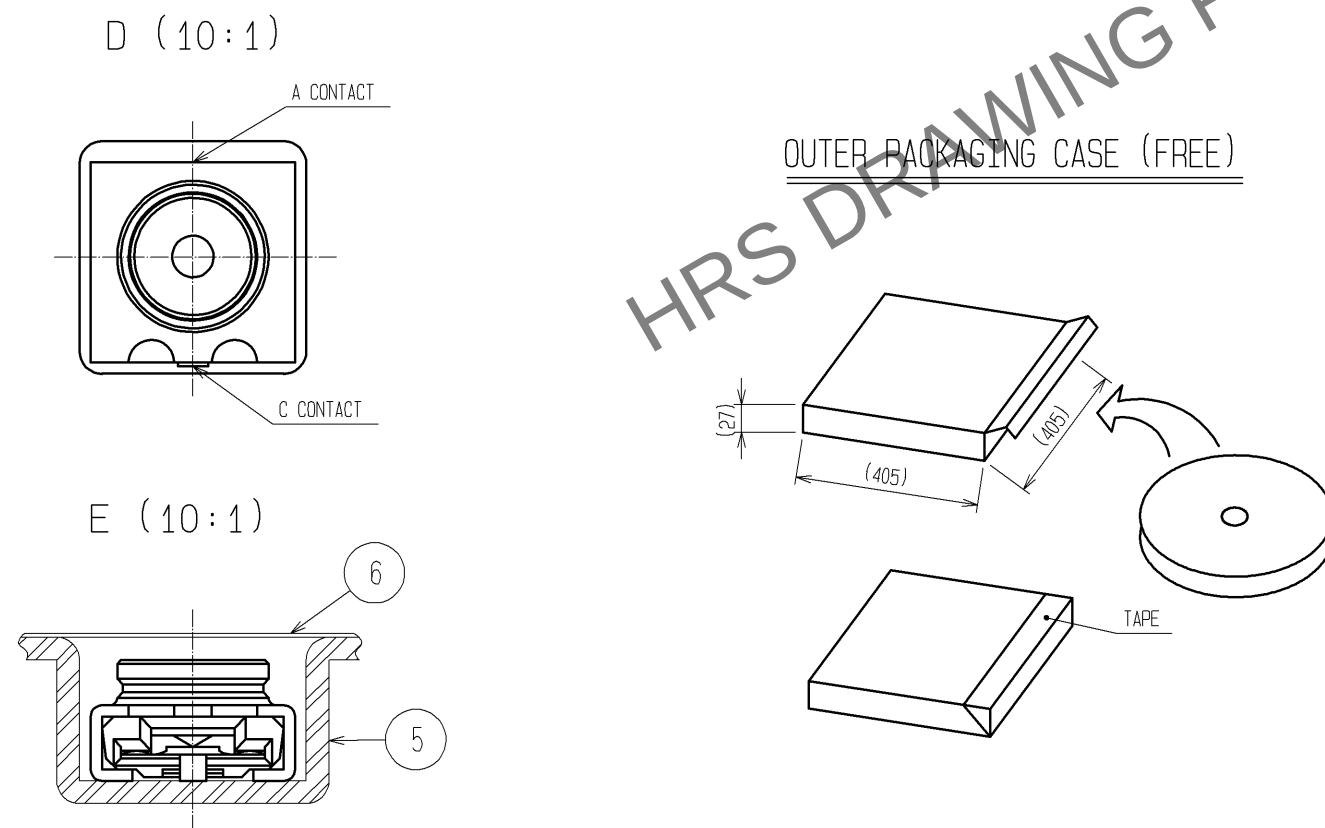

HRS

DRAWING NO.	EDC3-180639-00
PART NO.	MS-156HF
CODE NO.	CL358-0238-4-00

5/2/2