

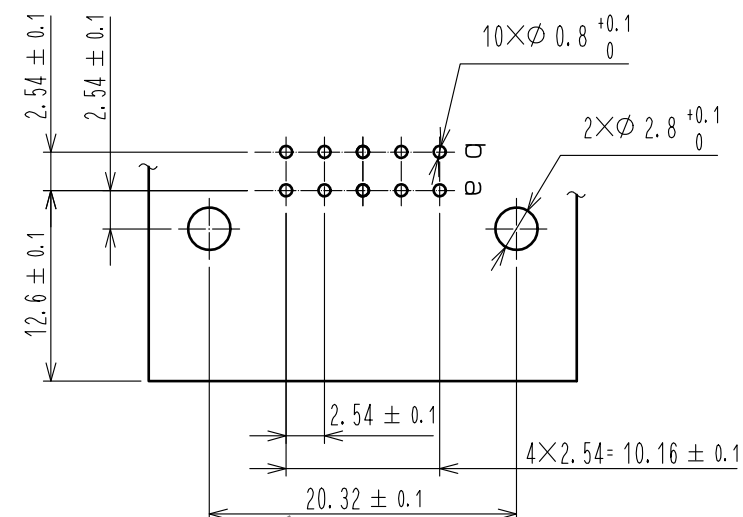
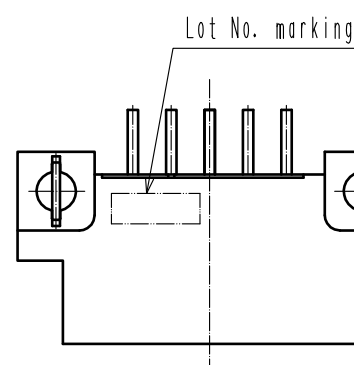
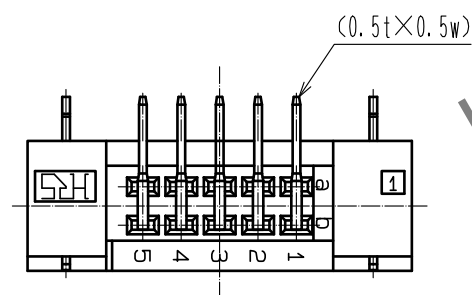


Nov.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

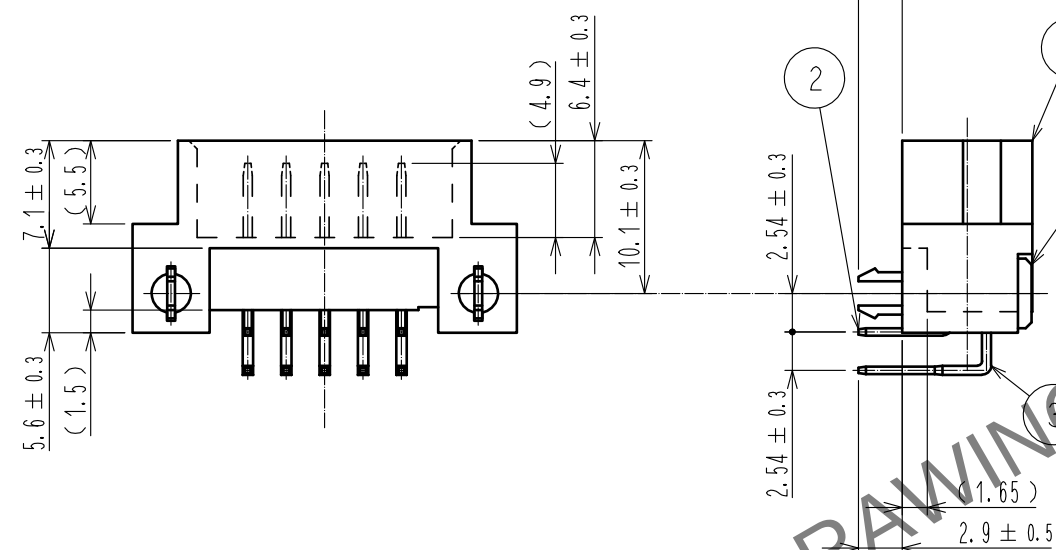

Recommended PC board hole pattern (t=1.6 ± 0.1)

Note 1 UL (File No. E52653)

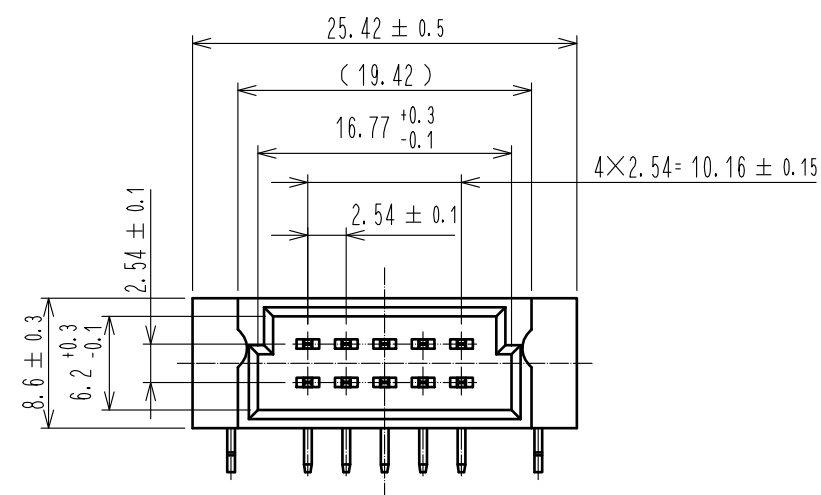

2, 3	BRASS	(CONTACT AREA) Ni2.5 μm+Au0.1 μm					
		(DIP AREA) Ni2.5 μm+Sn2 μm					
1	PBT	BEIGE, UL94V-0		4	PHOSPHOR BRONZE	Ni1 μm+Sn1 μm	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00017716		DESIGNED YU. NAKADA	CHECKED HT. YAMAGUCHI
HIROSE ELECTRIC CO., LTD.		APPROVED	• KI. AKIYAMA	20090220	DRAWING NO. EDC-019812-71-02		
		CHECKED	• SI. TOMIOKA	20090220	PART NO. PCN12EA-10P-2.54DS(71)		
		DESIGNED	• NH. SUGITA	20090220	CODE NO. CL0583-2028-9-71		
		DRAWN	• CR. TAKESHIMA	20090219			
							1/1