

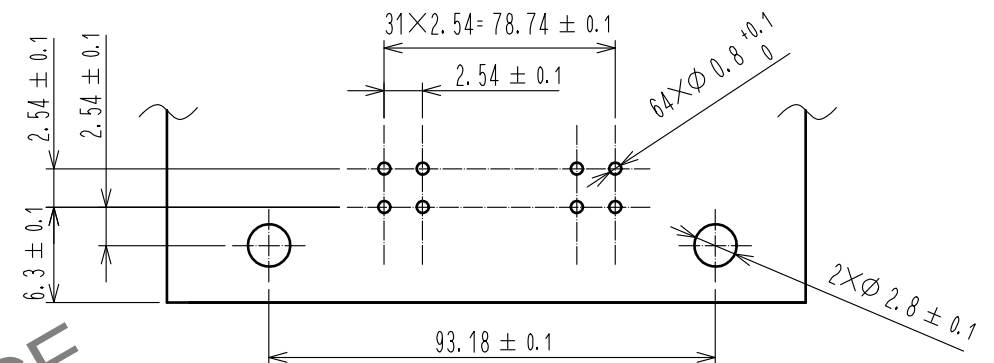
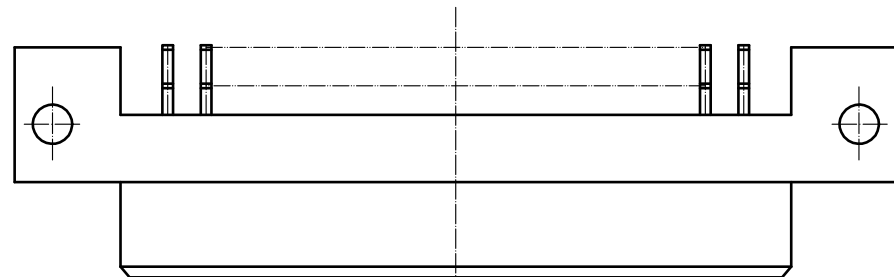


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

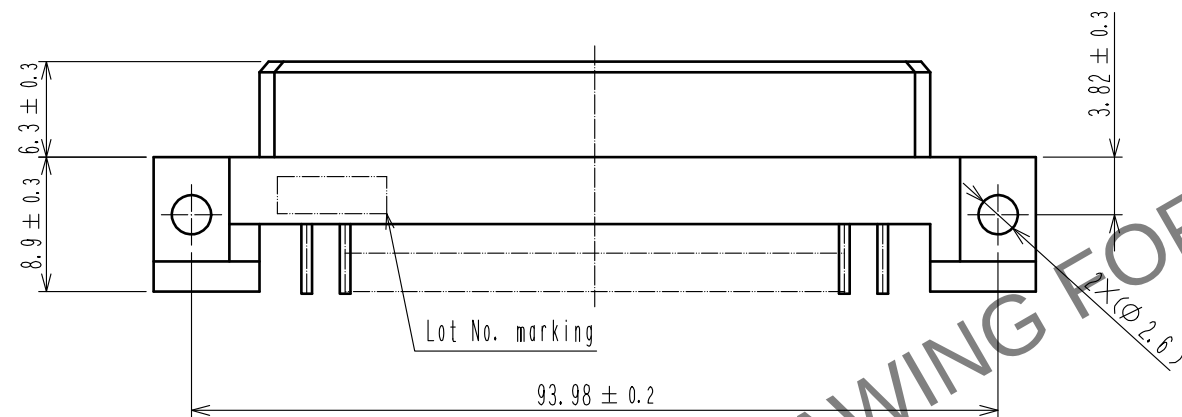

Recommended P.C.B hole pattern

△ Note 1 UL(File No. E52653)

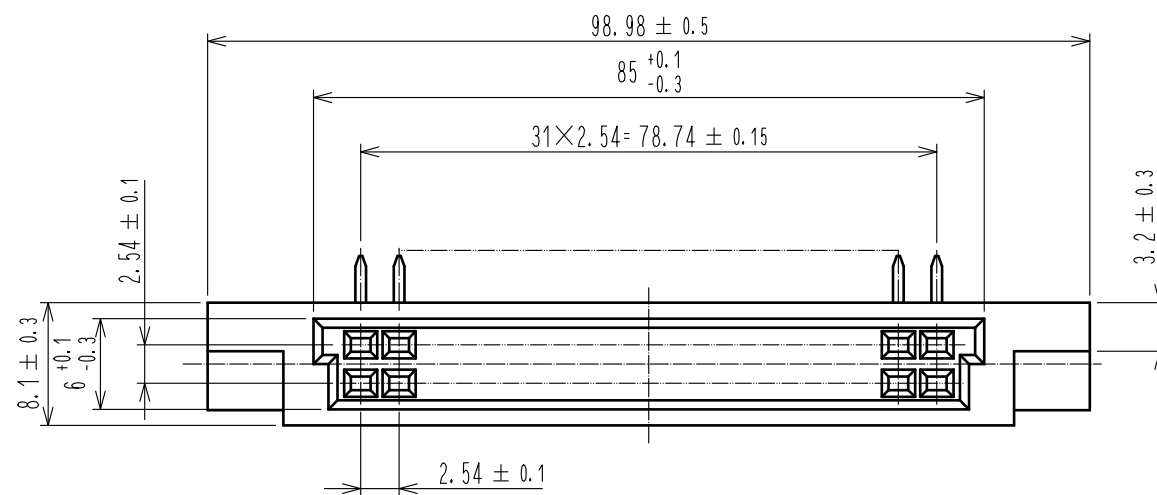

△ Change drawing frame format.

1	PBT	BEIGE UL94V-0	2, 3	COPPER ALLOY	CONTACT AREA : Ni1μm+Au0.1μm
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	DIP AREA : Ni1μm+Sn2μm
UNITS mm		SCALE 2 : 1	COUNT △ 2	DESCRIPTION OF REVISIONS DIS-F-00017850	DESIGNED YU. NAKADA
HIROSE ELECTRIC CO., LTD.		APPROVED : KI. AKIYAMA	20060510	DRAWING NO.	EDC-020273-71-01
		CHECKED : SI. TOMIOKA	20060510	PART NO.	PCN13-64S-2.54DS(71)
		DESIGNED : HM. SAITO	20060510	CODE NO.	CL0583-3037-5-71
		DRAWN : HM. SAITO	20060510		
					1/1