
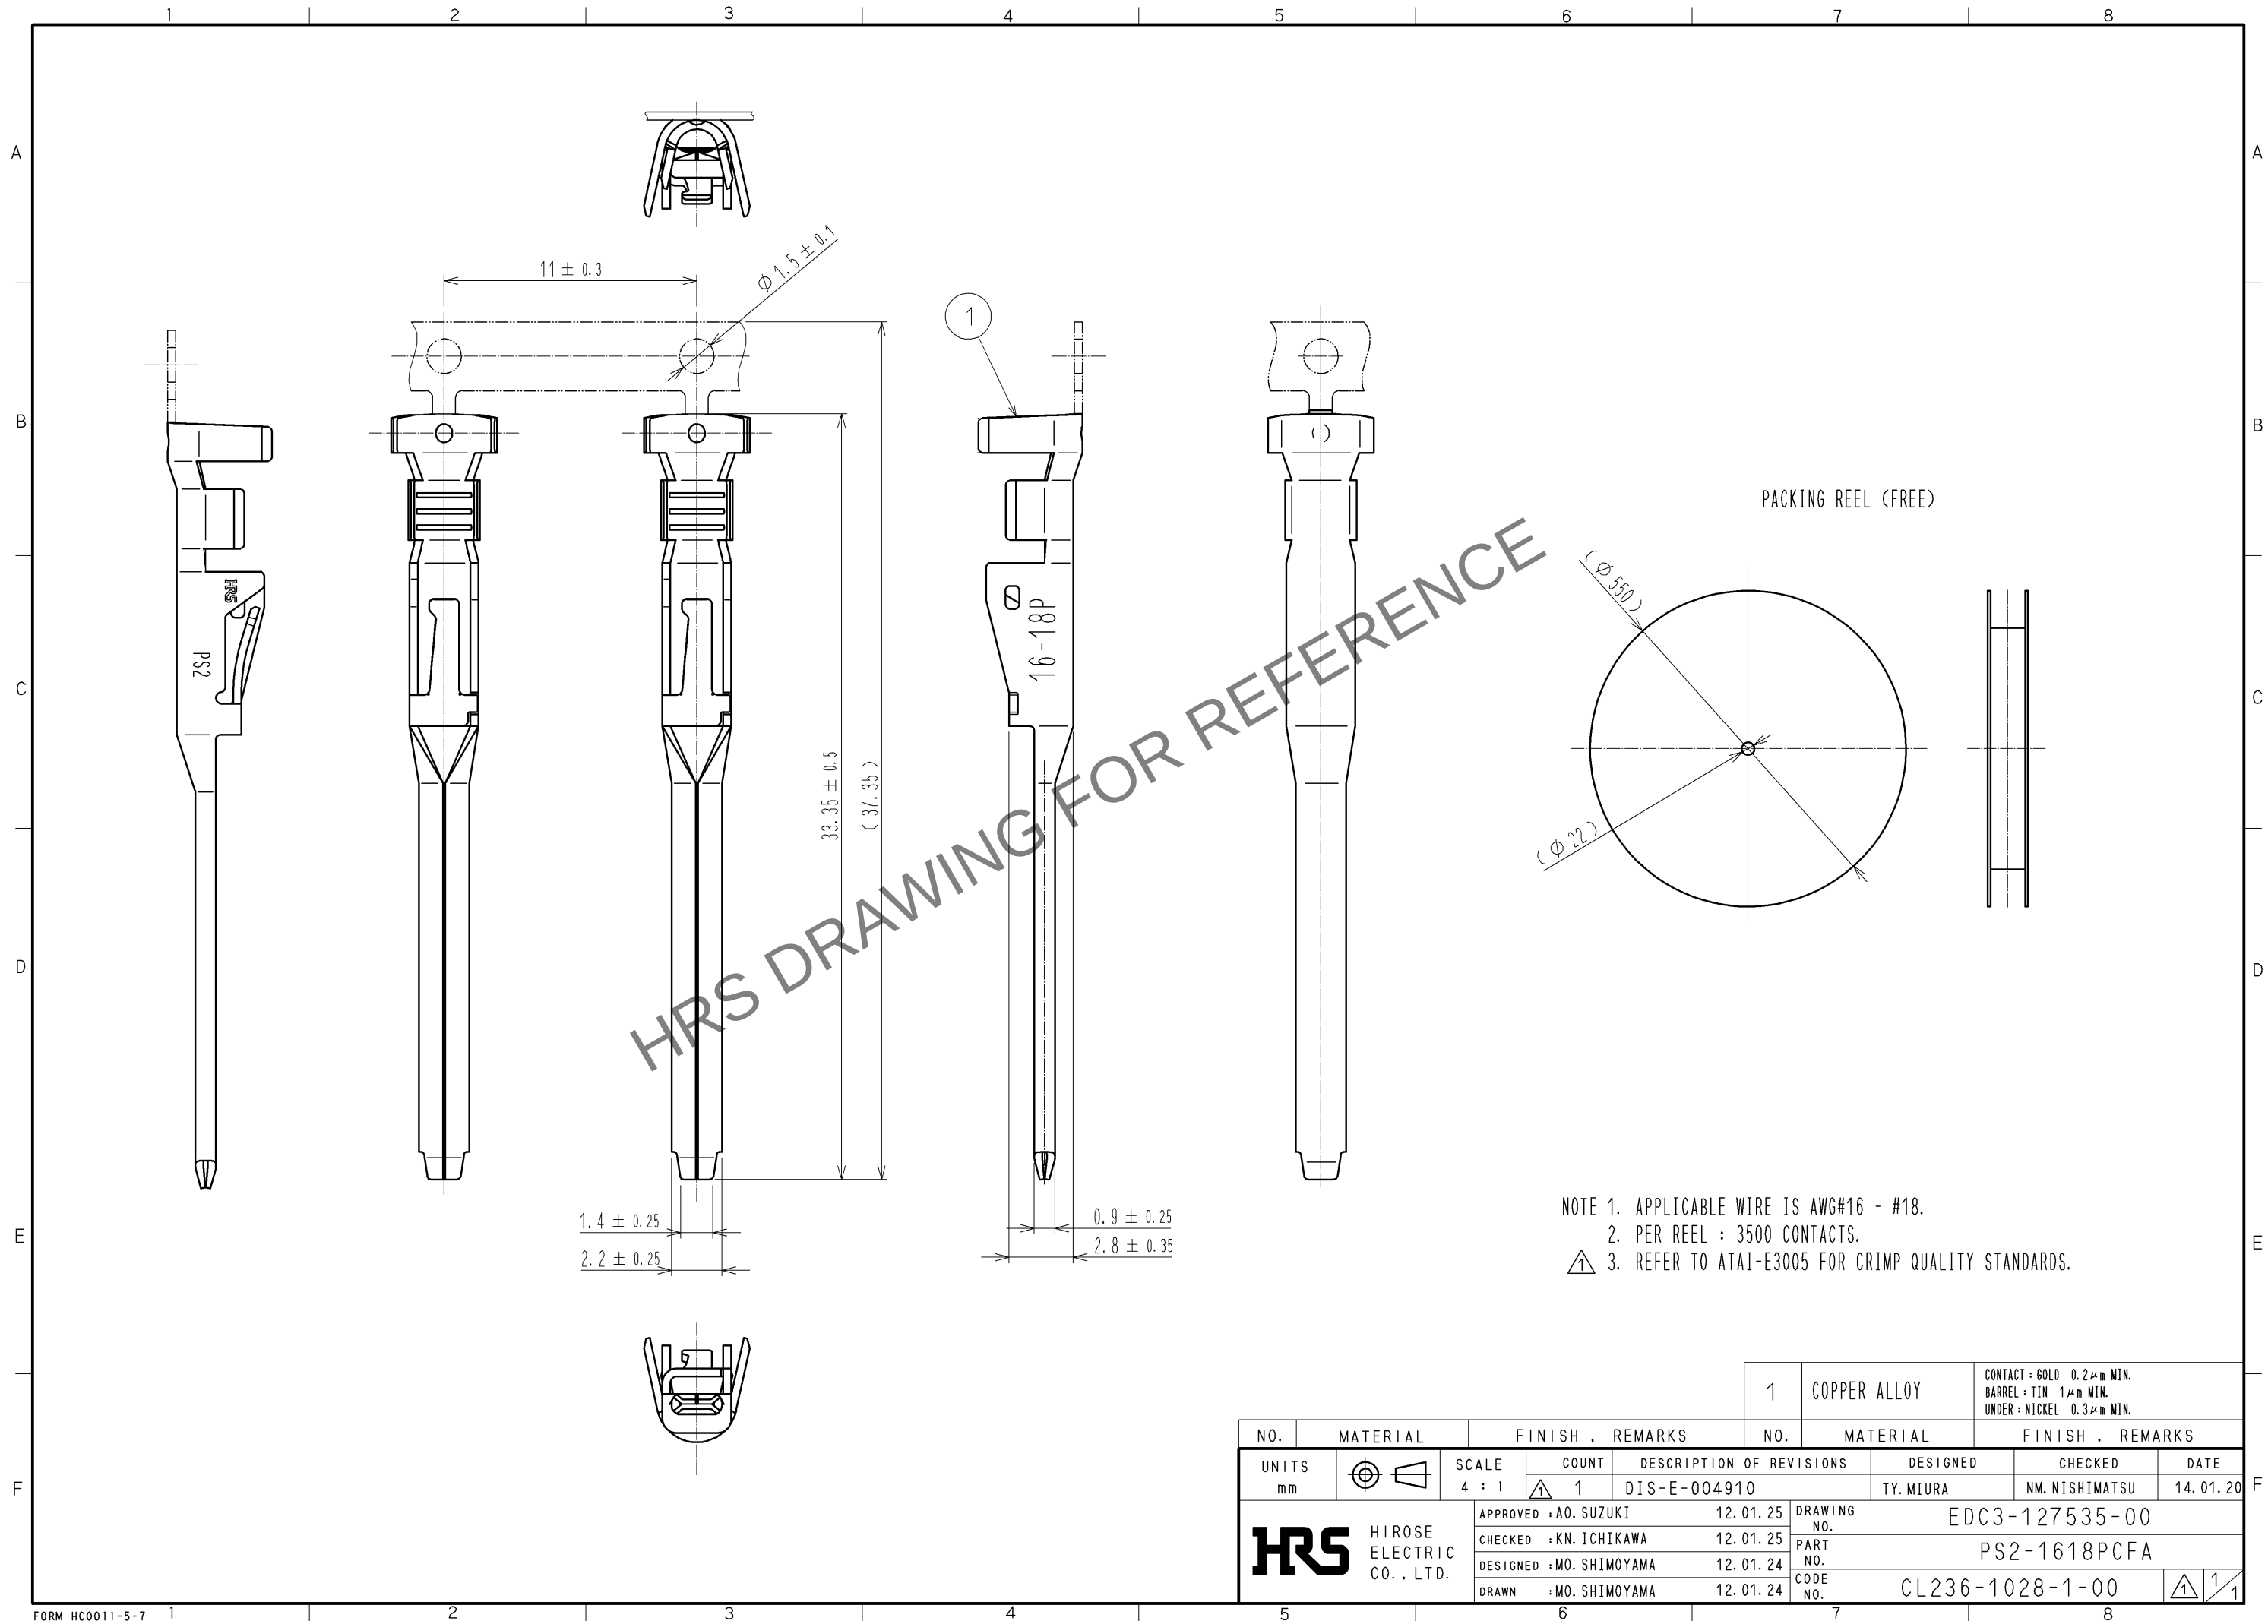


Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTE 1. APPLICABLE WIRE IS AWG#16 - #18.
2. PER REEL : 3500 CONTACTS.
3. REFER TO ATAI-E3005 FOR CRIMP QUALITY STANDARDS.

				1	COPPER ALLOY		CONTACT : GOLD 0.2μm MIN. BARREL : TIN 1μm MIN. UNDER : NICKEL 0.3μm MIN.				
NO.	MATERIAL		FINISH , REMARKS			NO.	MATERIAL		FINISH , REMARKS		
UNITS mm		SCALE 4 : 1	COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED		DATE
				1	DIS-E-004910		TY. MIURA		NM. NISHIMATSU		14. 01. 20
 HIROSE ELECTRIC CO., LTD.			APPROVED : AO. SUZUKI		12. 01. 25		DRAWING NO.		EDC3-127535-00		
			CHECKED : KN. ICHIKAWA		12. 01. 25		PART NO.		PS2-1618PCFA		
			DESIGNED : MO. SHIMOYAMA		12. 01. 24		CODE NO.		CL236-1028-1-00		
			DRAWN : MO. SHIMOYAMA		12. 01. 24				 1		