

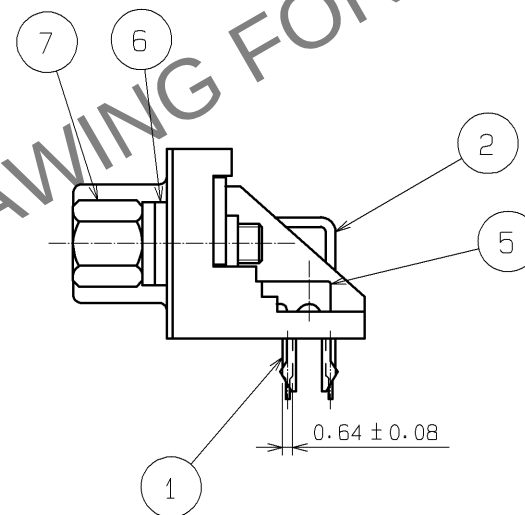
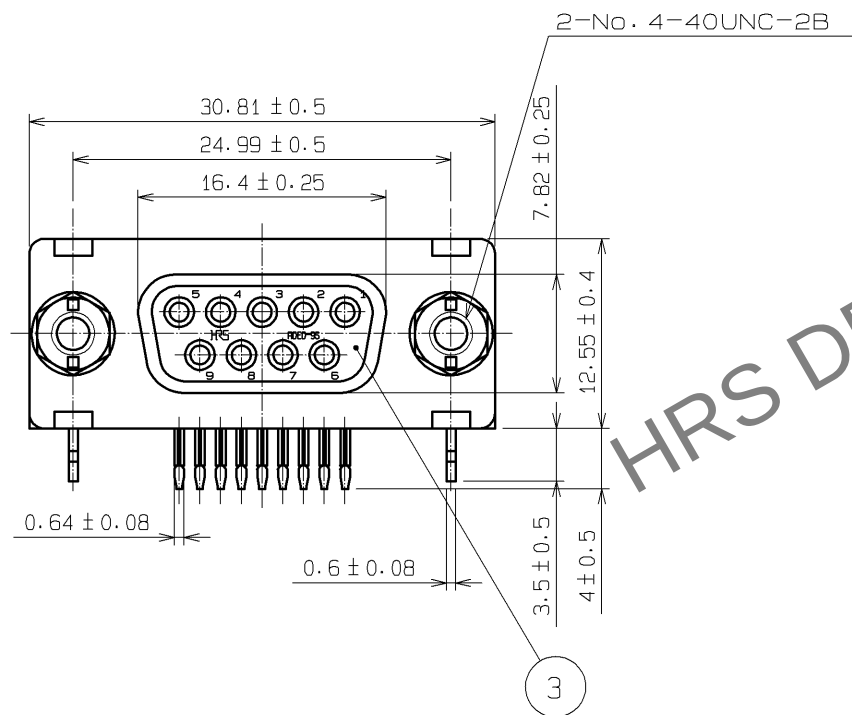
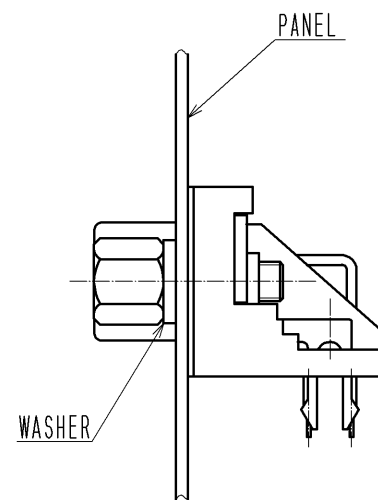


1 CONNECTOR MOUNTED CONDITION

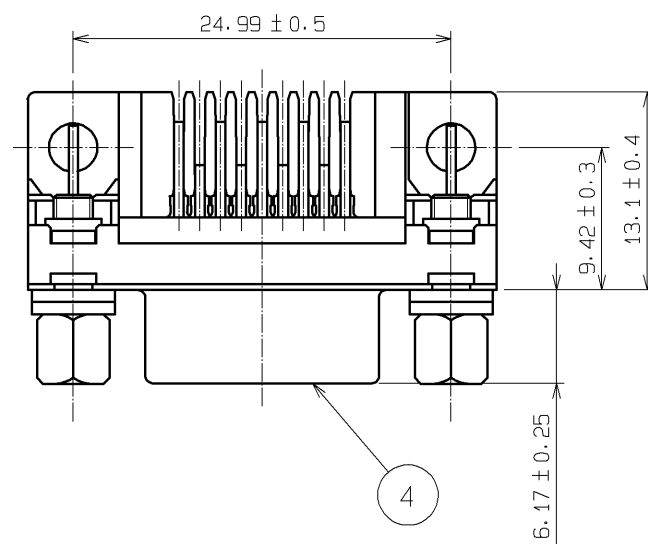

2 RECOMMENDED MOUNTING HOLE PATTERN

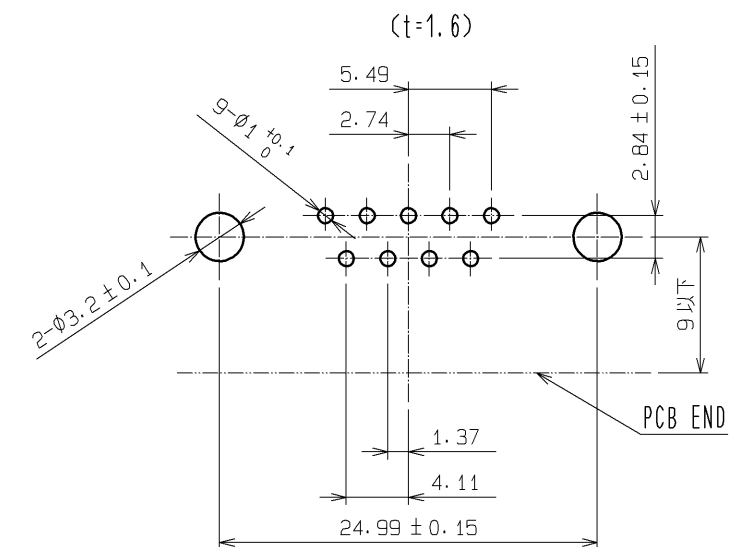

NOTES 1 REMOVE ONE WASHER FOR 0.8-1.2 OF PANEL THICKNESS.
REMOVE TWO WASHERS FOR 1.6 OF PANEL THICKNESS.

2 PLEASE KEEP THE TOLERANCE TO LESS THAN ± 0.1
FOR THE DIMENSIONS WITHOUT TOLERANCE.

3 CONTACT AREA: GOLD PLATING $0.2 \mu\text{m}$ MIN
TERMINAL AREA: GOLD PLATING $0.03 \mu\text{m}$ MIN
UNDERPLATING: NICKEL PLATING $2 \mu\text{m}$ MIN

4	STEEL	OVER: NICKEL PLATING $2 \mu\text{m}$ MIN UNDER: COPPER PLATING $5 \mu\text{m}$ MIN	7	STEEL	OVER: NICKEL PLATING $2 \mu\text{m}$ MIN UNDER: COPPER PLATING $1 \mu\text{m}$ MIN
3	PBT	BLACK UL94V-0	6	STEEL	OVER: NICKEL PLATING $2 \mu\text{m}$ MIN UNDER: COPPER PLATING $3 \mu\text{m}$ MIN
2	PHOSPHOR BRONZE	3			OVER: TIN PLATING $3 \mu\text{m}$ MIN UNDER: NICKEL PLATING $3 \mu\text{m}$ MIN
1	PHOSPHOR BRONZE	3	5	PHOSPHOR BRONZE	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
					CHECKED
					DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU	12. 01. 11	DRAWING NO.	EDC3-021516-01
		CHECKED : TA. ASO	12. 01. 11	PART NO.	RDED-9SE-LNA(4-40)(55)
		DESIGNED : KO. KAWAMURA	12. 01. 11	CODE NO.	CL211-0466-7-55
		DRAWN : RO. IIZUKA	12. 01. 10		