
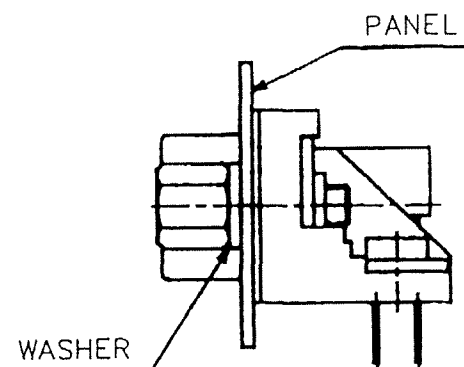
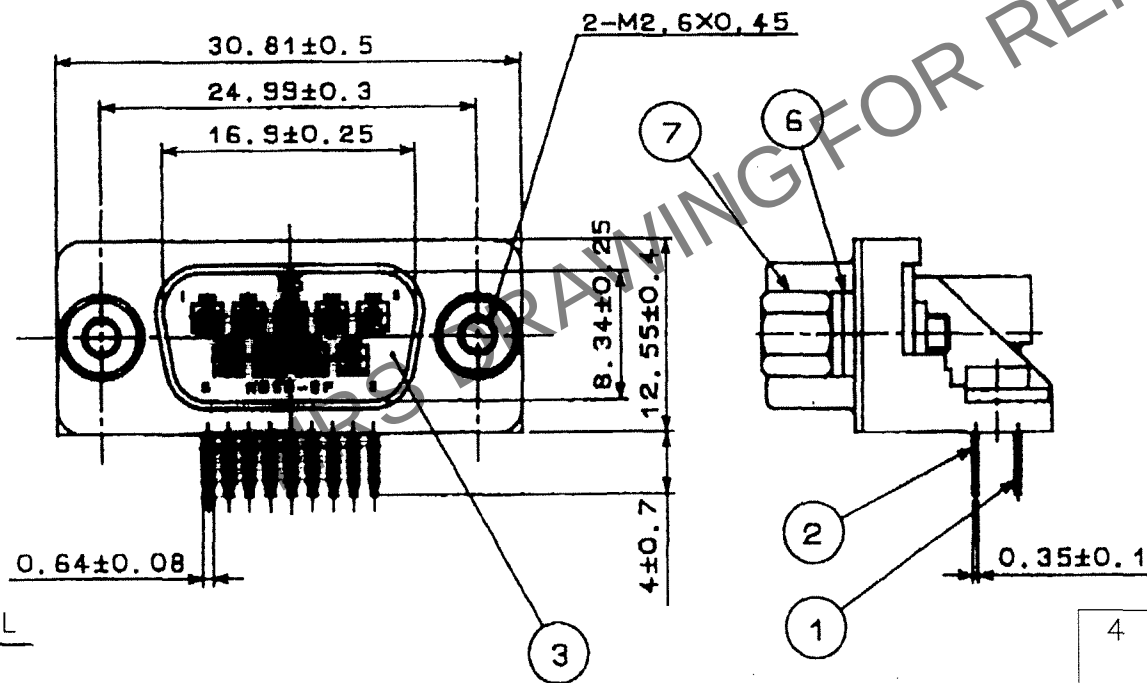


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

TO
Q


A
B
C
D
E
F

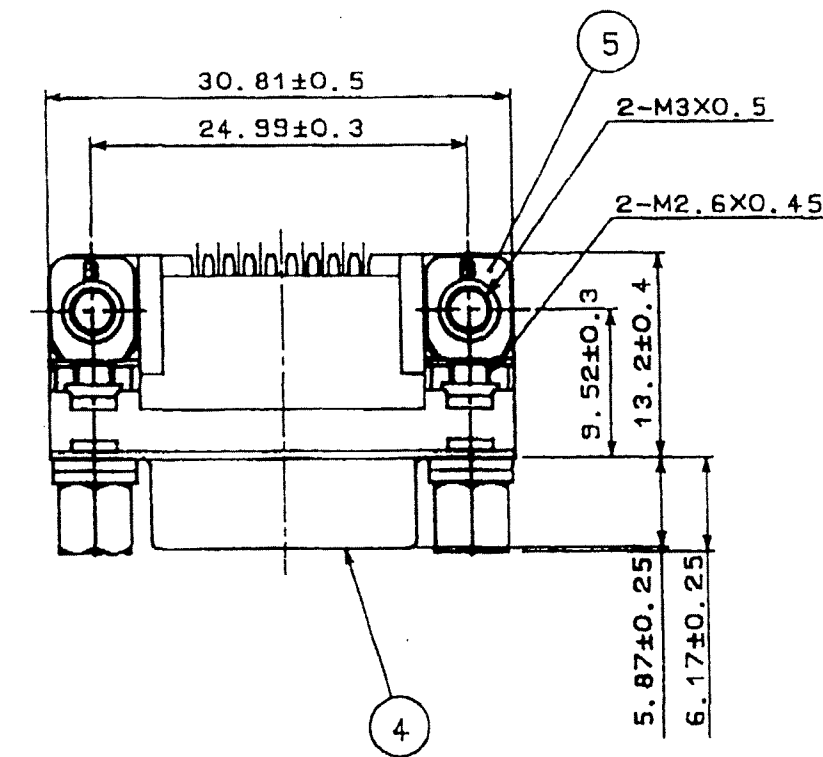

PATTERN OF MOUNTING CONNECTOR ON PCB

REMOVE ONE WASHER FOR 0.8-1.2 OF
PANEL THICKNESS. REMOVE TWO WASHERS
FOR 1.6 OF PANEL THICKNESS.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
5	DIS-E-001184	Y.S	Y.E	07.02.22					

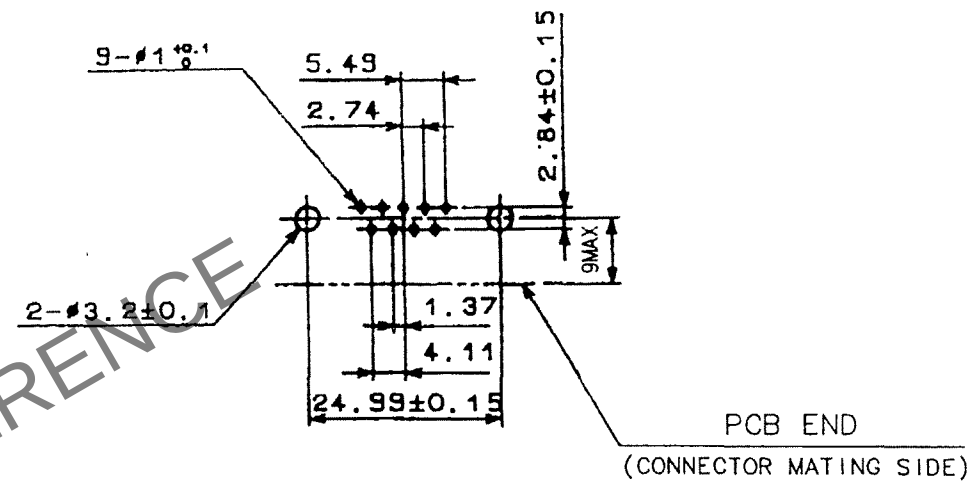

NOTE. PLEASE KEEP THE TOLERANCE TO LESS THAN ±0.1
FOR THE DIMENSIONS WITHOUT TOLERANCE.

RECOMMENDED PC BOARD HOLE PATTERN
(SCALE 1:1)

4	STEEL	NICKEL PLATING 1μ m UNDER: COPPER PLATING 5μ m	7	STEEL	NICKEL PLATING 2μ m UNDER: COPPER PLATING 1μ m
3	PBT	UL94V-0 (BLACK)	6	STEEL	NICKEL PLATING 2μ m UNDER: COPPER PLATING 3μ m
1~2	PHOSPHOR BRONZE	CONTACT: GOLD PLATING 0.2μ m DIP: GOLD PLATING 0.03μ m UNDER: NICKEL PLATING 2μ m	5	STEEL	NICKEL PLATING 2μ m UNDER: COPPER PLATING 1μ m
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL		DRAWN T.KAMEYA 03.07.31	DESIGNED T.KAMEYA 03.07.31	CHECKED Y.ENAMI 03.08.04	APPROVED H.MIWA 03.08.05
SCALE 2 : 1 UNITS mm		DRAWING NO. EDC3-021864-02 HRS HIROSE ELECTRIC CO., LTD		PART NO. RDED-9P-LNA(55) CODE NO. CL211-0477-3-55	

A
B
C
D
E
F