Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

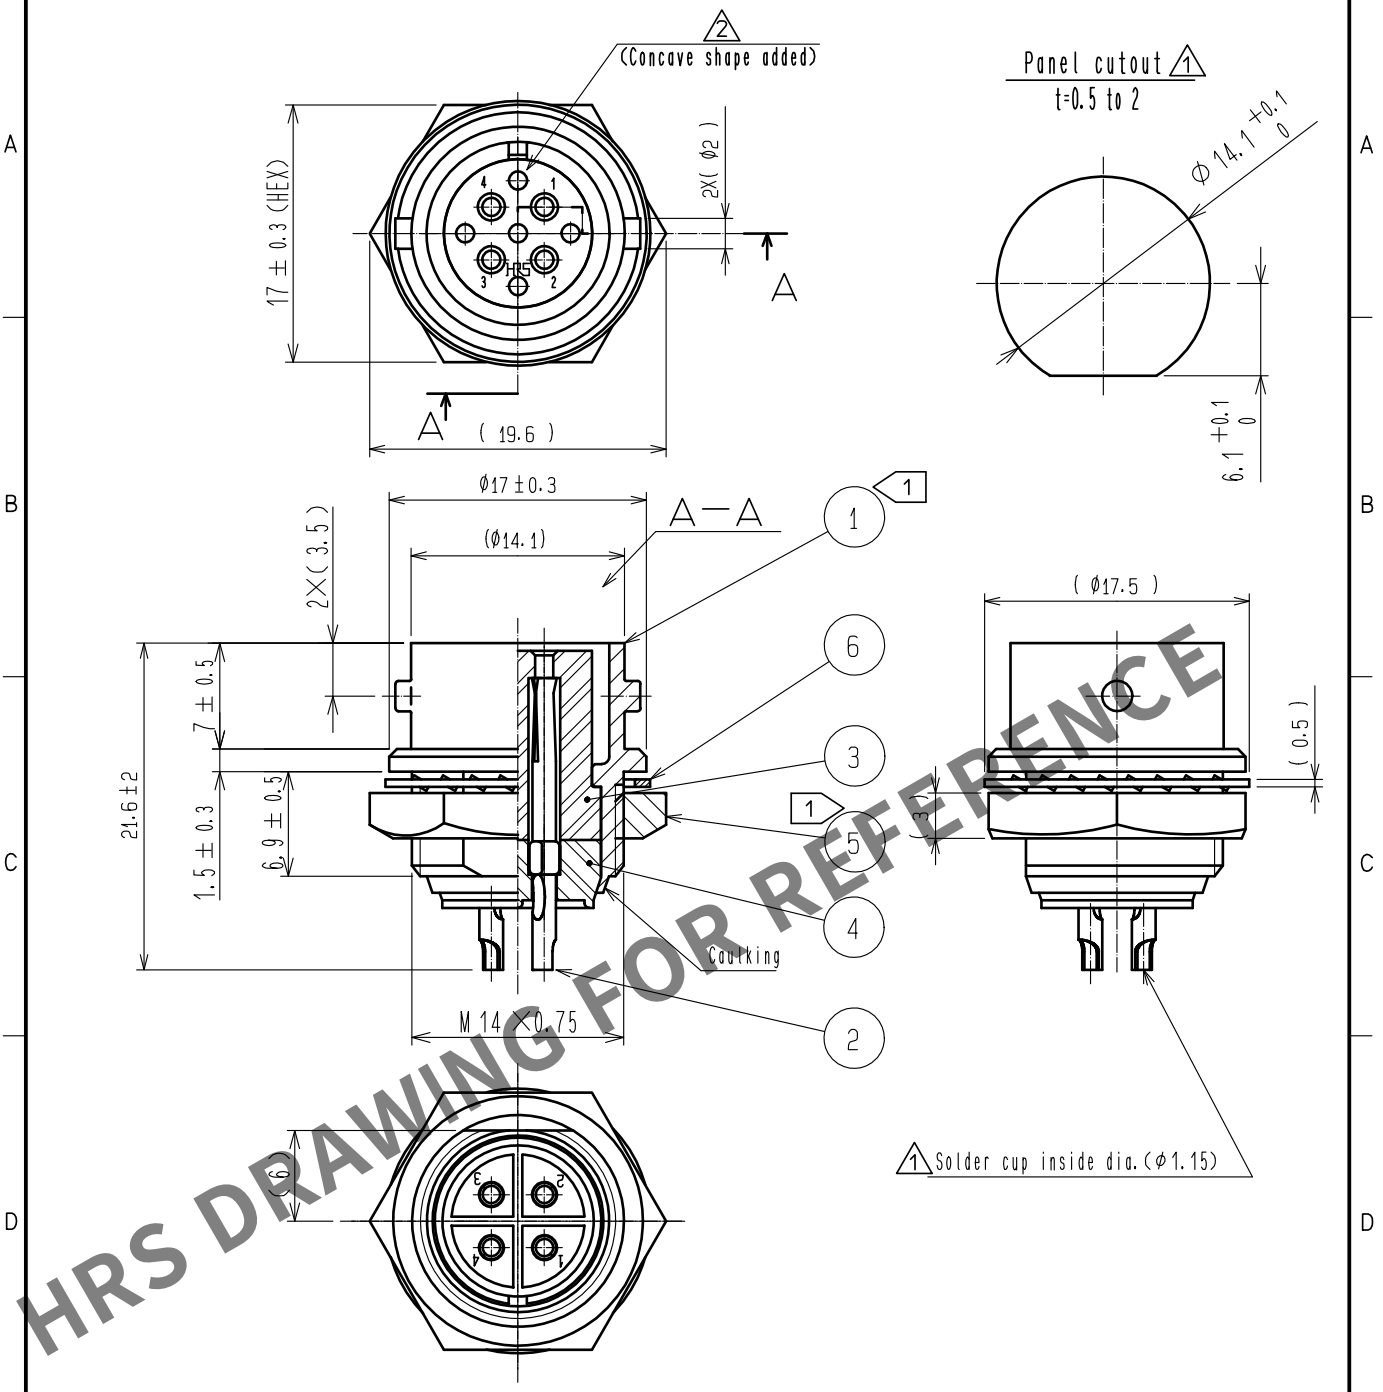


HRS DRAWING FOR REFERENCE

Note 1 The tightening torque of Ref. No. ⑤ : 2 to 2.5 N・m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M14×0.75) of Ref. No. ① in order to prevent loosening.

| NO. | MATERIAL | FINISH . REMARKS | NO. | MATERIAL | FINISH . REMARKS |
|---|---|---|---|---|---|
| 3 | Polyphenylene sulfide | (Black) | 6 | Phosphor bronze | Nickel plating |
| 2 | Copper alloy | Silver plating 5μm min. | 5 | Brass | Nickel plating |
| 1 | Zinc alloy | Matte finish nickel plated | 4 | Polyphenylene sulfide | (Black) |

| UNITS | SCALE | | COUNT | DESCRIPTION OF REVISIONS | DESIGNED | CHECKED | DATE |
|---|---|---|---|---|---|---|---|
| mm | 2 : 1 | 2 | 1 | DIS-C-00016513 | TY. SUZUKI | HY. KOBAYASHI | 20231113 |

HIROSE ELECTRIC CO., LTD.

| | | | |
|---|---|---|---|
| APPROVED | TP. KOMATSU | 20230419 | DRAWING NO. EDC-006764-81-00 |
| CHECKED | TP. KOMATSU | 20230419 | PART NO. RM12BRD-4S(81) |
| DESIGNED | HT. ZENBA | 20230419 | CODE NO. CL0109-0611-0-81 |
| DRAWN | KR. SUZUKI | 20230419 | 2 1/1 |