


Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

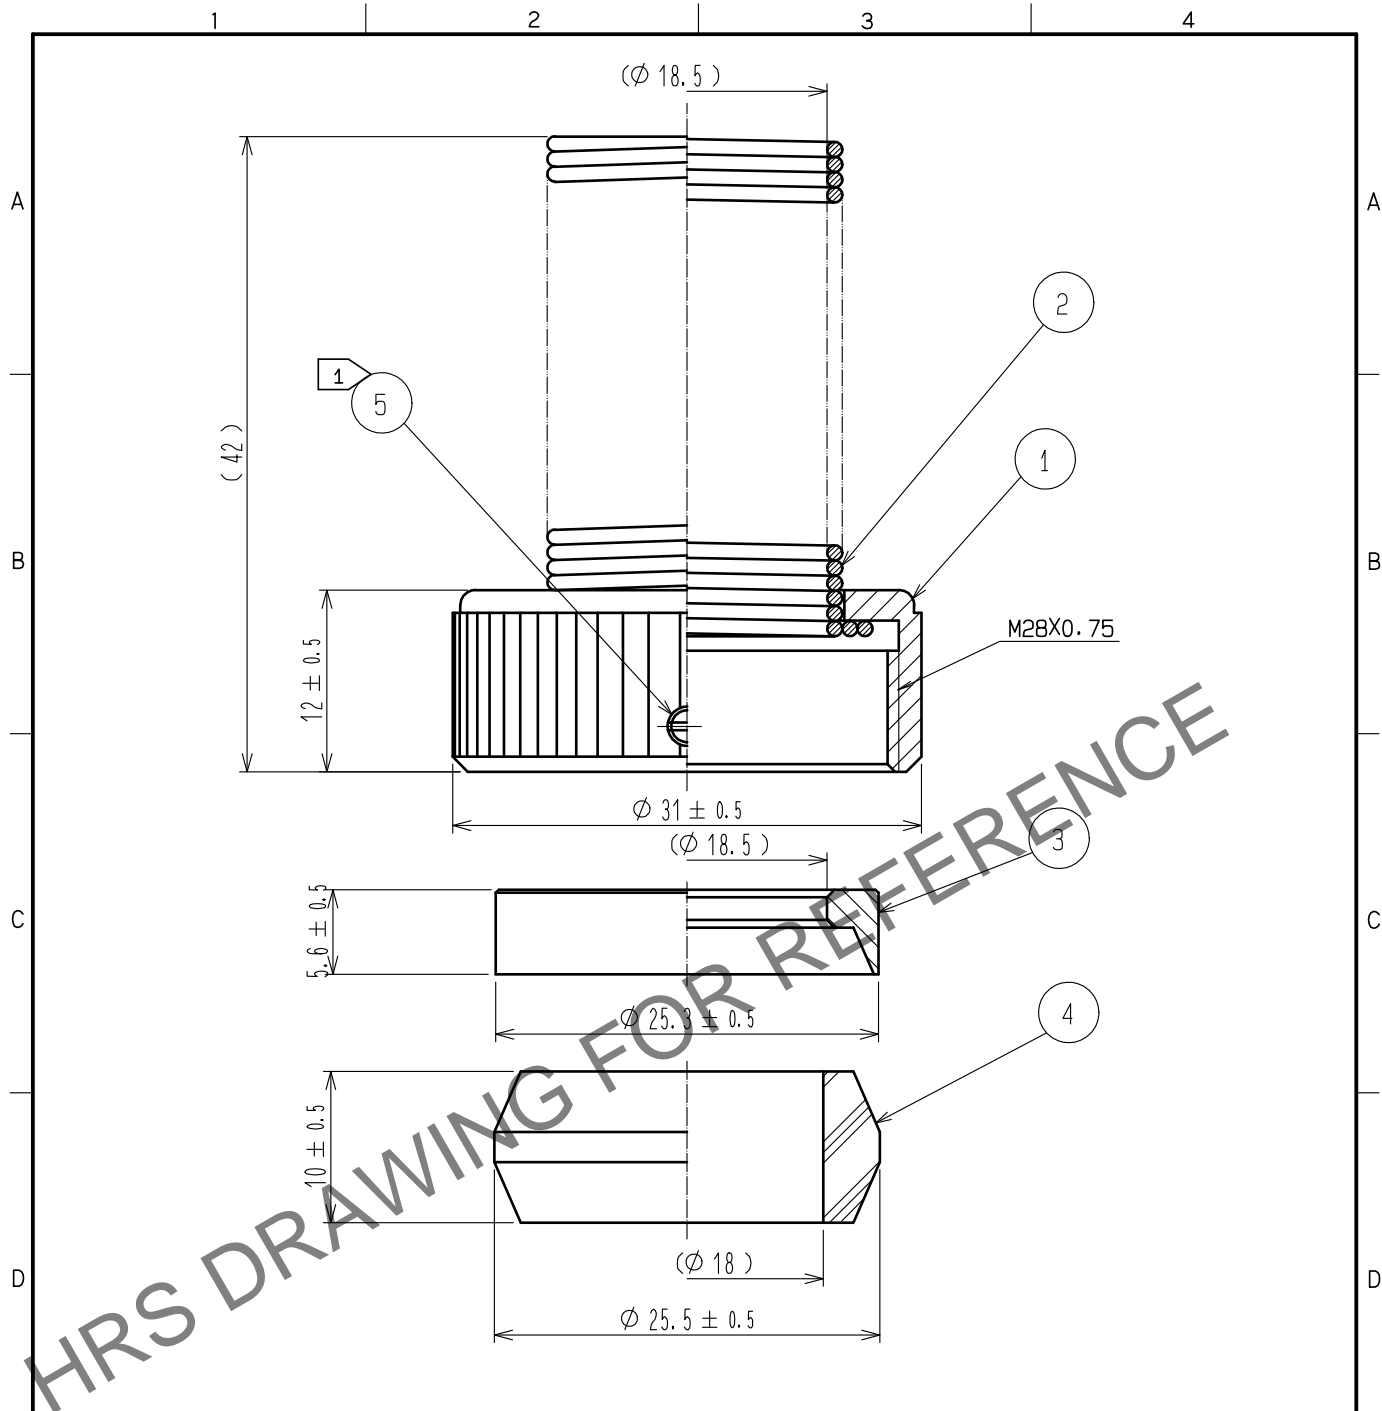

- Notes
- 1 The recommended crimp torque of ref.No. ⑤ shall be 0.15 to 0.2N·m.  
LOCTITE 263, HENKEL JAPAN or equivalent is recommended to prevent ref. No. ⑤ from loosening.
  - 2 Applicable cable :  $\phi 18 \pm 0.3$
  - 3 Assemble with applicable connector : RM31WTP-\*\*(71)  
\*\* shows number of contact, and male or female of connector.
  - 4 The cable pull and twisting strength(, waterproof tightness) and other characteristics may differ, depending on the cable structure, please confirm before the use.

3	Brass	Nickel plating			
2	Phosphor bronze	Nickel plating	5	Brass	Nickel plating
1	Brass	Nickel plating	4	Chloroprene rubber	(Black)
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
					CHECKED
					DATE
HIROSE ELECTRIC CO., LTD.		APPROVED	HY. KOBAYASHI	16.01.25	DRAWING NO.
		CHECKED	HY. KOBAYASHI	16.01.25	PART NO.
		DESIGNED	HY. KISHI	16.01.25	CODE NO.
		DRAWN	HY. KISHI	16.01.25	
EDC-110126-71-00					1/1
RM31WTP-CP(18)(71)					
CL109-1578-1-71					