
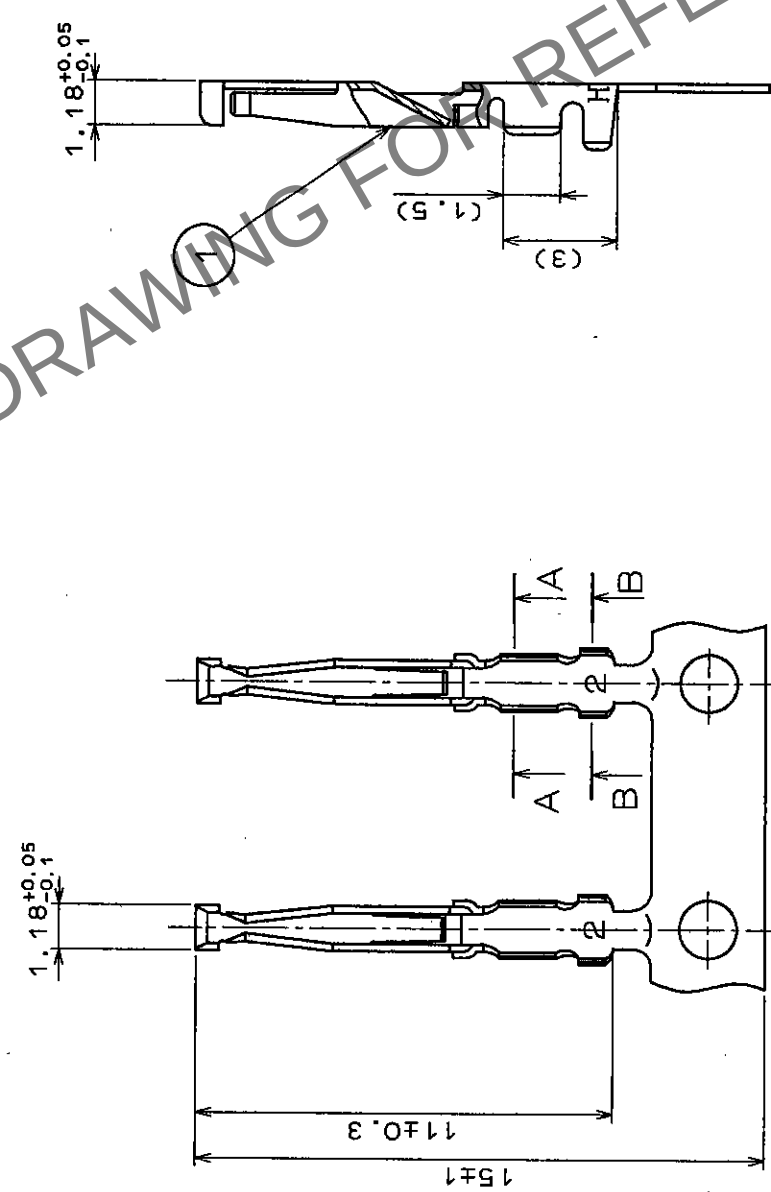


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1				11.11.11	1				11.11.11
1				11.11.11	1				11.11.11
1				11.11.11	1				11.11.11

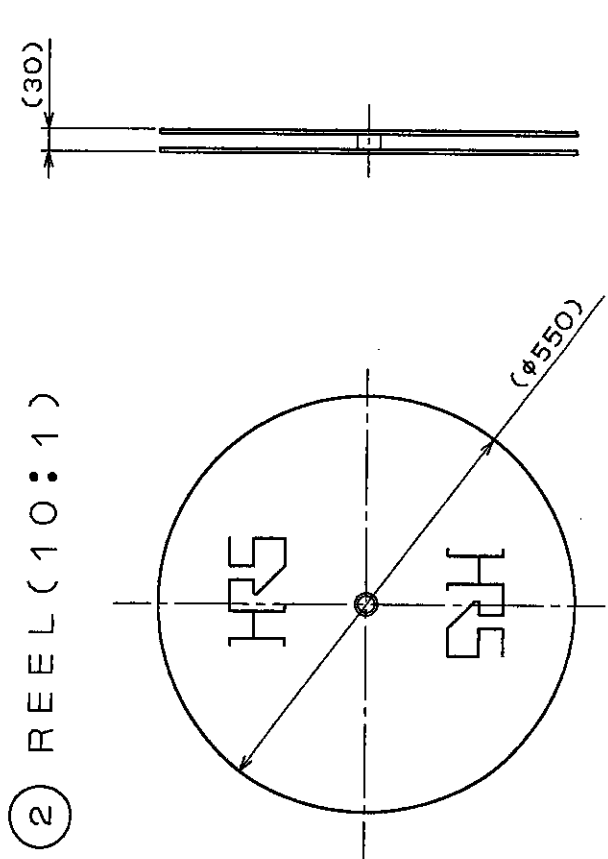

NOTE 1 APPLICABLE WIRE

- 2 : AWG #24~30(INSULATION DIA 1.15 MAX).
CRIMPING CONDITION AS CRIMP HEIGHT IS
SPECIFIED INDIVIDUALLY DEPENDING ON
WIRE USED.

1	PHOSPHOR BRONZE	SILVER PLATING(N=10000)	2	CARTON	(REEL)	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS	
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED	APPROVED <i>M. Ojoshida</i>
			<i>K. Kawaguchi</i>	<i>H. Kishi</i>		
			96. 8 . 22	96. 8 . 23		96. 8 . 29
DRAWING NO.		PART NO.		RP19-SC-222		
EDC3-021032						
SCALE						
5 : 1						
UNITS						
mm						
HRS		HIROSE ELECTRIC CO., LTD.				
		CODE NO.		CL113-0266-2		
				1/1		