
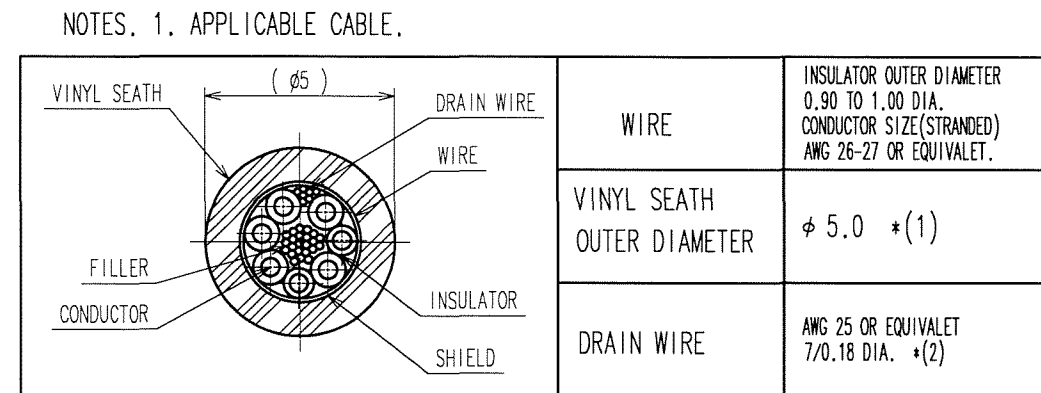
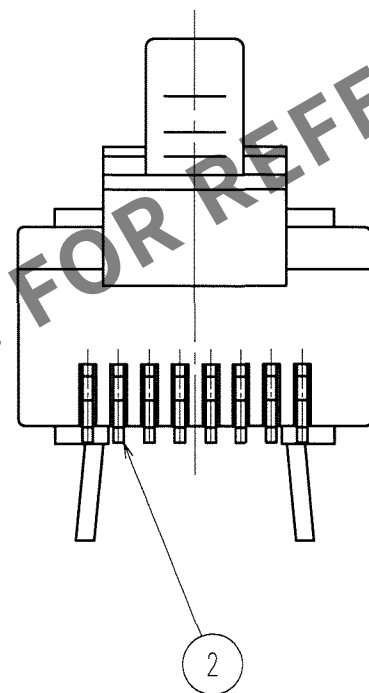
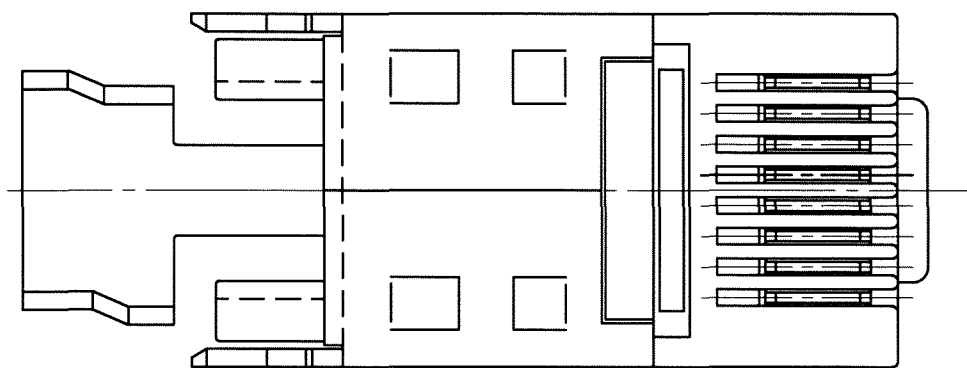
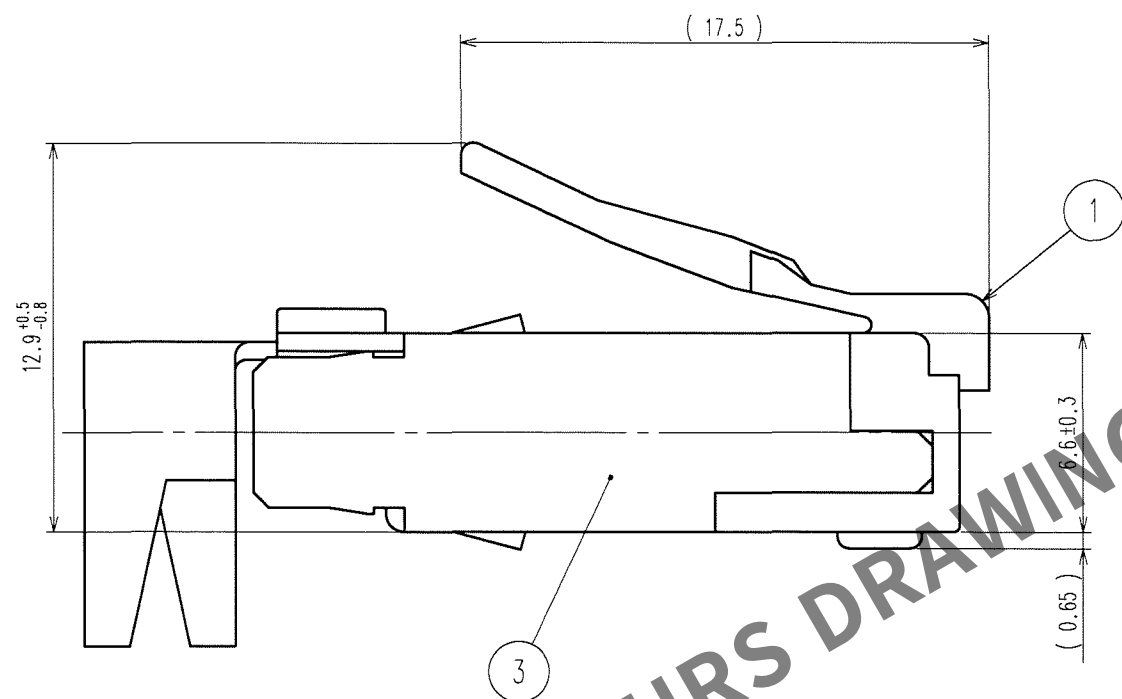



Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	2	DIS-E-001346	Y.S	Y.E	09.03.16	1					. .
1					. .	1					. .
1					. .	1					. .

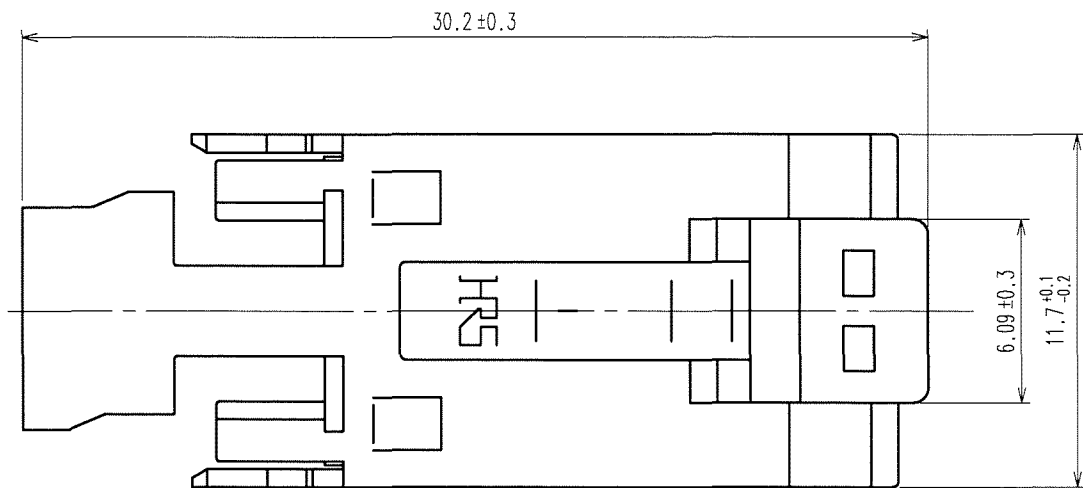


* (1) CABLE ENTRY IS 5.6 MIN.

* (2) CONSTRUCTION IS FOR REFERENCE.

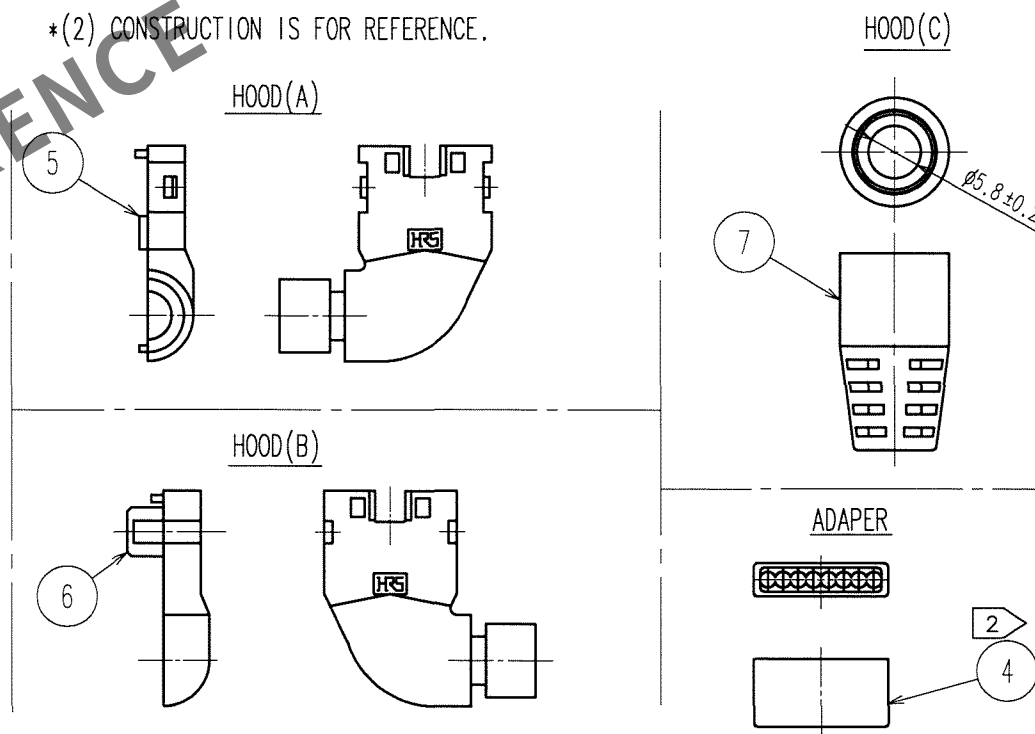

2 ADAPTER SHALL BE USED TO ALIGN INDIVIDUAL WIRE.

3. THE DIMENSION IN PARENTHESIS IS FOR REFERENCE.

3	BRASS		OVER: TIN REFLOW PLATING 1μ m min UNDER: COPPER PLATING 0.5μ m min	7	PVC	BLACK		
2	PHOSPHOR BRONZE		CONTACT: GOLD PLATING 1.27μ m min TERMINAL: GOLD PLATING 0.03μ m min UNDER: NICKEL PLATING 2μ m min	6	POLYCARBONATE	BLACK		
1	POLYCARBONATE			5	POLYCARBONATE	BLACK		
				4	POLYCARBONATE	TRANSPARENCY		
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS		
CODE NO. (OLD)				DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
				Y. SATO	T. TANIGUCHI	Y. ENAMI	H. MIWA	
				05.09.21	05.10.03	05.10.07	05.10.13	. .
		DRAWING NO.			PART NO.			
SCALE		EDC3-120680-01			TM11APA-88P(03)			
4 : 1								
UNITS		HRS			CODE NO.			
mm		HIROSE ELECTRIC CO., LTD			CL222-2781-9-03			
					1/1			