

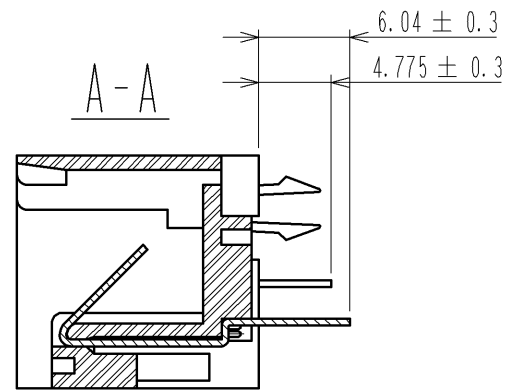
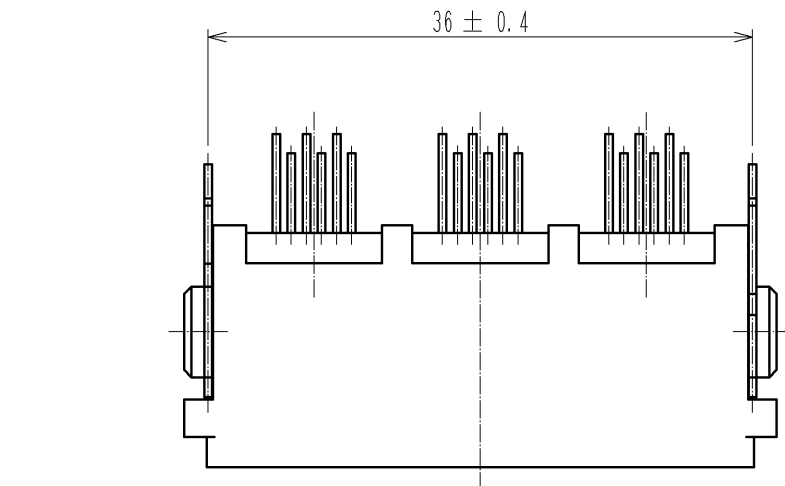
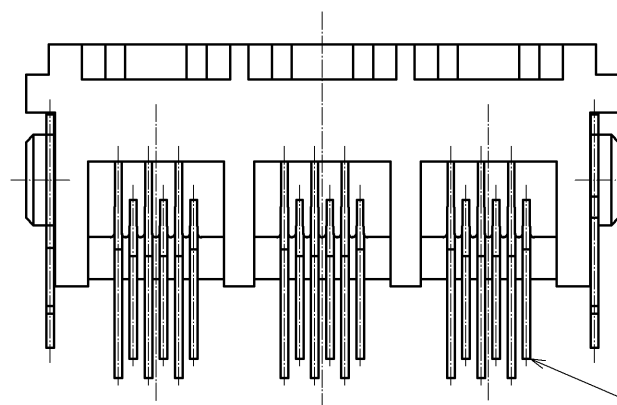
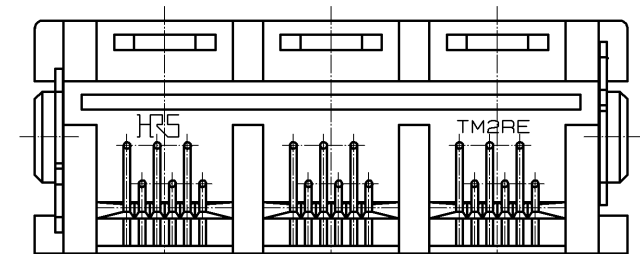
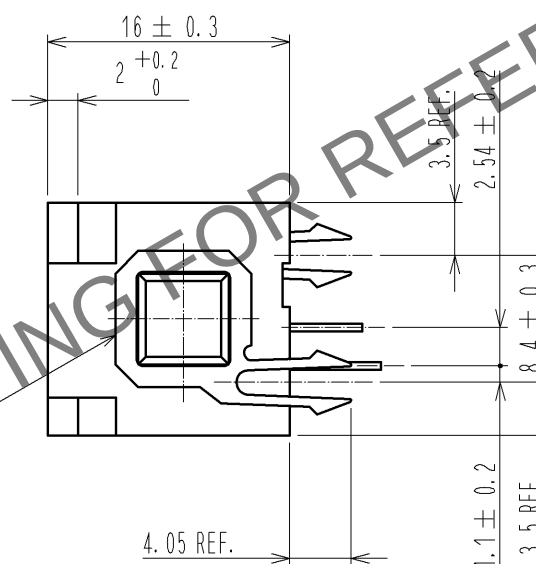



Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

A
B
C
D
E
F

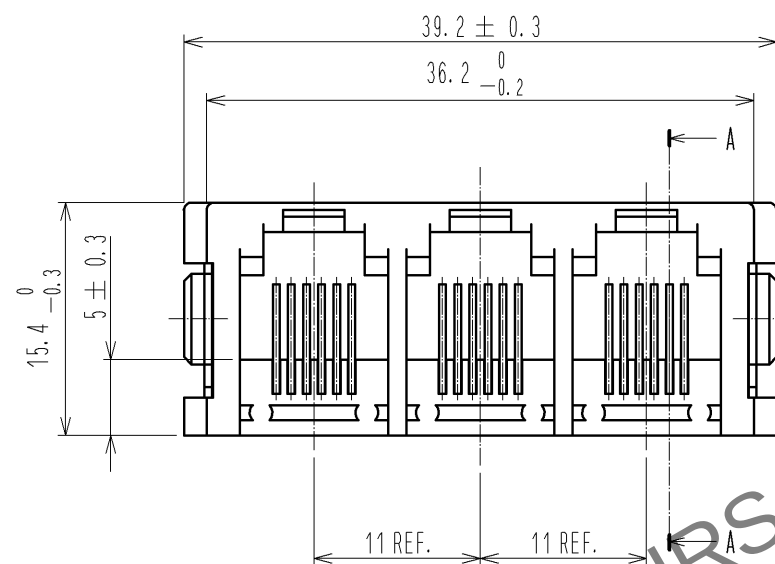

RECOMMENDED PC BOARD PATTERN (MOUNTING SIDE)
TOLERANCE HAVE NOT BEEN DESCRIBED TO THE REFERENCE DIMENSION.
t=1.6

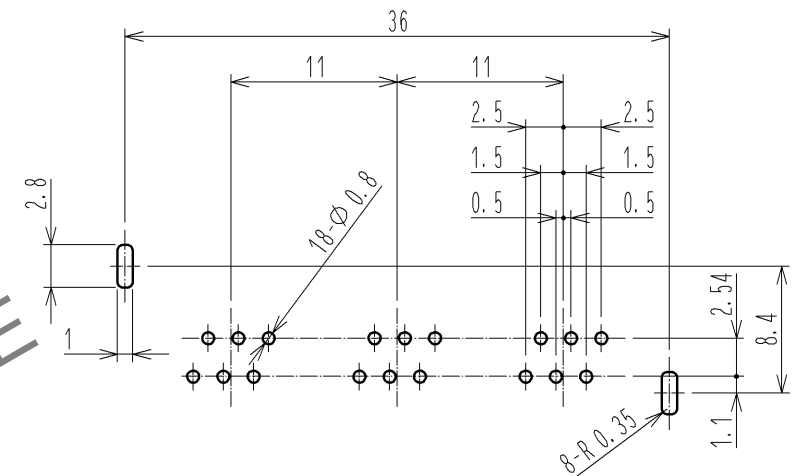

2	PHOSPHOR BRONZE	CONTACT:GOLD PLATING 1.27#m MIN LEAD :GOLD PLATING 0.03#m MIN UNDER :NICKEL PLATING 1.27#m MIN	3	PHOSPHOR BRONZE	OVER :TIN PLATING 3#m MIN UNDER:NICKEL PLATING 2#m MIN		
1	PBT	(GRAY)UL94V-0					
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 2 : 1	COUNT 3	DESCRIPTION OF REVISIONS DIS-E-002584	DESIGNED MT. ITANO	CHECKED KI. NAGANUMA	DATE 08.12.15
 HIROSE ELECTRIC CO., LTD.		APPROVED :HO. MIWA	06.04.27	DRAWING NO. EDC3-022564-02			
		CHECKED :HO. MIWA	06.04.27	PART NO. TM2RE-1818(50)			
		DESIGNED :S.J. SHIMIZU	06.04.27	CODE NO. CL222-0796-5-50			
		DRAWN :S.J. SHIMIZU	06.04.27				
							