



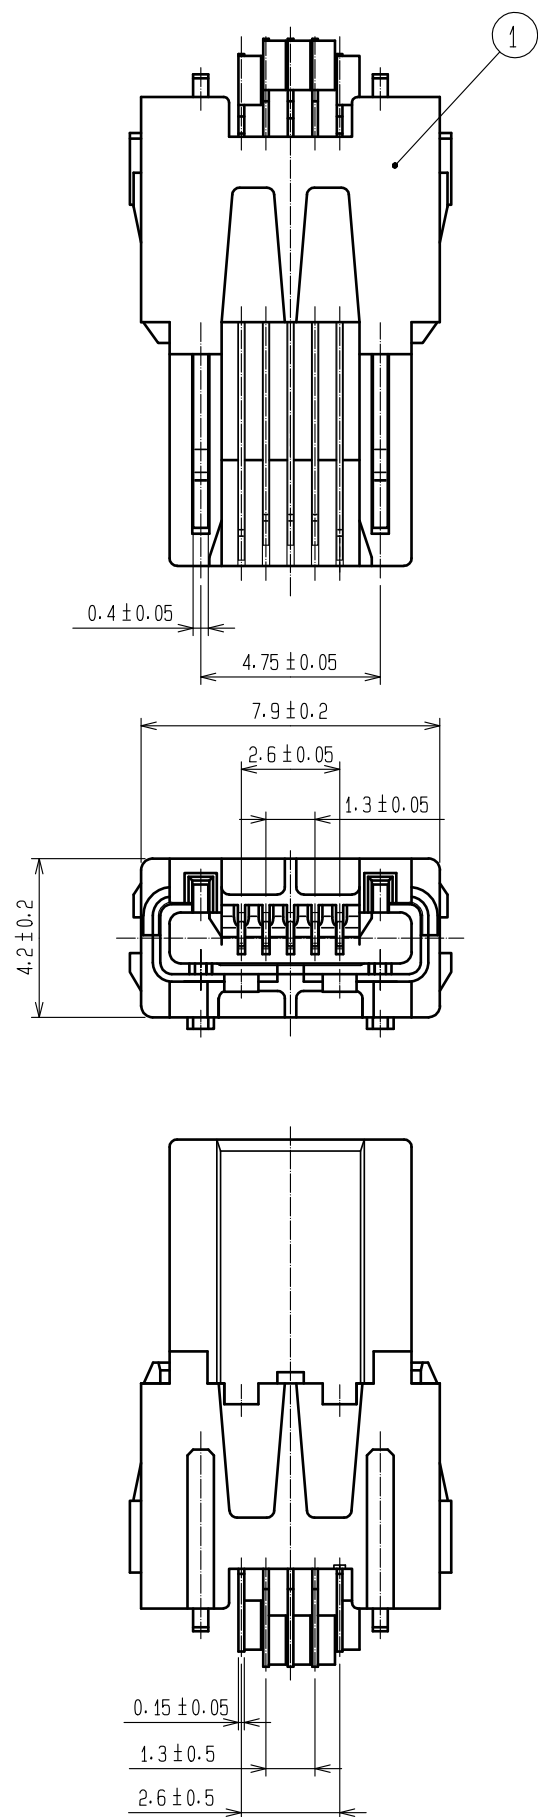


Fig - 1 PACKING SPECIFICATION -In the case of 4000 pcs-


1. STORED IN A TRAY (200pcs / tray)

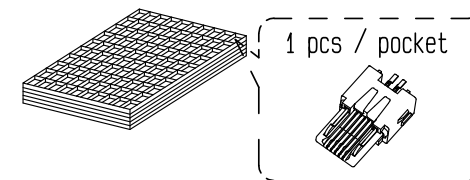


2. BANDED FOR A PACK

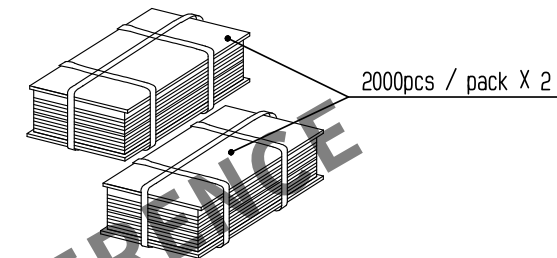

3. STORED IN A CARTON BOX

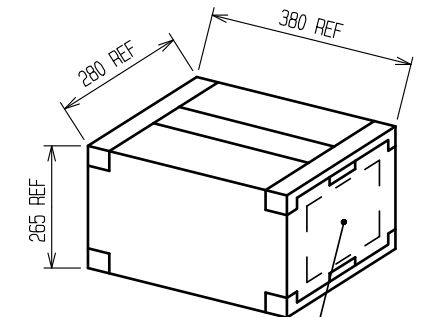

SHOWN AS FOLLOWS:
- Part No.
- Code No.
- QTY
- Lot No.

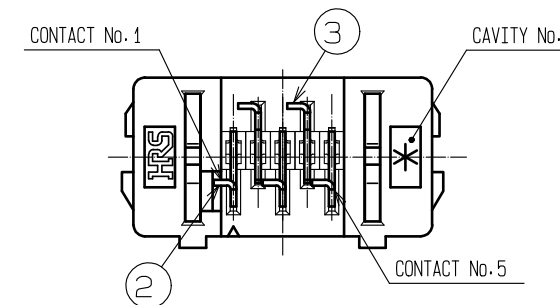

NOTES 1 This is wire soldering type.
Please refer to the assembly manual, ETAD-E2699, for detail.

2 Plating
- under plating Nickel 2 μm min.
- contact area Gold 0.75 μm min.
- lead area Tin 1 μm min.

2	COPPER ALLOY	2		4	STAINLESS STEEL						
1	LCP-M	WHITE	UL94V-0	3	COPPER ALLOY	2					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS					
UNITS mm				SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU		15.10.27	DRAWING NO.		EDC-126040-30-00				
		CHECKED : KN. ICHIKAWA		15.10.27	PART NO.		ZX40-A-5S-UNIT(30)				
		DESIGNED : TS. ITO		15.10.27	CODE NO.		CL242-0010-2-30				
		DRAWN : AK. AKIYAMA		15.10.27							

Apr.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Fig - 2 SHIELDING-PLATE ASSEMBLY



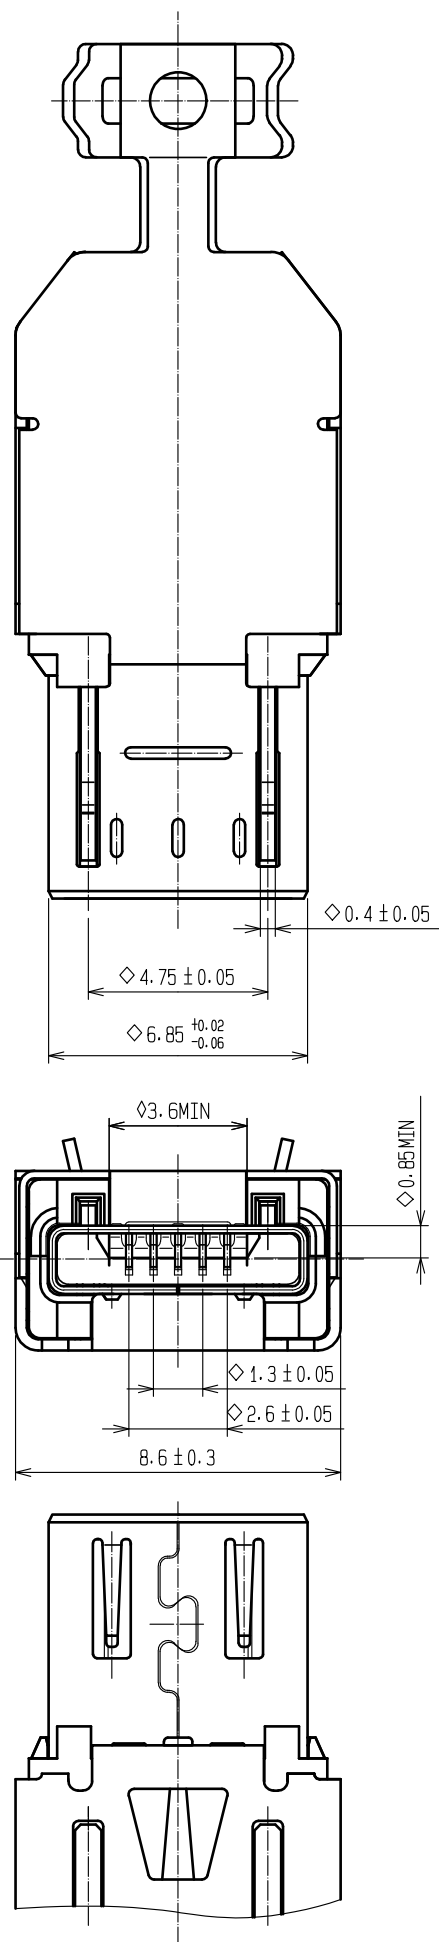


Fig - 3 OVER-MOLDING
(Refer to USB specification)

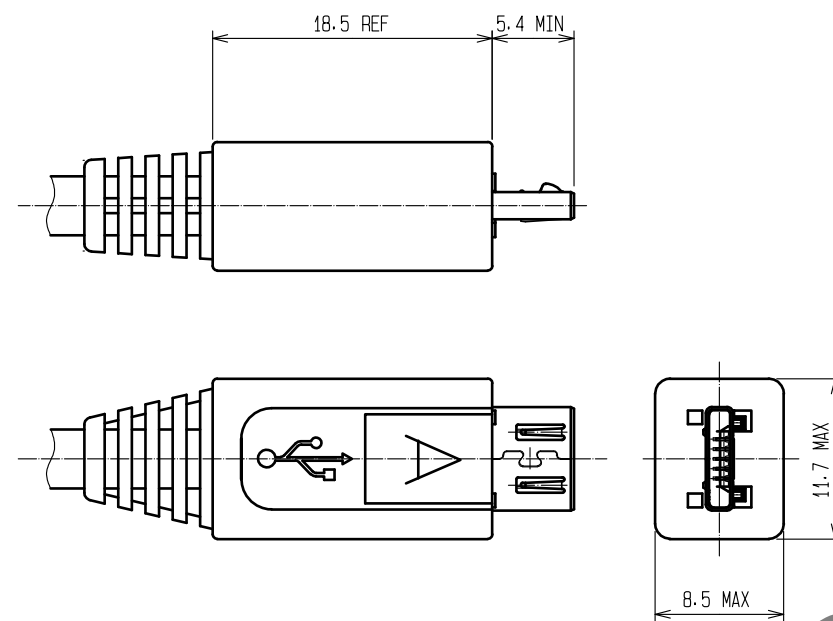


ZX40-A-SLDA
Code No. CL242-0011-5

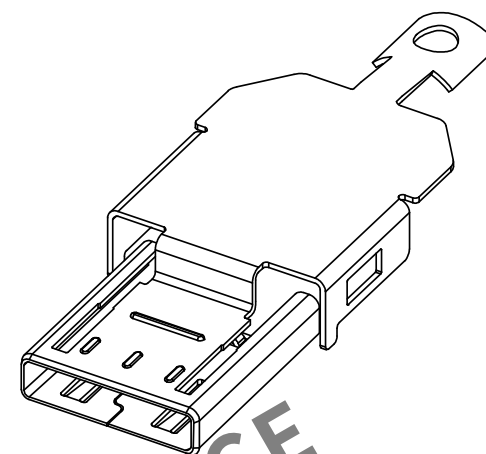


Note:
- Sold separately
- Delivered by the reel

ZX40-SLDB
Code No. CL242-0004-0

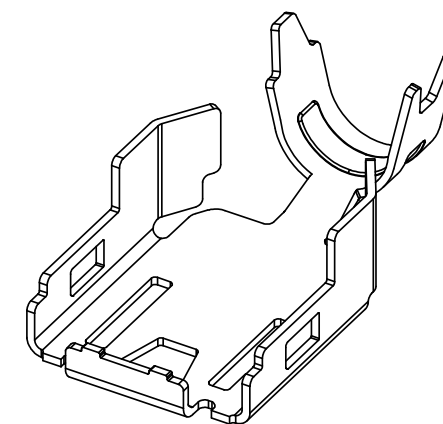

Note:
- Sold separately
- Delivered by the reel
- Applied to Ø3.8mm cable

Fig - 4 MATED CONDITION

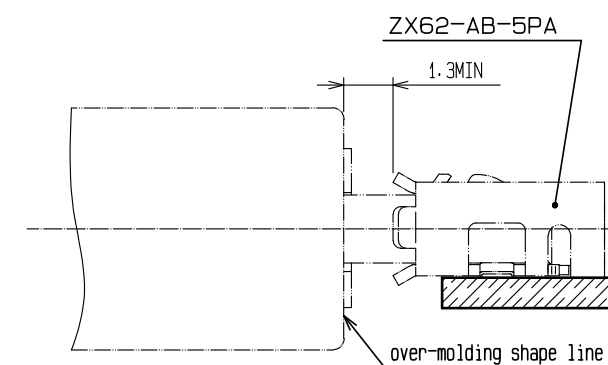

NOTES 3 Shielding-plates, ZX40-A-SLDA and ZX40-SLDB, are used for assembly.
4 *◇*symbol added to each dimension means critical dimension on USB specification.
Please check them after over-molding.

HR5

DRAWING NO.	EDC-126040-30-00
PART NO.	ZX40-A-5S-UNIT(30)
CODE NO.	CL242-0010-2-30

2/2