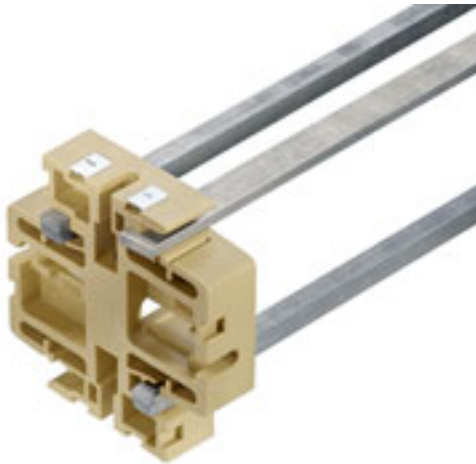


**SH 3****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

We offer a broad portfolio of mounting support for easy handling and supplementation of our products. From various tools to insulating sleeves and various screws, our components are matched to each other down to the last detail and thus facilitate assembly in compliance with the respective standards and protective regulations.

**General ordering data**

|            |                                                                 |
|------------|-----------------------------------------------------------------|
| Version    | Busbar support, silver, 100 °C, Width: 65 mm, V-2, Polyamide 66 |
| Order No.  | <a href="#">0556660000</a>                                      |
| Type       | SH 3                                                            |
| GTIN (EAN) | 4008190123086                                                   |
| Qty.       | 10 pc(s).                                                       |

## SH 3

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |          |                 |            |
|------------|----------|-----------------|------------|
| Depth      | 65 mm    | Depth (inches)  | 2.559 inch |
| Height     | 15 mm    | Height (inches) | 0.591 inch |
| Width      | 65 mm    | Width (inches)  | 2.559 inch |
| Net weight | 26.403 g |                 |            |

## Temperatures

|                                  |               |                                  |        |
|----------------------------------|---------------|----------------------------------|--------|
| Ambient temperature              | -5 °C...40 °C | Continuous operating temp., min. | -50 °C |
| Continuous operating temp., max. | 100 °C        |                                  |        |

## Material data

|          |              |                           |            |
|----------|--------------|---------------------------|------------|
| Material | Polyamide 66 | Surface finish            | all others |
| Colour   | silver       | UL 94 flammability rating | V-2        |

## System specifications

|         |                             |
|---------|-----------------------------|
| Version | 15 x 6 mm busbar connection |
|---------|-----------------------------|

## Conductors for clamping (rated connection)

|                    |               |
|--------------------|---------------|
| Type of connection | Miscellaneous |
|--------------------|---------------|

## General

|                 |            |                                   |        |
|-----------------|------------|-----------------------------------|--------|
| Number of poles | 3          | Operating temperature range, max. | 100 °C |
| Surface finish  | all others |                                   |        |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC001166    | ETIM 7.0    | EC001166    |
| ETIM 8.0    | EC001166    | ETIM 9.0    | EC001166    |
| ETIM 10.0   | EC001166    | ECLASS 9.0  | 27-40-06-07 |
| ECLASS 9.1  | 27-14-11-92 | ECLASS 10.0 | 27-40-06-07 |
| ECLASS 11.0 | 27-40-06-07 | ECLASS 12.0 | 27-40-06-07 |
| ECLASS 13.0 | 27-40-06-07 | ECLASS 14.0 | 27-40-06-07 |
| ECLASS 15.0 | 27-40-06-07 |             |             |

## Environmental Product Compliance

|                        |                             |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC             | No SVHC above 0.1 wt%       |

## Approvals

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

## Downloads

|                  |                                     |
|------------------|-------------------------------------|
| Engineering Data | <a href="#">CAD data – STEP</a>     |
| Brochures        | <a href="#">CAT 1 TERM 16/17 EN</a> |