


Datasheet

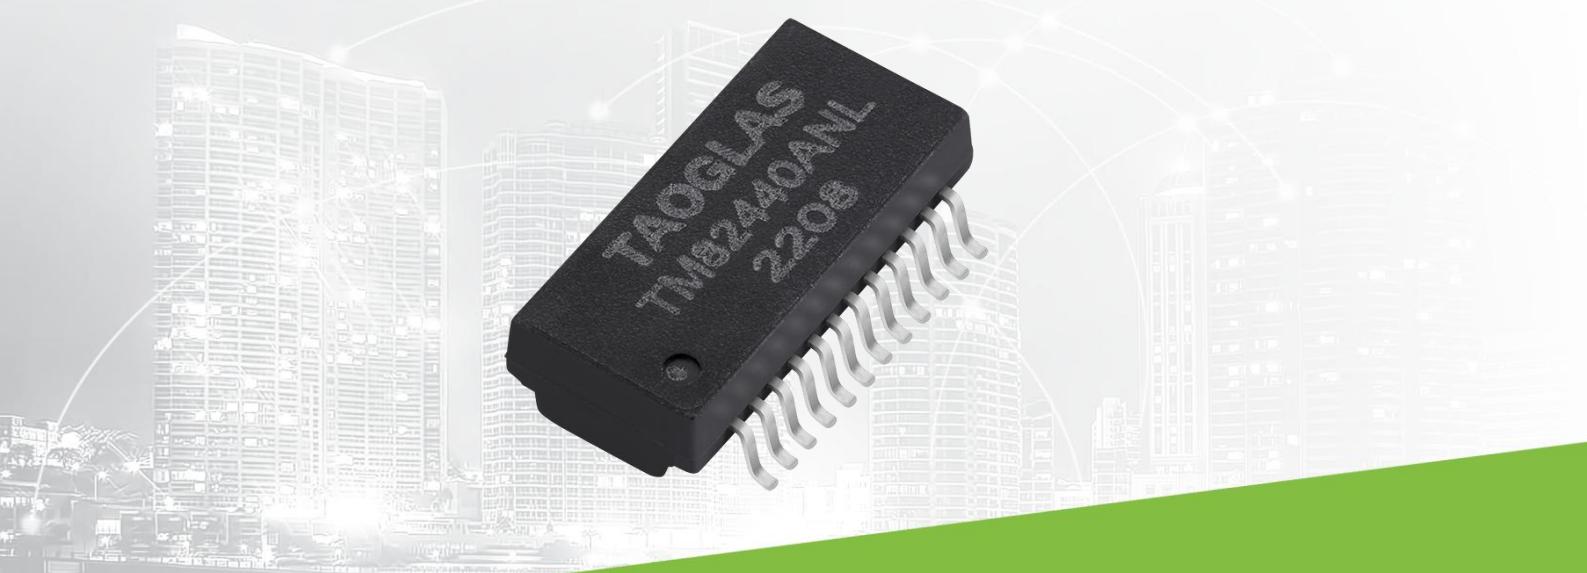

TAOGLAS®

LAN Transformer 1G Base-T

Part No:
TM82440ANL

Description:
1000 Base-T/1G transformer
Single Port and 24pin SMT

Features:
AutoMDIX
Industrial grade
RoHS & REACH Compliant

1. Introduction	3
2. Specifications	4
3. Mechanical	5
4. Electrical	6
5. Packaging & Storage	7
Changelog	8

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Ireland
ISO 9001: 2015
Certified



Taiwan
ISO 9001: 2015
Certified



1. Introduction



Featuring a compatible footprint with industry LAN transformers, and designed to work in demanding industrial environmental conditions, the Taoglas TM82440ANL is a 1GBase-T Single Port of 24pin capable of AutoMDIX feature.

Typical applications for this cost-effective part are:

- Industrial Automation
- Hubs
- Routers
- Switches
- Wireless Access Points

The Taoglas Magnetics Product Team have over fifteen years of LAN magnetics design and high-quality manufacturing. With an ever-expanding portfolio, we provide trusted products and services to customers within a wide range of applications such as: Networking and Interconnect Devices, Servers, Switches, Router, Communication systems and any Digital Consumer electronics.

The Taoglas Exos Series offer an extensive product line of LAN Transformers designed for commercial and industrial grade applications, supporting 10/100 Base-T (Exos100 Series), 1G Base-T (Exos1G Series) and 10G Base-T (Exos10G Series). These products include Single, Dual, and Quad configurations not only for standard applications but also for Power over Ethernet (PoE, PoE+, PoE++).

For more information on the range of products or for assistance with integration, contact your regional Taoglas customer support team

2. Specifications

Electrical Performance @ 25°C		
Inductance OCL	350µH MIN @ 100KHz 0.1V 8mA DC Bias	
Turns Ratio ($\pm 5\%$)	TX=1CT: 1CT	RX=1CT: 1CT
LL	0.4uH Max	
DCR	1.2Ω Max	
Insertion Loss	-1dB MAX @ 1-100Mhz	
Return Loss	1-40MHz: 16dB Min 40-100MHz: 10+20*log(f/80) dB Min	
Cross talk	-45dB MIN @ 30Mhz -40dB MIN @ 60Mhz -35dB MIN @ 100Mhz	
DCMR	-40dB MIN @ 30Mhz -35dB MIN @ 60Mhz -30dB MIN @ 100Mhz	
Hi-Pot	1500Vrms	




Environmental Specifications	
Operating Temperature	-40°C TO +85°C

Compliance	
UL recognized - FILE NO. E528697	
RoHS Compliant	

Storage requirements	
Humidity	Storage Temperature
MSL - 1	-40°C TO +85°C

3. Mechanical

3.1 Mechanical Drawings

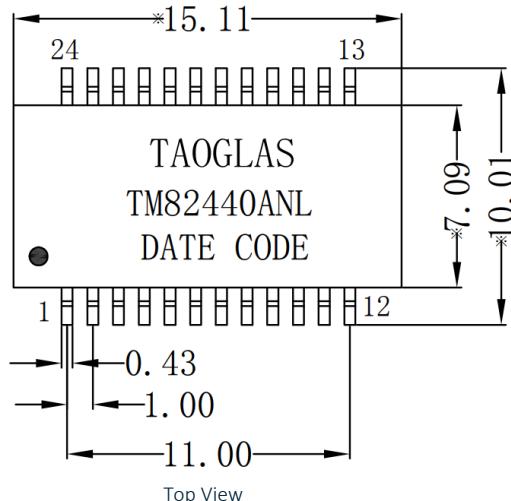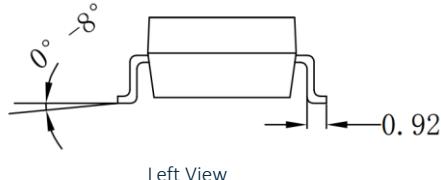


Mechanical Specifications

Length	15.11 mm
Width	10.01 mm
Height	4.01 mm
Mounting Style	Surface Mount (SMT)

Dimensions are in millimeters with the following tolerances: X.XX = ± 0.25

3.2 Pad Layout

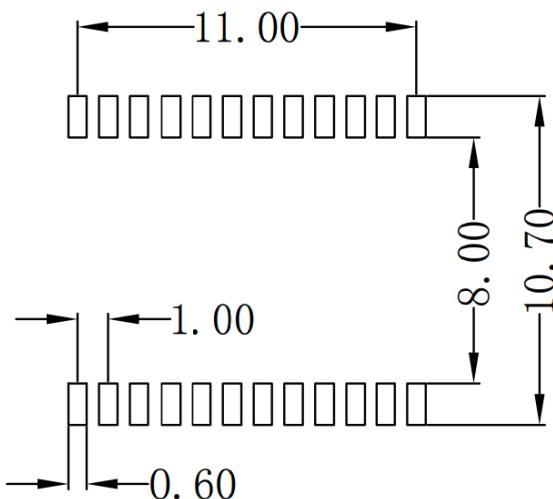


Suggested Pad Layout


Dimensions are in millimeters with the following tolerances: X.XX = ± 0.10

4. Electrical

4.1 Electrical Drawings

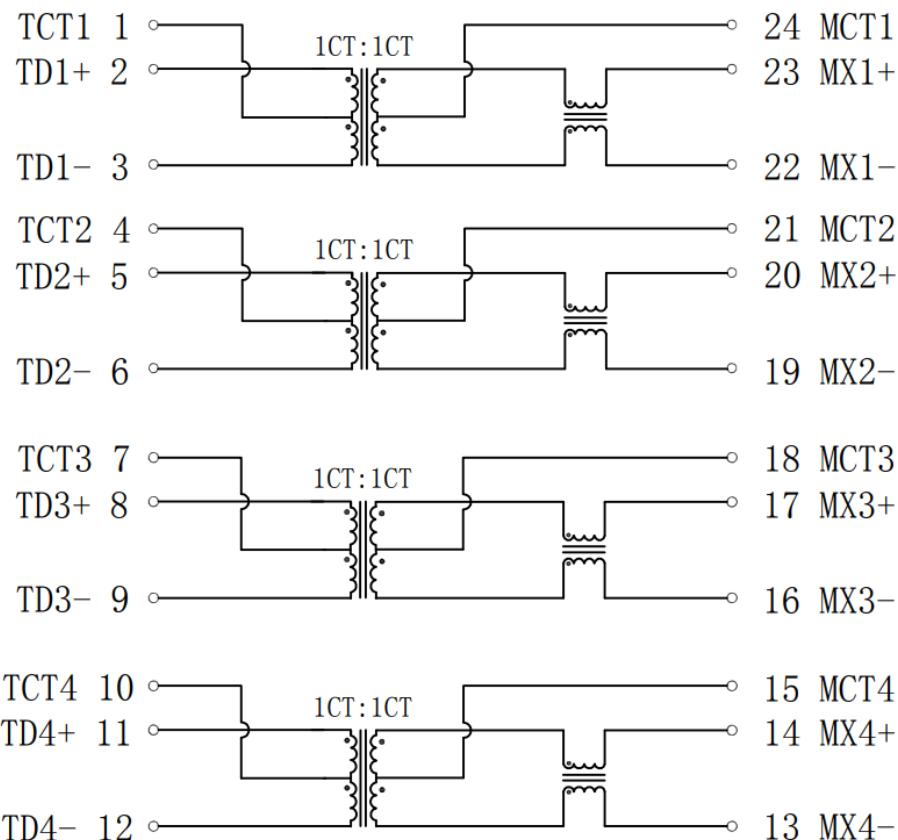

4.2 Profile of Reflow Solder

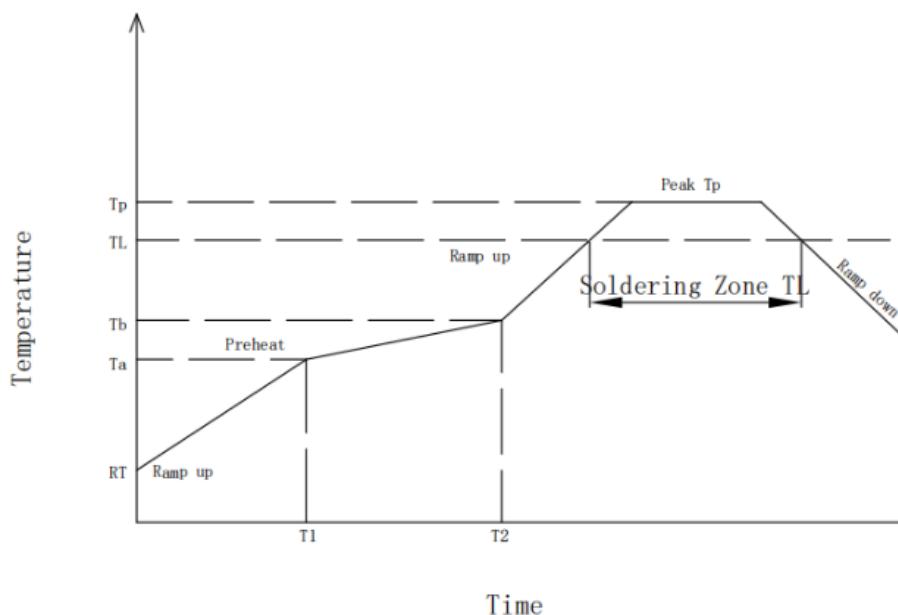

5. Packaging and Storage

5.1 SPQ




800 pcs/reel

A (Carrier Tape Width): 24 ± 0.3 mm

B (Sprocket hole to Cavity center): 11.5 ± 0.2 mm

C (Cavity width): 10.3 ± 0.2 mm

Reel weight: 900g

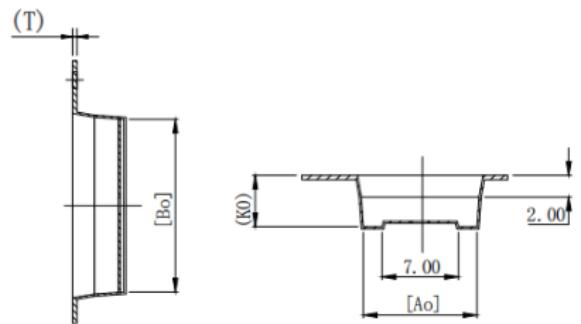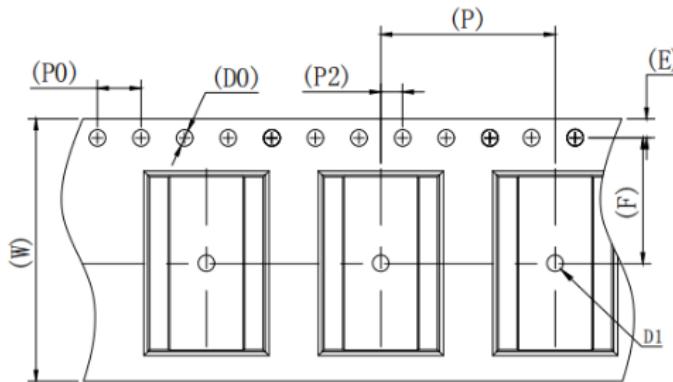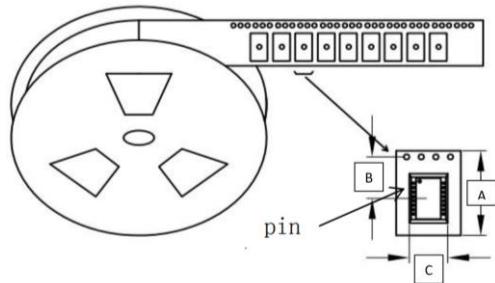


W	$24.00^{+0.30}_{-0.30}$	T	0.40 ± 0.05	P2	2.00 ± 0.10	Ao	10.6 ± 0.10
E	1.75 ± 0.10	P	16.00 ± 0.10	Do	$\varnothing 1.55^{+0.05}_{-0.05}$	Bo	15.80 ± 0.10
F	11.5 ± 0.10	Po	4.00 ± 0.10	D1	$\varnothing 1.50^{+0.10}_{-0.00}$	Ko	4.6 ± 0.10

5.2 Carton

1CTN = 6 reels = 4800 pcs

Carton dimensions: 370*370*250mm

Carton Weight: 7.5kg

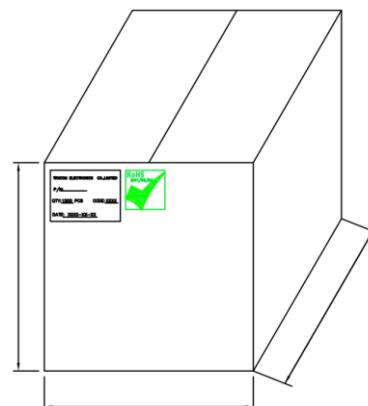

Changelog

Changelog for the datasheet

SPE-22-8-070 – TM82440ANL

Revision: C (Current Version)

Date:	2025-10-21
Notes:	Updated return loss spec.
Author:	Paul Liu

Previous Revisions

Revision: B

Date:	2024-02-29
Notes:	
Author:	Javier Vasena

Revision: A (Original First Release)

Date:	2022-11-08
Notes:	
Author:	Javier Vasena



TAOGLAS.[®]

www.taoglas.com