


HORIZONTAL MOUNTING METHOD ON DIN RAIL



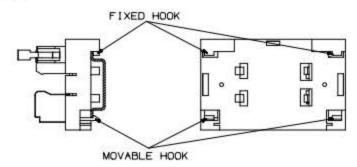


MOUNT TO DIN RAIL


- 1. USE THE FIXED AND MOVABLE HOOKS ON THE BACK OF THE CASE TO MOUNT A PRODUCT TO DIN RAIL
- FIRST, HOOK THE FIXED HOOKS TO DIN RAIL. NEXT, PUSH THE MOVABLE HOOKS INTO DIN RAIL.
- 3. WHEN THE MOVABLE HOOKS FIT INTO DIN RAIL, MOUNTING IS COMPLETED.



DETACH FROM DIN RAIL


1. PUSH THE PRODUCT TOWARD THE FIXED HOOKS SO THAT THE FIXED HOOKS ARE DISENGAGED FROM DIN RAIL.









3. THEN, @REMOVE THE MOVABLE HOOKS ALSO FROM DIN RAIL AND @REMOVE THE PRODUCT.




VERTICAL MOUNTING METHOD ON DIN RAIL






MOUNT TO DIN RAIL


1. USE THE FIXED AND MOVABLE HOOKS ON THE BACK OF THE CASE TO MOUNT A PRODUCT TO DIN RAIL




FIRST, HOOK THE FIXED HOOKS TO DIN RAIL. NEXT, PUSH THE MOVABLE HOOKS INTO DIN RAIL.




3. WHEN THE MOVABLE HOOKS FIT INTO DIN RAIL, MOUNTING IS COMPLETED.



- DETACH FROM DIN RAIL
- 1. PUSH THE PRODUCT TOWARD THE FIXED HOOKS SO THAT THE FIXED HOOKS ARE DISENGAGED FROM DIN RAIL.



2. ONCE THE FIXED HOOKS ARE DETACHED FROM DIN RAIL, LIFT UP THE FIXED HOOK SIDE AND REMOVE PRODUCT FROM DIN RAIL.



3. THEN, ①REMOVE THE MOVABLE HOOKS ALSO FROM DIN RAIL AND ②REMOVE THE PRODUCT.

