

STM32G0 SERIES

32-bit Mainstream MCUs



Entry-level Arm® Cortex-M0+ MCUs - Efficiency at its best

The STM32G0 Series is not simply another Arm® Cortex®-M0+ microcontroller. It is setting a new definition of what an efficient microcontroller must offer. This is all about best optimization, down to each and every detail, to offer the best value for money and allow you to achieve your goals with the minimum BOM cost and the maximum flexibility for upgrades. The STM32G0x0 Value Line embeds an accurate internal clock allowing further cost saving, and makes no compromise on what matters. The STM32G0x1 line provides upgraded features in analog, timer resolution up to 2xfcpu (7.8ns) and is IoT ready with enhanced security features. It supports the latest USB type-C specification including Power Delivery 3.0.

EFFICIENT

- Arm[®] Cortex[®] M0+ at 64 MHz
- Compact cost: maximum I/Os count
- Best RAM/Flash Ratio
- Smallest possible package down to 8-pin
- Large platform up to 512 Kbyte Flash in small packages
- 500 nA in standby with RTC, 3.5 μA in stop mode, <100 μA/MHz
- Accurate internal high-speed clock 1% RC
- Best optimization, down to each and every detail
- Offers the best value for money
- Free tool suite

ROBUST

- Low electromagnetic susceptibility, EMC
- Clock Monitoring and 2 Watchdogs
- Voltage monitoring with interrupts and reset
- Error correction on Flash, parity on RAM
- IoT ready with embedded security
- Hardware AES-256 encryption or the new Securable Memory Area.
- Safe Firmware upgrade / Install


SIMPLE

- Easy to configure thanks to the intuitive and graphic STM32CubeMX configuration tool.
- Easy to develop based on the Hardware Abstraction Layer library (HAL) or the lowlayer library (LL) allowing maximum re-use and faster time-to-market.

STM32G081 block diagram

	Arm [®] Cortex [®] -M0+ CPU Up to 64 MHz	Connectivity
	Nested vector interrupt	2x SPI (I ² S)
System	Controller (NVIC)	4x USART
Power supply POR/PDR/PVD/BOR	SW debug	(2x with LIN, smartcard, IrDA, modem control)
	Memory Protection Unit	1x LPUART
Xtal oscillator 32 kHz + 4 to 48 MHz	AHB-Lite bus matrix	2x I ² C (SMBus, PMBus,
Internal RC oscillators	APB bus	Fast Mode Plus)
32 kHz (±5%) + 16 MHz (±1%)	Up to 128-Kbyte Flash memory	USB Power Delivery (incl. BMC + PHY)
PLL + Prescaler	Up to 36-Kbyte SRAM	
Clock control	20-byte backup registers	
RTC/AWU	Boot ROM	Control
Systick timer	7-channel DMA	1x 32-bit timer
2x watchdogs (independent and window)	Analog	1x16-bit Motor C. timer f _{MAX} = 128 MHz 4 PWM + 3 compl.
60 I/Os on 64 pins	Temp. sensor	5x16-bit timers
Cyclic redundancy check (CRC)	1x 12-bit ADC SAR 16-channels / 2.5 MSPS	2 PWM each one with f _{MAX} = 128 MHz
	1x 12-bit DAC 2ch	2x Low-power timers
	2x comparators	

STM32G0 portfolio

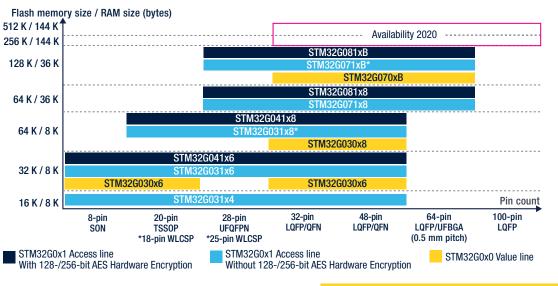



STM32G0 ONLINE TRAINING

www.st.com/stm32g0-online-training



© STMicroelectronics - May 2020 - Printed in United Kingdom - All rights reserved ST and ST logo are trademarks or registered trademarks of STMicroelectronics International NV or its affiliates in the EU and/or other countries. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.



Hardware Tools

A full set of evaluation boards enables flexible prototyping as well as full STM32G0 evaluation.





STM32G081B-EVAL Evaluation board

STM32G0316-DISC0 / STM32G071B-DISC0 (USB Type-C™) Discovery Kits



NUCLEO-G031K8 (32-pin Nucleo) NUCLEO-G070RB / NUCLEO-G071RB (64-pin Nucleo)

Software Tools

STM32CubeMX enables fast development thanks to its MCU clock configurator, power consumption calculator and code generation tools.

Embedded Software

The STM32CubeG0 package includes the STM32Cube HAL and lowlayer (LL) APIs peripheral drivers, plus a consistent set of middleware components (RTOS, USB, USB Power Delivery, FatFS, graphics and STM32 touch sensing). All embedded software utilities come with a full set of examples running on STMicroelectronics boards.