




Product Summary Guide



Audio Experts in a Voice Connected World

Cirrus Logic Product Summary Guide

World-Class Audio Leadership


Cirrus Logic is the leading supplier of hardware and software solutions for audio signal processing from voice capture to audio playback in the newest technology found in mobile, consumer and automotive applications.





Best-in-Class Hardware and Software for a Voice Connected World

With a complete portfolio of products throughout the audio signal chain — from voice capture to playback — Cirrus Logic’s best-in-class, ultra low power ICs and patented SoundClear® software technology elevate the clarity and quality of the audio signal by enhancing voice quality, voice capture, speech recognition and audio playback.

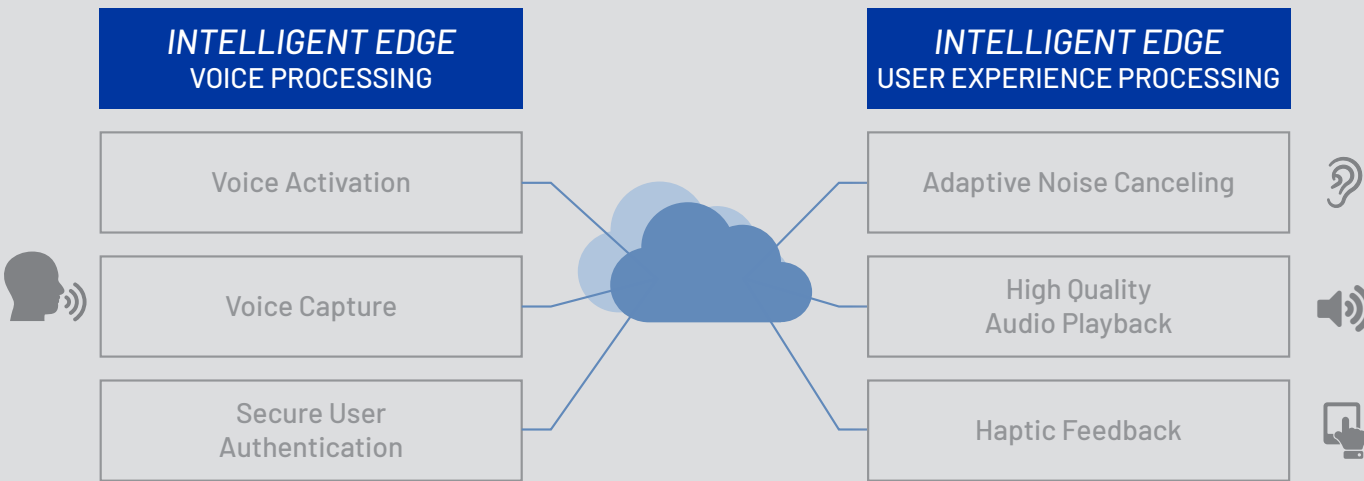

Audio	2
SoundClear® Software	12
Industrial, Communication	16

World-Class Audio Leadership

Audio Components

Cirrus Logic's analog and mixed-signal audio converter technologies and audio processors are featured in the most recognized mobile, consumer, professional and automotive audio applications. As a world leader in complete end-to-end audio solutions, from the microphone to the speaker, Cirrus Logic products drive innovation in popular applications such as smartphones, tablets, home theater systems, docking stations, Bluetooth speakers, headphones and gaming systems. The company's reputation for superior-fidelity audio converters has driven success in professional audio applications such as digital mixing consoles, multi-track digital recorders and effects processors. The combination of Cirrus Logic's best-in-class audio components, along with our sophisticated SoundClear® voice-processing software technology, provides a compelling value proposition for our customers.

Audio DSPs

CS48L10

CS48L11

CS48L32 NEW

CS495314

CS497014

CS497024

CS49834

CS49844

Audio A/D Converters

CS5340

CS5341

CS5342

CS5343

CS5344

CS5346

CS5351

CS5361

CS5364

CS5366

CS5368

CS5381

CS53L21

CS53L30

WM8737

Audio D/A Converters

CS43130

CS43131 NEW

CS43198 NEW

CS4334/35/38/39

CS4344/45/48

CS4349

CS4350

CS4354

CS4361

CS4362A/82A

CS4365/85

CS4385A

CS4398

CS4399

CS43L21

CS43L22

CS43L36

WM1824

WM8523

WM8524

WM8716

WM8740

WM8741

WM8742

WM8761

WM8918

Smart Codecs

CS42L92 NEW

CS47024

CS47028

CS47048

CS47L15

CS47L24

CS47L35

CS47L85

CS47L90

CS48L32 NEW

WM5102/S

WM8281

Portable Codecs

CS42L42

CS42L51

CS42L52

CS42L73*

CS46L41

CS46L42

WM8731

WM8750

WM8904

WM8958

WM8988

WM8998

*NRND

Mono/ Stereo Codecs

CS4245
CS4265
CS4270
CS4271
CS4272
WM8510
WM8758
WM8940
WM8960
WM8974
WM8976
WM8978
WM8983
WM8985

Multichannel Codecs

CS4234
CS42432
CS42435
CS42436/38
CS4244
CS42448
CS42516/26
CS42518/28
CS42888
WM8994

AC '97 and HD Audio Codecs

CS4207
WM9714

Stereo Low Power Codecs with Touchscreen Controller

WM9712
WM9713
WM9715

Low Power Codecs with Integrated Video Buffer

WM8944
WM8946

Audio Amplifiers

CS35L37
CS35L41
WM9081

Volume Control

CS3308
CS3310
CS3318

Interfaces and Sample Rate Converters

CS8406
CS8416
CS8421
CS8422
WM8804
WM8805

Clock Generation and Jitter Reduction

CS2000
CS2100
CS2200
CS2300

Imaging A/D Converters

WM8196
WM8199
WM8213
WM8214
WM8215
WM8224
WM8233
WM8234
WM8235
WM8255

Audio DSPs

Part Number	Processor	Key Features & Firmware	DSP Core Speed	Operating Range	Package
CS48Lxx	Ultra low power Audio DSP subsystem.				
CS48L10 SOUNDCLEAR	Single 32-bit	MP3, WMA, Pro Logic II X, Dolby Headphone II, Dolby Virtual Speaker II, DTS Neo X, DTS WOW HDX, Audyssey DSX, Dolby Volume	1.0 V 80 MHz 1.2 V 130 MHz	0 to 70 °C	24 QFN 20 WLCSP
			1.0 V 80 MHz 1.2 V 130 MHz	−40 to 105 °C	
CS48L11 SOUNDCLEAR	Single 32-bit	MP3, WMA, Dolby Digital, Pro Logic II X, Dolby Headphone II, Dolby Virtual Speaker II, DTS Neo X, DTS WOW HDX, Audyssey DSX, DTS SS HD, DTS SS II Stereo, Dolby Volume	1.0 V 80 MHz 1.2 V 150 MHz	0 to 70 °C	24 QFN
			1.0 V 80 MHz 1.2 V 150 MHz	−40 to 105 °C	
NEW CS48L32	Single 32-bit	Programmable HaloCore™ provides platform for low power input voice processing; up to 4 analog or 4 digital mic inputs; supports concurrent audio features including voice-trigger detection, noise reduction, media enhancement plus additional 3rd party algorithms	100 MHz (dual MAC)	−40 to 85 °C	64 WLCSP, 64 QFN
CS495314	Dual 32-bit	(DD, DDEX, DTS, DTSES, DTS96, AAC) + PP2	150 MHz (600 M MAC/Sec)	0 to 70 °C	128 LQFP
			131 MHz (600 M MAC/Sec)	−40 to 85 °C	
CS4970xx	Single chip multistandard surround sound decoder targeted for playback from HD DVD™, Blu-ray Disc® players, and all analog, S/PDIF and HDMI® sources.				
CS497014	Dual 32-bit	(DD+, DTHD, DD, DDEX, AAC) + PP2	150 MHz (600 M MAC/Sec)	0 to 70 °C	128 LQFP
			131 MHz (600 M MAC/Sec)	−40 to 85 °C	
CS497024	Dual 32-bit	(DTS, DTS-ES, DTS96/24, DTS-HD, DD+, DTHD, DD, DDEX, AAC) + PP2	150 MHz (600 M MAC/Sec)	0 to 70 °C	128 LQFP
			131 MHz (600 M MAC/Sec)	−40 to 105 °C	
CS498xx	Multi-core DSP for advanced audio processing and decoding.				
CS49834 SOUNDCLEAR	Triple 32-bit	Decode (Dolby, DTS), Enhance (Dolby, DTS, Audyssey), Post-Process (Dolby, DTS, Audyssey, THX)	300MHz	0 to 70 °C	144 LQFP
CS49844 SOUNDCLEAR	Quad 32-bit	Decode (Dolby ATMOS, DTS UHD), Enhance (Dolby, DTS, Audyssey), Post-Process (Dolby, DTS, Audyssey, THX)	300MHz	0 to 70 °C	144 LQFP

Audio A/D Converters

Part Number	Channels	Resolution (bits)	Dynamic Range (dB)	THD+N (dB)	Sample Rate (kHz)	Analog Inputs	Power Supply (V)	Comments	Package
CS5340	2	24	101	−94	192	Single-ended	VA = 3.3 or 5 VD = 3.3 or 5 VL = 1.8 to 5	Pin compatible with CS5341	16 TSSOP
CS5341	2	24	105	−98	192	Single-ended	VA = 3.3 or 5 VD = 3.3 or 5 VL = 1.8 to 5	Pin compatible with CS5340	16 TSSOP
CS5342	2	24	105	−98	192	Single-ended	VA = 3.3 or 5 VD = 3.3 or 5 VL = 2.5 to 5	384*Fs MCLK	16 TSSOP
CS5343	2	24	98	−92	96	Single-ended	VA = 3.3 or 5	I ² S	10 TSSOP
CS5344	2	24	98	−92	96	Single-ended	VA = 3.3 or 5	LJ	10 TSSOP
CS5346	6	24	103	−95	192	Single-ended	VA = 5 VD = 3.3 VL = 3.3 to 5	6:1 input MUX, PGA, MIC pre-amp, high input impedance	48 LQFP
CS5351	2	24	108	−98	192	Single-ended	VA = 5 VD = 3.3 or 5 VL = 2.5 to 5	Functionally compatible with CS5361	24 SOIC 24 TSSOP
CS5361	2	24	114	−105	192	Differential	VA = 5 VD = 3.3 or 5 VL = 2.5 to 5	Pin compatible with CS5381	24 SOIC 24 TSSOP
CS5364	4	24	114	−105	192	Differential	VA = 5 VD = 3.3 or 5 VLS/VLC = 1.8 to 5	TDM interface, on-chip oscillator	48 LQFP
CS5366	6	24	114	−105	192	Differential	VA = 5 VD = 3.3 or 5 VLS/VLC = 1.8 to 5	TDM interface, on-chip oscillator	48 LQFP
CS5368	8	24	114	−105	192	Differential	VA = 5 VD = 3.3 or 5 VLS/VLC = 1.8 to 5	TDM interface, on-chip oscillator	48 LQFP
CS5381	2	24	120	−110	192	Differential	VA = 5 VD = 3.3 or 5 VL = 2.5 to 5	Flagship performance	24 SOIC 24 TSSOP
CS53L21	2	24	98	−88	96	Single-ended	VA = 1.8 to 2.5 VD = 1.8 to 2.5 VL = 1.8 to 3.3	ADC MUX, PGA, MIC pre-amp	32 QFN
CS53L30	4	24	91	−84	8 – 48	Single-ended Differential	VP = 3 to 5 VA = 1.8	TDM interface, < 2.5 mW, mono analog MIC record, 4x MIC-bias	30 WLCSP 32 QFN
WM8737	2	24	97	−86	16 – 96	Single-ended	VA = 1.8 to 3.6 VD = 1.42 to 3.6	ALC, PGA, Master/Slave	32 QFN

Audio D/A Converters

	Part Number	Channels	Resolution (bits)	Dynamic Range (dB)	THD+N (dB)	Sample Rate (kHz)	Analog Outputs	Power Supply (V)	Output Level (V _{RMS})	Comments	Package
NEW	CS43130	2	32	130	-108	384	Pseudo-Differential	VA = 1.8 VD = 1.8	2		40 QFN 42 WLCSP
	CS43131	2	32	130	-115	384	Pseudo-Differential	VA = 1.8 VD = 1.8	2		40 QFN 42 WLCSP
	CS43198	2	32	130	-115	384	Pseudo-Differential	VA = 1.8 VD = 1.8	2		40 QFN 42 WLCSP
	CS4334/35/38/39	2	24	96	-88	96	Single-ended	VA = 5	1.2	Entry-level stereo DAC	8 SOIC
	CS4344/45/48	2	24	105	-90	192	Single-ended	VA = 3.3 or 5	1.1	Upgrade for CS4340 and CS4340A	10 TSSOP
	CS4349	2	24	101	-91	192	Single-ended	VA = 3.3 or 5	1	Volume control	24 TSSOP
	CS4350	2	24	109	-91	192	Single-ended Differential	VA = 3.3 or 5 VLC = 3.3 to 5 VLS = 1.5 to 5	2	Integrated PLL, TDM interface	24 TSSOP
	CS4354	2	24	101	-86	192	Single-ended	VA/VD = 5.0 VL = 1.5 to 5.0	2	Line-level driver	14 SOIC
	CS4361	6	24	105	-95	192	Single-ended	VA = 5 VL = 1.8 to 5	1.1	Entry-level DAC	20 TSSOP
	CS4362A/82A	6/8	24	114	-100	192	Differential	VA = 5 VD = 2.5 VL = 1.8 to 5	2.3	DSD	48 LQFP
	CS4365/85	6/8	24	114	-100	192	Differential	VA = 5 VD = 2.5 VL = 1.8 to 5	2.5	DSD, TDM interface	48 LQFP
	CS4385A	8	24	114	-100	192	Differential	VA = 5 VD = 2.5 VL = 1.8 to 5	2.3	DSD, TDM interface. Access to TDM through hardware mode with a wider range of TDM timings.	48 LQFP
	CS4398	2	24	120	-107	192	Differential	VA = 5 VD = 3.3 or 5 VL = 1.8 to 5	2.3	Flagship DAC, DSD processor, selectable D-filter	28 QFN 28 TSSOP
	CS4399	2	16	96	-88	2-100	Low Pass Filter	VA = 5	1.2		WLCSP
	CS43L21	2	24	98	-86	96	Single-ended	VA = 1.8 to 2.5 VD = 1.8 to 2.5 VL = 1.8 to 3.3	1.3	HP amp, volume control	32 QFN
	CS43L22	2	24	98	-88	96	Single-ended	VA = 1.65 to 2.83 VD = 1.65 to 2.83 VP = 2.37 to 5.35 VL = 1.8 to 3.3	1.3	HP amp, Class-D speaker amp	40 QFN
	CS43L36	2	32	114	-98	8-192		VA = 1.8 VD = 1.1 - 1.94	1		40 QFN 49 WLCSP
	WM1824	2	24	106	-88	192	Single-ended	VA = 2.97 to 3.63 VD = 1.62 to 3.63	2.1	HW control	24 QFN
	WM8523	2	24	106	-93	192	Single-ended	VA = 3 to 3.6 VD = 3 to 3.6	2	Digital volume control, HW and 2/3-wire SW control	20 TSSOP
	WM8524	2	24	106	-93	192	Single-ended	VA = 3 to 3.6 VD = 3 to 3.6	2.1	HW control	16 TSSOP
	WM8716	2	24	112	-97	192	Single-ended	VA = 3 to 5.5 VD = 3 to 5.5	1.1	Selectable digital filter response, HW and 3-wire SW control	28 SSOP
	WM8740	6	24	117	-104	8-192	Single-Ended	VA = 3.5 to 5.0 VD = 3.0 to 5.5	2		28 SSOP
	WM8741	2	24	128	-100	192	Differential	VA = 4.5 to 5.5 VD = 3 to 3.6	2	Selectable advanced digital filter responses, HW and 2/3-wire SW control	28 SSOP
	WM8742	2	24	126	-100	192	Differential	VA = 4.5 to 5.5 VD = 3 to 3.6	2	Selectable advanced digital filter responses, HW and 2/3-wire SW control	28 SSOP
	WM8761	2	24	100	-90	192	Single-ended	VA = 2.7 to 5.5 VD = 2.7 to 5.5	1	HW control	14 SOIC
	WM8918	2	24	96	-86	8 – 96	Single-ended	VA = 1.71 to 2.0 VD = 1.42 to 3.6	1	5 band EQ, DRC, digital MIC interface, HP driver, FLL	32 QFN

Smart Codecs

	Part Number	DACs / ADCs	DAC Dynamic Range (dB)	DAC THD+N (dB)	ADC Dynamic Range (dB)	ADC THD+N (dB)	Sample Rate (kHz)	Analog I/O	Power Supply (V)	DSP and Other Features	Package
NEW	CS42L92	4 / 4	115	-100	98	-88	0-384	Differential	VA = 1.8 VD = 1.2	Integrated DSP provides general purpose signal processing capability	104 WLCSP
	CS47024	4 / 2	108	-98	105	-98	96	Differential	VA = 3.3 VD = 1.8	Single 32-bit DSP core, 150 MIPS, 5:1 MUX on ADC, clock PLL, 2ch hardware SRC, S/PDIF Tx	100 LQFP
	CS47028	8 / 2	108	-98	105	-98	96	Differential	VA = 3.3 VD = 1.8	Single 32-bit DSP core, 150 MIPS, 5:1 MUX on ADC, clock PLL, 8ch hardware SRC, S/PDIF Rx/Tx	100 LQFP
	CS47048	8 / 4	108	-98	105	-98	96	Differential	VA = 3.3 VD = 1.8	Single 32-bit DSP core, 150 MIPS, 5:1 MUX on one 2ch ADC, clock PLL, 8ch hardware SRC, S/PDIF Rx/Tx	100 LQFP
	CS47L15	3 / 2	115	-92	98	-88	8-192	Single-Ended; Differential	VA = 1.8 VD = 1.2	150 MIPS, 150 MMAC audio DSP; up to 4 analog or 4 digital mic inputs; 3 full digital audio interfaces	70 WLCSP
	CS47L24	3 / 0	115	-92			8-192	Single-Ended; Differential	VA = 1.8 VD = 1.2 to 1.8	300 MIPS, 300 MMAC dual-core audio DSP; 4 digital mic inputs; stereo headphone/earpiece/line output driver; mono 2 W Class D speaker output driver	63 WLCSP
	CS47L35	3 / 4	115	-93		-86	8-192	Single-Ended; Differential	VA = 1.8 VD = 1.2 to 1.8	450 MIPS, 450 MMAC multi-core audio DSP; 100 dB SNR mic input; 122 dB SNR headphone playback	101 WLCSP
	CS47L85	8 / 6	115	-91		-88	8-192	Single-Ended; Differential	VA = 1.2 to 1.8 VD = 1.2; 1.8 to 3.6	900 MIPS, 900 MMAC multi-core audio DSP; 3 stereo headphone/earpiece/line output drivers	176 WLCSP
	CS47L90	6 / 4	115	-93		-88	0-192	Single-Ended; Differential	VA = 1.8 VD = 1.2	975 MIPS, seven core audio DSP; up to 7 analog or 10 digital mic inputs	173 WLCSP
NEW	CS48L32	0/2	N/A	N/A	104	-88	8-192	Differential	VA = 1.8 VD = 1.2	Programmable HaloCore™ provides platform for low power input voice processing	64 WLCSP, 64 QFN
	WM5102/ WM5102S SOUNDCLEAR™	7 / 6	120	-89	96	-88	192	Single-ended Differential	VA = 1.7 to 5.5 VD = 1.14 to 1.9	Master Hi-Fi, Dynamic range control, parametric EQ, DSP filters, ASRC, haptic control signal generator, SLIMbus interface, 3x digital audio interface, HP/speaker amps, dual FLL	137 WLCSP
	WM8281 SOUNDCLEAR™	8 / 6	121	-92	100	-89	192	Single-ended Differential	VA = 1.7 to 5.5 VD = 1.14 to 1.9	Multi-core DSP, 600 MIPS, 600 MMC, programmable wideband, multi-mic audio processing, ASRC, haptic control signal generator, SLIMbus interface, PDM interface, 3x digital audio interface, HP/speaker amps, dual FLL	138 WLCSP

Portable Codecs

	Part Number	DACs / ADCs	DAC Dynamic Range (dB)	DAC THD+N (dB)	ADC Dynamic Range (dB)	ADC THD+N (dB)	Sample Rate (kHz)	Analog I/O	Power Supply (V)	Comments	Package
	CS42L42	2 / 1	114	-90	114	-85	8-192	Pseudo-Differential	VA = 1.8		49 WLCSP 48 QFN
	CS42L51	2 / 2	98	-86	96	-88	96	Single-ended	VA = 1.8 to 2.5 VD = 1.8 to 2.5 VL = 1.8 to 3.3	3:1 MUX, PGA, MIC pre-amp, HP amp	32 QFN
	CS42L52	2 / 2	98	-86	98	-88	96	Single-ended	VA = 1.65 to 2.83 VD = 1.65 to 2.83 VP = 2.37 to 5.35 VL = 1.8 to 3.3	4:1 MUX, PGA, MIC, pre-amp, HP/speaker amps	40 QFN
	CS42L73*	4 / 2	97	-85	91	-85	48	Pseudo-Differential	VA = 1.66 to 1.94 VD = 0.85 to 1.40 VP = 3.0 to 5.25 VCP = 1.66 to 1.94 VL = 1.66 to 1.94	Class-H HP amp, Class A/B speaker amp, 3x asynchronous serial ports	60 WLCSP 65 BGA
	CS46L41	2 / 2	130	91	103	85	192	2	VA = 4 VD = 3		62-ball WLCSP
	CS46L42	2 / 2	130	91	103	85	192	2	VA = 4 VD = -3		62-ball WLCSP

Portable Codecs (continued)

Part Number	DACs / ADCs	DAC Dynamic Range (dB)	DAC THD+N (dB)	ADC Dynamic Range (dB)	ADC THD+N (dB)	Sample Rate (kHz)	Analog I/O	Power Supply (V)	Comments	Package
WM8731	2 / 2	100	-86	90	-84	96	Single-ended	VA = 1.8 to 3.6 VD = 1.42 to 3.6	High pass filters, MIC input, HP amp, OSC	28 QFN
WM8750	2 / 2	98	-84	95	-82	96	Single-ended Differential	VA = 1.8 to 3.6 VD = 1.42 to 3.6	EQ, 3D, MIC interface ALC, HP/speaker amps	32 QFN
WM8904	2 / 2	96	-86	92	-80	96	Single-ended Differential	VA = 1.71 to 2 VD = 0.95 to 3.6	ReTune™ Mobile parametric EQ, dynamic range controller, DMIC interface, HP amp, FLL	32 QFN 36 WLCSP
WM8958	4 / 2	100	-83	94	-84	96	Single-ended Differential	VA = 1.71 to 5.5 VD = 1.0 to 3.6	ReTune™ Mobile, MBC, parametric EQ, dynamic range controller, ASRC, 4x DMIC interface, HP/speaker amps, dual FLL	72 WLCSP
WM8988	2 / 2	100	-90	93	-81	96	Differential	VA = 1.8 to 3.6 VD = 1.42 to 3.6	EQ, 3D, bass boost, MIC interface ALC, HP amp	28 QFN
WM8998	7 / 3	122	-89	96	-88	192	Single-ended Differential	VA = 1.7 to 5.5 VD = 1.14 to 3.74	Wind noise reduction, Dynamic range control, Parametric EQ, DSP filters, ASRC, SLIMbus interface, 3x digital audio interface, dual FLL	117 WLCSP

Mono/Stereo Codecs

Part Number	Channels	DAC Dynamic Range (dB)	DAC THD+N (dB)	ADC Dynamic Range (dB)	ADC THD+N (dB)	Sample Rate (kHz)	Analog I/O	Power Supply (V)	Comments	Package
CS4245	6 in, 2 out	104	-90	104	-95	192	Single-ended	VA = 3.3 or 5 VD = 3.3 or 5 VL = 1.8 to 5	6:1 input MUX, MIC pre-amp, PGA	48 LQFP
CS4265	2 in, 2 out	104	-90	104	-95	192	Single-ended	VA = 3.3 or 5 VD = 3.3 or 5 VL = 1.8 to 5	2:1 input MUX, MIC pre-amp, PGA, S/PDIF Tx	32 QFN
CS4270	2 in, 2 out	105	-95	105	-95	192	Single-ended	VA = 3.3 or 5 VD = 3.3 or 5 VL = 1.8 to 5	Volume control, passive filters, 3.3 V operation	24 TSSOP
CS4271	2 in, 2 out	114	-100	108	-98	192	Single-ended ADC Differential DAC	VA = 5 VD = 3.3 or 5 VL = 2.5 to 5	Volume control, on-chip oscillator	28 TSSOP
CS4272	2 in, 2 out	114	-100	114	-100	192	Differential	VA = 5 VD = 3.3 or 5	Volume control, on-chip oscillator	28 TSSOP
WM8510	1 in, 1 out	93	-84	90	-80	48	Differential ADC Single-ended DAC	VA = 2.5 to 5.5 VD = 1.71 to 3.6	ALC volume control, DSP filters, 2/3-wire SW control	28 SSOP
WM8758	4	100	-86	92.5	-75	8-48	Differential; Pseudo-differential	VA = 2.5-3.6 VD = 1.71-3.6		32 QFN
WM8940	1 in, 1 out	98	-84	94	-80	48	Differential ADC Single-ended DAC	VA = 2.5 to 5.5 VD = 1.71 to 3.6	ALC volume control, filters, Headphone driver, PLL	24 QFN
WM8960	4	98	-84	94	-82	8-48	Single-ended; Pseudo-differential	VA = 2.7-3.6 VD = 1.71-3.6		32 QFN
WM8974	1 in, 1 out	98	-84	94	-83	48	Differential ADC Single-ended DAC	VA = 2.5 to 5.5 VD = 1.71 to 3.6	ALC volume control, DSP filters, EQ, PLL	24 QFN
WM8976	3	98	-84	95	-84	8-48	Differential; Single-ended; Pseudo-differential	VA = 2.5-3.6 VD = 1.71-3.6		32 QFN
WM8978	4	98	-84	95	-84	8-48	Differential; Pseudo-differential	VA = 2.5-3.6 VD = 1.71-3.6		32 QFN
WM8983	4	98	-84	95	-84	8-48	Differential; Pseudo-differential	VA = 2.5-3.6 VD = 1.71-3.6		32 QFN
WM8985	4	98	-84	92.5	-83	8-48	Differential; Pseudo-differential	VA = 2.5-3.6 VD = 1.71-3.6		32 QFN

Multichannel Codecs

Part Number	Channels	DAC Dynamic Range (dB)	DAC THD+N (dB)	ADC Dynamic Range (dB)	ADC THD+N (dB)	Sample Rate (kHz)	Analog I/O	Power Supply (V)	Comments	Package
CS4234	4 in, 5 out	108	-90	105	-95	192	Single-ended or Differential	VA = 3.3 or 5 VL = 1.8 to 5	PCM and TDM interfaces	40 QFN
CS42432	4 in, 6 out	108	-98	105	-98	192	Single-ended or Differential	VA = 3.3 or 5 VD = 3.3 VL = 1.8 to 5	TDM interface	52 MQFP
CS42435	4 in, 8 out	108	-98	105	-98	192	Single-ended or Differential	VA = 3.3 or 5 VD = 3.3 VL = 1.8 to 5	TDM interface	52 MQFP
CS42436/38	6 in, 6/8 out	105 / 108	-95 / -98	102 / 105	-95 / -98	192	Single-ended or Differential	VA = 3.3 or 5 VD = 3.3 VL = 1.8 to 5	TDM interface	52 MQFP
CS4244	4 in, 4 out	108	-90	105	-95	192	Single-ended or Differential	VA = 3.3 or 5 VL = 1.8 to 5	PCM and TDM interfaces	40 QFN
CS42448	6 in, 8 out	108	-98	105	-98	192	Single-ended or Differential	VA = 3.3 or 5 VD = 3.3 to 5 VL = 1.8 to 5	PCM and TDM interfaces	64 LQFP
CS42516/26	2 in, 6 out	110 / 114	-100	114	-100	192	Differential	VA = 5 VD = 3.3 or 5 VL = 1.8 to 5	S/PDIF Rx, digital volume control	64 LQFP
CS42518/28	2 in, 8 out	110 / 114	-100	114	-100	192	Differential	VA = 5 VD = 3.3 or 5 VL = 1.8 to 5	S/PDIF Rx, digital volume control	64 LQFP
CS42888	4 in, 8 out	108	-98	105	-98	192	Single-ended or Differential	VA = 3.3 or 5 VD = 3.3 or 5 VL = 1.8 to 5	PCM and TDM interfaces	64 LQFP
WM8994	6	100	-87	95	-82	8-96	Differential; Single-ended	VA = 1.8-3.3 VD = 1-3.3		72 WLCSP

AC '97 and HD Audio Codecs

Part Number	Bus Interface	DAC SNR/THD+N (dB)	ADC SNR/THD+N (dB)	Feature	Converters	Package
CS4207	HD-Audio	110 / -94	105 / -88	S/PDIF receiver with SRC, 2 S/PDIF transmitters, MIC pre-amp, HP amp, 2 DMIC inputs	Six 192 kHz DACs Four 96 kHz ADCs	48 QFN
WM9714	AC '97	94 / -85	87 / -86	S/PDIF transmitter	18-bit stereo DAC 18-bit stereo ADC	48 QFN

Stereo Low Power Codecs with Touchscreen Controller

Part Number	DACs / ADCs	Headphone driver	BTL speaker out	Control + data interface	Power Supply (V)	Features	Package
WM9712	3 / 3	Yes, 45 mW into 16 ohms	Yes, 400 mW	AC '97	VA = 1.8 to 3.6 VD = 1.5 to 3.6	AUX ADC, battery monitor	48 QFN
WM9713	4 / 3	Yes, 45 mW into 16 ohms	Yes, 400 mW	AC '97 PCM, I ² S	VA = 1.8 to 3.6 VD = 1.8 to 3.6	AUX ADC, battery monitor	48 QFN
WM9715	3 / 3	Yes, 45 mW into 16 ohms	Yes, 400 mW	AC '97	VA = 1.8 to 3.6 VD = 1.5 to 3.6	AUX, ADC, battery monitor	48 QFN

Low Power Codecs with Integrated Video Buffer

Part Number	DACs / ADCs	DAC SNR/THD+N (dB)	ADC SNR/THD+N (dB)	Headphone driver	Power Supply (V)	Features	Package
WM8944	1 / 1	96 / -80	94 / -83	Yes	VA = 2.4 to 3.6 VD = 1.7 to 3.6	AUX ADC, battery monitor	48 QFN
WM8946	2 / 2	98 / -80	94 / -83	Yes	VA = 2.4 to 3.6 VD = 1.7 to 3.6	AUX, ADC, battery monitor	48 QFN

Audio Amplifiers

Part Number	Description	Vout(V) - Max	Output Power (W) @1% THD+N, into 8 ohm	DSP	Boost	Channels	Inputs	Supply (V)	Idle Power Consumption (mW)	Idle Noise (uV)	Size (mm ²)	Package	Pitch (mm)
CS35L37	Boosted Class-D Smart Amp	12	5.4	No	Class-H	Mono	I ² S, TDM	2.5 - 5.5	4.4	9	5.64	33 WLCSP	0.4
CS35L41	Boosted Class-D Smart Amp + DSP	11	5.3	Yes	Class-H	Mono	I ² S, TDM	2.5 - 5.5	6.7	9	6.43	30 WLCSP	0.4
WM9081	EQ, Dynamic range control, FLL		2.6 W into 4 ohm				Analog, I ² S	VP = 2.7 to 5.5 VA = 2.7 to 3.6 VD = 1.71 to 3.6				28 QFN	

Volume Control

Part Number	Channel	Dynamic Range (dB)	THD+N (dB)	Analog I/O	Power Supply (V)	Comments	Package
CS3308	8	123	-112	Single-ended	VA = ±5 VD = 3.3	+22 dB gain / -96 dB attenuation, 0.25 dB step	48 LQFP
CS3310	2	116	-100	Single-ended	VA = ±5 VD = 5	+31.5 dB gain / -95.5 dB attenuation, 0.5 dB step	16 SOIC
CS3318	8	127	-112	Single-ended	VA = ±8 to ±9 VD = 3.3	+22 dB gain / -96 dB attenuation, 0.25 dB step	48 LQFP

Interfaces and Sample Rate Converters

Part Number	Sample Rate (kHz)	S/PDIF, IEC-60958 Transmitter	S/PDIF, IEC-60958 Receiver	AES/EBU	EIAJ CP1201	Host Interface	Sample Rate Converter	Power Supply (V)	Package
CS8406	192	1	—	✓	✓	✓	—	VD = 3.3 or 5 VL = 3.3 or 5	28 SOIC 28 TSSOP
CS8421	192	—	—	—	—	—	✓	VD = 2.5 VL = 3.3 or 5	20 TSSOP 20 QFN
CS8422	192	—	1	✓	✓	✓	✓	VA = 3.3 VL = 1.8 to 5	32 QFN
WM8804	192	1	1	✓	—	✓	—	VD = 2.7 to 3.6	20 SSOP
WM8805	192	1	8	✓	—	✓	—	VD = 2.7 to 3.6	28 SSOP

Clock Generation and Jitter Reduction

Part Number	One-Time Programmable	Frequency Synth / Clock Generator	Clock Multiplier / Jitter Remover	Power Supply (V)	Input Frequency Range	Reference Frequency Range	Output Frequency Range	Package
CS2000	CS2000-OTP	✓	✓	3.3	50 Hz to 30 MHz	8 to 75 MHz	6 to 75 MHz	10 MSOP
CS2100	CS2100-OTP	—	✓	3.3	50 Hz to 30 MHz	8 to 75 MHz	6 to 75 MHz	10 MSOP
CS2200	CS2200-OTP	✓	—	3.3	—	8 to 75 MHz	6 to 75 MHz	10 MSOP
CS2300	CS2300-OTP	—	✓	3.3	50 Hz to 30 MHz	Internally generated	6 to 75 MHz	10 MSOP

Imaging A/D Converters

Part Number	Resolution (bits)	Speed (MSPS)	Input PGA	Offset (bits)	Output format	Control interface	Supply	Power (mW)	Description	Package
WM8196	16	12	8	8	CMOS: 8+8 4x4	Serial	4.8 to 5.2	300	3-channel CCD/CIS ADC	28 SSOP
WM8199	16	20	8	8	CMOS: 8+8 4x4	Serial	4.8 to 5.2	360	3-channel high speed CCD/CIS ADC	28 SSOP
WM8213	16	24	9	8	CMOS: 8+8 4x4	Serial	3.0 to 3.6	350	3-channel CCD/CIS ADC	28 SSOP
WM8214	16	40	9	8	CMOS: 8+8 4x4	Serial	3.0 to 3.6	390	3-channel high speed CCD/CIS ADC	28 SSOP
WM8215	10	60	9	8	CMOS: 10-bit	Serial	3.0 to 3.6	360	3-channel high speed CCD/CIS ADC	32 QFN
WM8224	10 & 16	40 & 60	9	8	CMOS 10 (10-bit), 8+8 (16-bit)	Serial	3.0 to 3.6	360	3-channel high speed CCD/CIS ADC — Multiple Device Operation and automatic black level calibration	32 QFN
WM8233	16	70	12-bit	8	LVDS 10-bit 5 pair LVDS 16-bit 5 pair CMOS 10-bit	Serial	3.3 V		6-channel high speed CCD/CIS ADC	56 QFN package 8 mm x 8 mm
WM8234	16	70	12-bit	8	LVDS 10-bit 5 pair LVDS 16-bit 5 pair CMOS 10-bit	Serial	3.3 V		6-channel high speed CCD/CIS ADC	56 QFN package 7 mm x 7 mm
WM8235	16	70	12-bit	8	LVDS 10-bit 5 pair LVDS 16-bit 5 pair CMOS 10-bit	Serial	3.3 V		9-channel high speed CCD/CIS ADC	56 QFN package 7 mm x 7 mm
WM8255	16	12	8	8	CMOS: 4x4, 2x8	Serial	3.3 to 3.75	250	Single channel CCD/CIS ADC	28 QFN

Software Partners

Cirrus Logic has established a comprehensive ecosystem of software partners who provide technologies that significantly expand the use cases supported by Cirrus Logic smart codec range of products. By establishing partnerships with world-leading software companies, in combination with its high performance and low power built-in DSP technology, Cirrus Logic makes available to its customers a wide range of optimized audio functions across four domains: Voice, Playback, Record and Control. Cirrus Logic Software Partners' technologies offer customers a variety of different options to differentiate their products including:

- Audio Solution Architecture
- Mechanical and Acoustic Product Design
- Hardware and PCB Design
- Software Porting and Optimization
- Software Development and Integration
- Tuning Services
- Test, Validation and Certification

Voice Solutions Partner



Playback Solutions Partner



Record Solutions Partner



Control Solutions Partner



A Global Network of Professional Service Partners

Combining hardware and software into a single audio solution can pose a unique set of challenges. Each customer's design can have its own specific challenges ranging from form factor prototyping and acoustic tuning, to software stack integration. To assist customers in this development process, Cirrus Logic established a global network of trusted service partners who have been thoroughly vetted to provide customers with the right services to address these pivotal elements. This growing community of Professional Service Partners (PSPs) meets our exacting standards for quality and competence, and are fully equipped to support customers in perfecting the very best audio signal processing solution.



Quality

- Trained by Cirrus Logic
- Engineering support from Cirrus Logic and third party software partners



Scale

- Globally located
- Enables fast time-to-market
- Wide range of capabilities, no project too small!




Competence

- Software and hardware integration
- Full-form factor design
- Audio tuning, testing

Partner Competencies

Cirrus Logic's growing community of Professional Service Partners are fully equipped and trained to address the challenges of building audio solutions tailored to each customer's exacting specifications. Our PSP network can provide a wide range of technical competencies to support the implementation of hardware and software solutions.

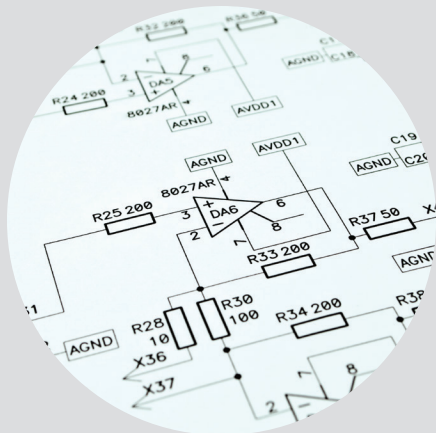

Technical Know-How

- System and architecture
- Audio and acoustic
- Embedded software
- Hardware and mechanical



Proven Audio Track Record

- Demonstrable expertise and experience in audio sub-system design
- Audio products delivered to the marketplace



Audio Laboratory and Services

- Audio measurements
- Audio test equipment
- Acoustic equipment, facilities, measurement and tuning

Our Global Support Network

How can we work together? Contact us today.

NOVUS
novuslabs.com

- ADSP
- Integration
- Tuning and testing
- Technical Staffing
- Contact us:
service@novuslabs.com

 **Cambridge Consultants**

- ADSP
- Integration
- Tuning and testing
- Contact us:
jez.stark@cambridgeconsultants.com

 **SIGMA**
Expect a better tomorrow

- ADSP
- Integration
- Tuning and testing
- Contact us:
Christian.Axelsson@sigmaconnectivity.se



surfaceink

- ADSP
- Integration
- Tuning and testing
- Contact us:
sagar_savant@surfaceink.com



eSoftThings

- ADSP
- Integration
- Tuning and testing
- Contact us:
kimmo@esoftthings.com



 **sasken**

- ADSP
- Tuning and testing
- Contact us:
nishith.dhawan@sasken.com



SoCtronics

- ADSP
- Porting and integration
- Contact us:
suman.kopparapu@soctrionics.com



For more information, visit [support/partners/services](https://support/partners/services.cirrus.com) on cirrus.com.

Communication Components

Cirrus Logic continues to maintain a design legacy for high-precision analog and mixed-signal processing ICs for industrial measurement applications — such as industrial process control, analytical instruments, and consumer utility. This design expertise is based on an advanced proprietary Delta-Sigma technology that is featured across a core group of product families including analog-to-digital converters, digital-to-analog converters, modulator and amplifier ICs, and ARM 9-based system-on-chip processors. As a pioneer in the development of world-class telecommunication ICs, Cirrus Logic also continues a lengthy tenure of providing customers with cost effective signal processing solutions.

Delta-Sigma A/D Converters

CS5510
CS5511
CS5512
CS5513
CS5529

Delta-Sigma A/D Converters with Integrated Amplifiers

CS5521
CS5522
CS5523
CS5524
CS5525
CS5526
CS5528
CS5530
CS5531
CS5532
CS5533
CS5534
CS5550

Energy Measurement

CS5451A
CS5463
CS5464
CS5467
CS5480
CS5484
CS5490

Ethernet

CS8900A
CS8952*

Delta-Sigma A/D Converters

Part Number	Resolution (bits)	Throughput (Sps)	Integral Linearity (%FS)	Differential Linearity ($\pm$ LSB)	Number of Channels	Power Consumption (mW)	Package
CS5510	16	53 – 212	0.0015%	NMC	1	1.4	8 SOIC
CS5511	16	100 (typical)	0.0015%	NMC	1	1.5	8 SOIC
CS5512	20	53 – 326	7.0E-4%	NMC	1	1.8	8 SOIC
CS5513	20	100 (typical)	7.0E-4%	NMC	1	1.9	8 SOIC
CS5529	16	1 – 303	0.0015%	NMC	1	2.6	20 SOIC

Delta-Sigma A/D Converters with Integrated Amplifiers

Part Number	Resolution (bits)	Throughput (Sps)	Integral Linearity (%FS)	Differential Linearity ($\pm$ LSB)	Number of Channels	Power Consumption (mW)	Package
CS5521	16	1 – 400	0.0015%	NMC	2	6	20 SSOP
CS5522	24	1 – 606	7.0E-4%	NMC	2	9	20 SSOP
CS5523	16	1 – 400	0.0015%	NMC	4	6	24 SSOP
CS5524	24	1 – 606	7.0E-4%	NMC	4	9	24 SSOP
CS5525	16	3 – 606	0.0015%	NMC	1	9.4	20 SSOP
CS5526	20	3 – 606	7.0E-4%	NMC	1	9.4	20 SSOP
CS5528	24	1 – 606	7.0E-4%	NMC	8	9	24 SSOP
CS5530	24	7 – 3840	$\pm$ 0.0015%	NMC	1	35	20 SSOP
CS5531	16	7 – 3840	$\pm$ 0.0015%	NMC	2	35	20 SSOP
CS5532	24	7 – 3840	$\pm$ 0.0015%	NMC	2	35	20 SSOP
CS5533	16	7 – 3840	$\pm$ 0.0015%	NMC	4	35	24 SSOP
CS5534	24	7 – 3840	$\pm$ 0.0015%	NMC	4	35	24 SSOP
CS5550	24	2440 – 4000	0.01%	NMC	2	21	24 SSOP

Energy Measurement

Part Number	ADC Converters	Current Sensor Options	Active Energy Accuracy, Dynamic Range	Reactive Energy Accuracy, Dynamic Range	IRMS Accuracy, Dynamic Range	SNR (dB)	Serial Comm	Digital Outputs	V _{REF} Drift (ppm/°C)	Input Voltage (V)	Power Cons. (mW)	Package
CS5451A	6	Shunt / CT	—	—	—	77	SPI	—	25	3 Analog; 3 Digital	23	28 SSOP
CS5463	2	Shunt / CT	0.1%, 1000:1	0.2%, 1000:1	0.2%, 1000:1	78	SPI	Energy Pulses	40	5 Analog; 3.3 / 5 Digital	21	24 SSOP
CS5464	3	Shunt / CT	0.1%, 1000:1	0.2%, 1000:1	0.2%, 1000:1	78	SPI	Energy Pulses	40	5 Analog; 3.3 / 5 Digital	25	28 SSOP
CS5467	4	Shunt / CT	0.1%, 1000:1	0.2%, 1000:1	0.2%, 1000:1	78	SPI	Energy Pulses	40	5 Analog; 3.3 / 5 Digital	25	28 SSOP
CS5480	3	Shunt / CT / Rogowski	0.1%, 4000:1	0.1%, 4000:1	0.15%, 1000:1	80	UART	3x Configurable Outputs	25	3.3	13	24 QFN
CS5484	4	Shunt / CT / Rogowski	0.1%, 4000:1	0.1%, 4000:1	0.1%, 1000:1	80	SPI / UART	4x Configurable Outputs	25	3.3	13	28 QFN
CS5490	2	Shunt / CT / Rogowski	0.1%, 4000:1	0.1%, 4000:1	0.1%, 1000:1	80	SPI / UART	Single Configurable Output	25	3.3	13	16 SOIC

Ethernet

Part Number	Media Supported	Digital Interface	Number of Channels	Power Supply	Package
CS8900A	10BASE-T	ISA and general purpose parallel	1	5 V, 3.3 V	100 LQFP
CS8952*	10BASE-T, 100BASE-X and NRZ (optical)	MII	1	5 V with support of 3.3 V digital I/O	100 TQFP

Product Number Index

Product Number Index


CS2000.....	11	CS47L24.....	7	CS8421.....	11
CS2100.....	11	CS47L35.....	7	CS8422.....	11
CS2200.....	11	CS47L85.....	7	CS8900A.....	16
CS2300.....	11	CS47L90.....	7	CS8952*.....	16
CS3308.....	10	CS48L10.....	4	WM1824.....	6
CS3310.....	10	CS48L11.....	4	WM8196.....	11
CS3318.....	10	CS48L32.....	4, 7	WM8199.....	11
CS35L37.....	10	CS495314.....	4	WM8213.....	11
CS35L41.....	10	CS497014.....	4	WM8214.....	11
CS4207.....	10	CS497024.....	4	WM8215.....	11
CS4234.....	9	CS49834.....	4	WM8224.....	11
CS42432.....	9	CS49844.....	4	WM8233.....	11
CS42435.....	9	CS5340.....	5	WM8234.....	11
CS42436/38.....	9	CS5341.....	5	WM8235.....	11
CS4244.....	9	CS5342.....	5	WM8255.....	11
CS42448.....	9	CS5343.....	5	WM8281.....	7
CS4245.....	8	CS5344.....	5	WM8510.....	8
CS42516/26.....	9	CS5346.....	5	WM8523.....	6
CS42518/28.....	9	CS5351.....	5	WM8524.....	6
CS4265.....	8	CS5361.....	5	WM8716.....	6
CS4270.....	8	CS5364.....	5	WM8731.....	8
CS4271.....	8	CS5366.....	5	WM8737.....	5
CS4272.....	8	CS5368.....	5	WM8740.....	6
CS42888.....	9	CS5381.....	5	WM8741.....	6
CS42L42.....	7	CS53L21.....	5	WM8742.....	6
CS42L51.....	7	CS53L30.....	5	WM8750.....	8
CS42L52.....	7	CS5451A.....	16	WM8758.....	8
CS42L73*.....	7	CS5463.....	16	WM8761.....	6
CS42L92.....	7	CS5464.....	16	WM8804.....	11
CS43130.....	6	CS5467.....	16	WM8805.....	11
CS43131.....	6	CS5480.....	16	WM8904.....	8
CS43198.....	6	CS5484.....	16	WM8918.....	6
CS4334/35/38/39.....	6	CS5490.....	16	WM8940.....	8
CS4344/45/48.....	6	CS5510.....	16	WM8944.....	10
CS4349.....	6	CS5511.....	16	WM8946.....	10
CS4350.....	6	CS5512.....	16	WM8958.....	8
CS4354.....	6	CS5513.....	16	WM8960.....	8
CS4361.....	6	CS5521.....	16	WM8974.....	8
CS4362A/82A.....	6	CS5522.....	16	WM8976.....	8
CS4365/85.....	6	CS5523.....	16	WM8978.....	8
CS4385A.....	6	CS5524.....	16	WM8983.....	8
CS4398.....	6	CS5525.....	16	WM8985.....	8
CS4399.....	6	CS5526.....	16	WM8988.....	8
CS43L21.....	6	CS5528.....	16	WM8994.....	9
CS43L22.....	6	CS5529.....	16	WM8998.....	8
CS43L36.....	6	CS5530.....	16	WM9081.....	10
CS46L41.....	7	CS5531.....	16	WM9712.....	10
CS46L42.....	7	CS5532.....	16	WM9713.....	10
CS47024.....	7	CS5533.....	16	WM9714.....	10
CS47028.....	7	CS5534.....	16	WM9715.....	10
CS47048.....	7	CS5550.....	16		
CS47L15.....	7	CS8406.....	11		

Copyright © 2020 Cirrus Logic, Inc.
All rights reserved
Printed in the USA

Cirrus Logic, Inc. and its subsidiaries ("Cirrus") believe that the information contained in this document is accurate and reliable. However, the information is subject to change without notice and is provided 'as is' without warranty of any kind (express or implied). Customers are advised to obtain the latest version of relevant information to verify, before placing orders, that information being relied upon is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, indemnification, and limitation of liability. No responsibility is assumed by Cirrus for the use of this information, or for infringement of patents or other rights of third parties. This document is the property of Cirrus and, by furnishing this information, Cirrus grants no license, express or implied, under any patents, mask work rights, copyrights, trademarks, trade secrets, or other intellectual property rights. No part of this publication may be copied, reproduced, stored in a retrieval system, or transmitted, in any form or by any means (electronic, mechanical, photographic, or otherwise) unless distributed in its entirety with all copyright notices attached. No part of this publication may be used as a basis for manufacture or sale of any items without the prior written consent of Cirrus.

Certain applications using semiconductor products may involve potential risks of death, personal injury, or severe property or environmental damage ("critical applications"). Cirrus products are not designed, authorized, or warranted to be suitable for use in products surgically implanted into the body, automotive safety or security devices, life-support products or other critical applications. Inclusion of Cirrus products in such applications is understood to be fully at the customer's risk and Cirrus disclaims and makes no warranty of merchantability and fitness for particular purpose, with regard to any Cirrus product that is used in such a manner. If the customer uses or permits the use of Cirrus products in critical applications, customer agrees, by such use, to fully indemnify Cirrus, its officers, directors, employees, distributors and other agents from any and all liability, including attorneys' fees and costs, that may result from or arise in connection with these uses.

Cirrus Logic, Cirrus, Band Xpander, CLIDE (Cirrus Logic Integrated Development Environment), Cirrus Bass Enhancement (CBE), Cirrus Dynamic Volume Leveler (DVL), Cirrus Virtualizer Technology (CVT), CobraCAD, CobraCom, CobraNet, Crystal LAN, DSP Composer, DSP Condenser, DSP Conductor, Entertainment Processors, EXL Core, Extreme-S, Intelligent Room Calibration, MaverickCrunch, MaverickKey, Micro Condenser, Multipath, Optimal Integration, PacketPage, Popguard, Single-S, SoundClear, Total-S, Cirrus Logic framework, Cirrus Extended Surround, and the Cirrus Logic logo designs are among the trademarks of Cirrus Logic, Inc. and/or its subsidiaries. All other brand and product names in this document may be trademarks or service marks of their respective owners.

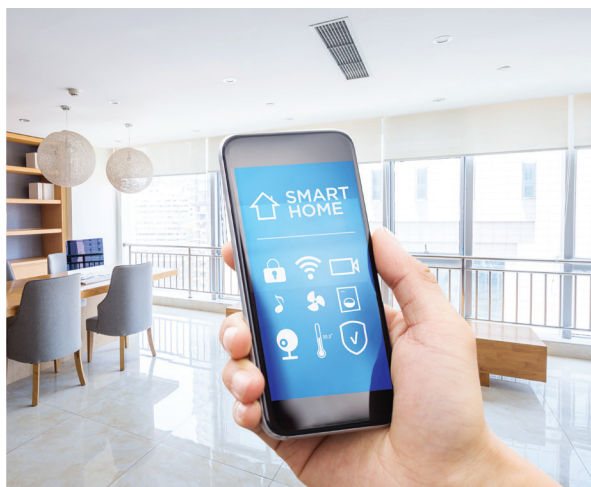

CORPORATE HEADQUARTERS
800 West Sixth Street
Austin, Texas 78701
United States

T +1 512-851-4000
Toll Free +1 800-888-5016

cirrus.com

FEBRUARY 2020